

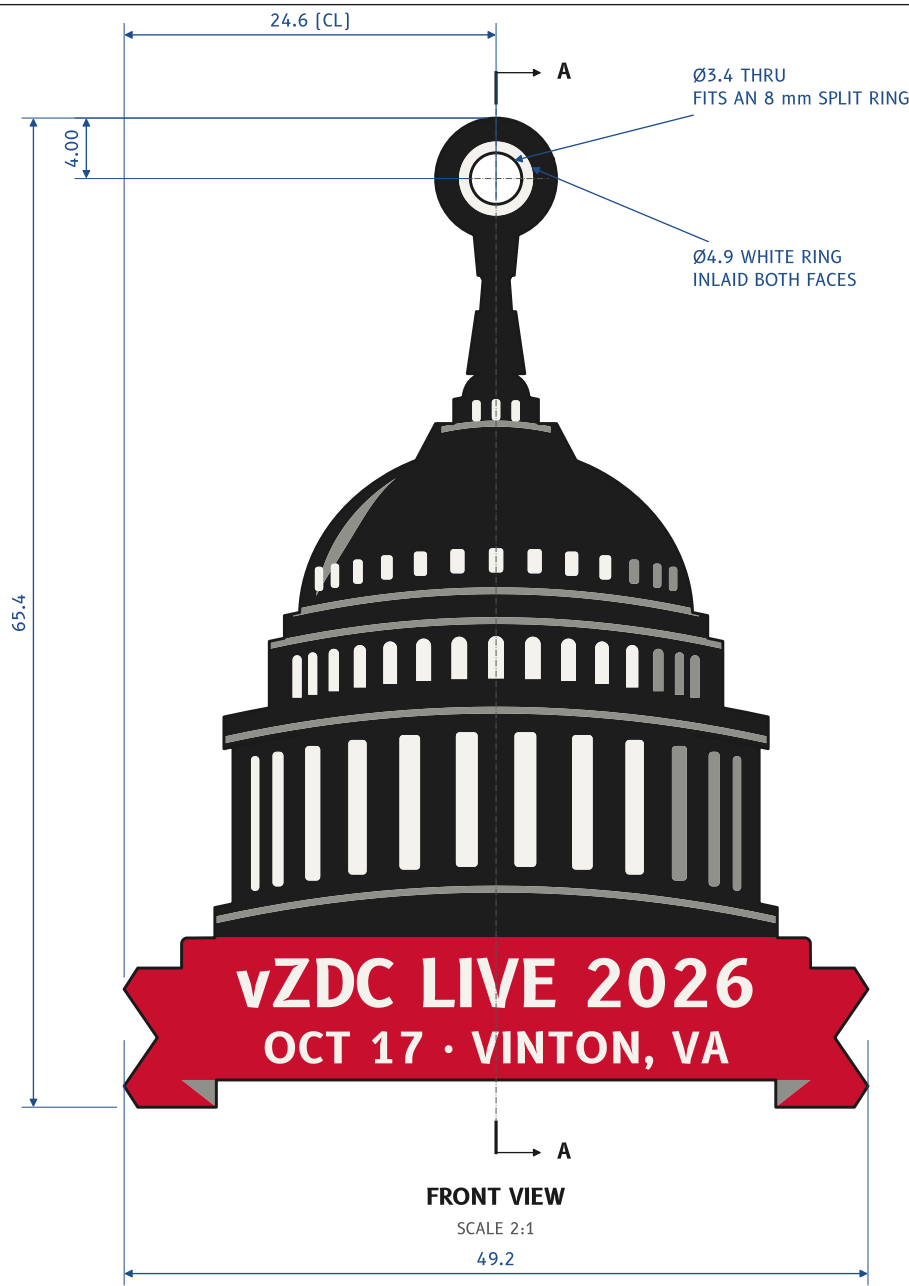


RIGHT SIDE
SCALE 2:1

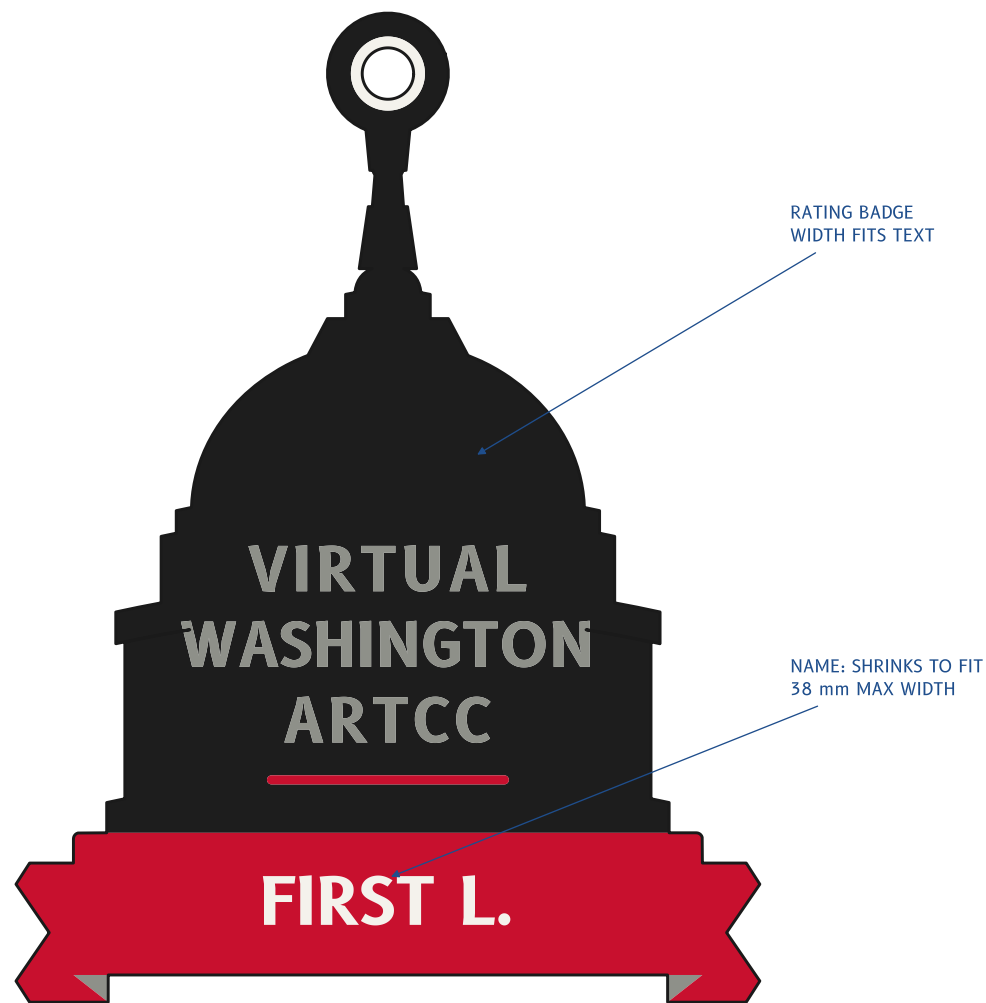

BACK VIEW
SCALE 2:1 · SAMPLE: FIRST L.

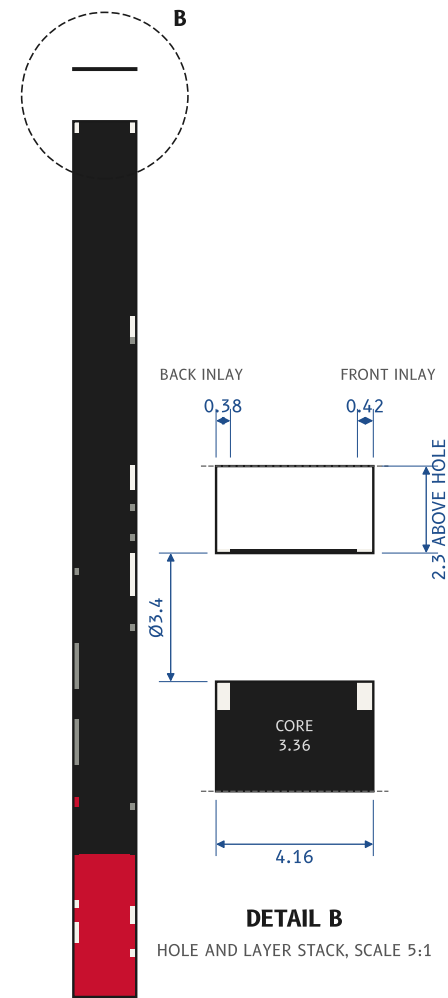

SECTION A-A
SCALE 2:1

DETAIL B
HOLE AND LAYER STACK, SCALE 5:1



3D REFERENCE

Rendered from the print files.
Not to scale. Split ring shown
for reference, not printed.

NOTES

- Material: PLA [Bambu PLA Basic], 4 colors via AMS. Bambu Lab P2S, 0.2 mm nozzle.
- Print BACK face down [fewer small islands on layer 1]. First layer 0.1 mm, then 0.14 mm. Iron the top [front].
- Flush colour inlays, 3 layers each face: 0.38 mm back, 0.42 mm front. Core 3.36 mm.
- Ribbon is red through its full thickness. All other core material is black.
- Minimum feature 0.55 mm. Minimum text cap height 1.9 mm [thinnest stroke 0.6 mm].
- Back ribbon is one free text field per attendee; rating and CID optional. See attendees.csv.
- Dimensions in mm. General tolerance ± 0.2 unless noted.
- Layer 1 carries small colour islands: no island is narrower than 0.3 mm, elephant-foot compensation is 0, one wall on layer 1, brim 8 mm, 25 mm/s, cooling fans off for the first 4 layers. Filament order every layer is black.

SLOT	FILAMENT	WHERE	VOLUME	MASS
1	BLACK	Body, columns, dome	4192 mm ³	5.20 g
2	WHITE	Windows, hole ring, text	101 mm ³	0.13 g
3	GRAY	Lines, shading, ARTCC text	74 mm ³	0.09 g
4	RED	Ribbon [full depth], badge	1846 mm ³	2.29 g

Masses are the part only. Purge adds about 14 g per plate of 10-11, about 1.4 g each.

vZDC LIVE 2026 KEYCHAIN

Night Ribbon · Virtual Washington ARTCC · Oct 17 · Vinton, VA

SAMPLE: FIRST L. · · · TOP: SPIRE

PART NO.
ZDC-KC-2026-01

UNITS / TOL.
mm · ± 0.2

SCALE
2:1 · DETAIL 5:1

DATE · SHEET
2026-10-08 · 1/1