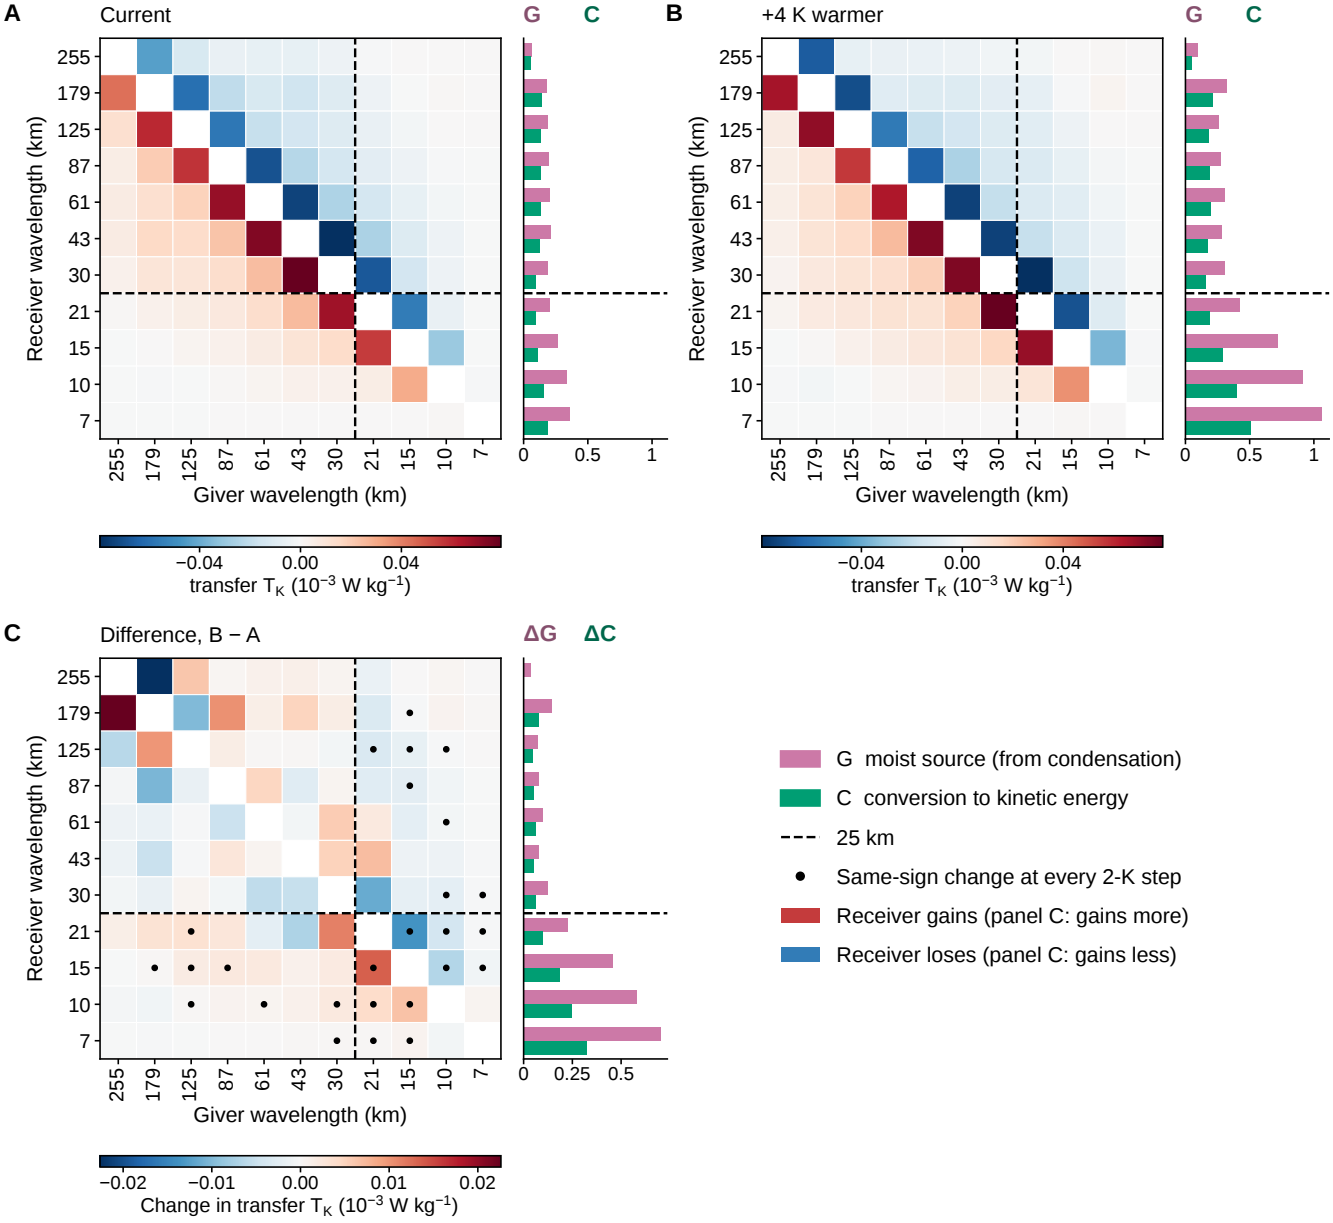
A
Current
G
C
B
+4 K warmer
Receiver wavelength (km)
Giver wavelength (km)
255
179
125
87
61
43
30
21
15
10
7
0
0.5
1
−0.04
0.00
0.04
transfer T_K (10^{-3} W kg^{-1})
C
Difference, B − A
ΔG
ΔC
0.25
−0.02
−0.01
0.01
0.02
Change in transfer T_K (10^{-3} W kg^{-1})
G moist source (from condensation)
C conversion to kinetic energy
25 km
Same-sign change at every 2-K step
Receiver gains (panel C: gains more)
Receiver loses (panel C: gains less)