

## Intelligent Video Telematics Solution

*Extraordinary, Versatile, Outstanding*



# K165 | K265

MiTAC K165/265 is one of the most advanced all-in-one connected digital camera solution. K165/265 can help fleet managers evolve from tracking only technology to the new video telematics era. Built in with powerful Qualcomm® QCS610 processor enhances the AI computing power. The Andorid Platform simplified both system and cloud integration. High speed 4G LTE allows remote live view to ensure operators have full awareness over the whole fleets. The dual SD card design avoids any slow card status occurred. The K165/265 is the ultimate connected digital recorder for those who need the ultimate demand.



### Always connected

- Built-in 4G LTE Cat.4 & dual-band WIFI
- Over-the-Air firmware & setting updates
- Bluetooth® 5.0 BLE, NFC / HF RFID



### Track your fleets in real-time

- Comprehensive satellite tracking
- Automotive dead reckoning (ADR) for precise positioning even in adverse conditions (optional)
- 3-axis G-sensor and Gyro support



### Reliable and flexible platform

- Qualcomm® Octa-core & Android™ 10
- Open APIs & SDK for seamless integration with fleet management solutions



### Get the full picture of your vehicles

- ECU integration to acquire vehicle and engine telematics data \*
- All video footage are safely stored both on the SD card and Cloud
- Embed powerful AI



### Dual SD card slots


- Options for dual SD card recording under multi-channel operation scenario




### Expandable channels

- Expand up to 5 extra cameras

\* Only when equipped with Smart Cable



## DETAILED VIEW

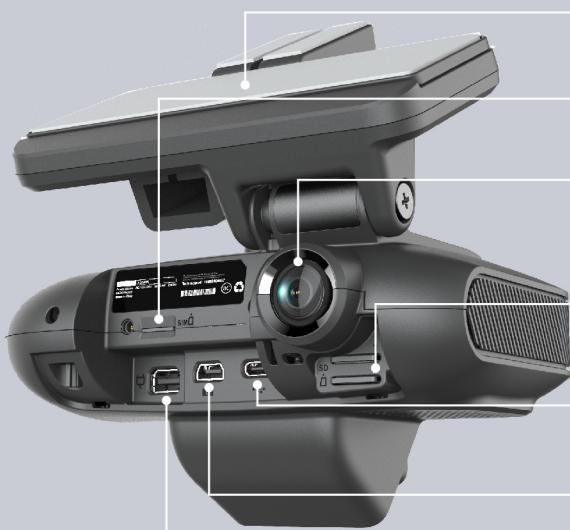

### WINDSHIELD MOUNTING

Easy to install in minutes

### NANO SIM OR eSIM AS OPTION

LTE Cat. 4

### ROAD FACING CAMERA

- Full HD 1920 x 1080 pixels
- Wide 142° FOV

### DUAL SD CARD SLOT

Storage up to 1TB/ Slot

### USB TYPE C


For data transfer, debug, and USB camera connection

### MINI USB

4 TVI cameras connection

### ALL-IN-ONE CONNECTOR

- Connect to vehicle battery
- Optional ECU integration

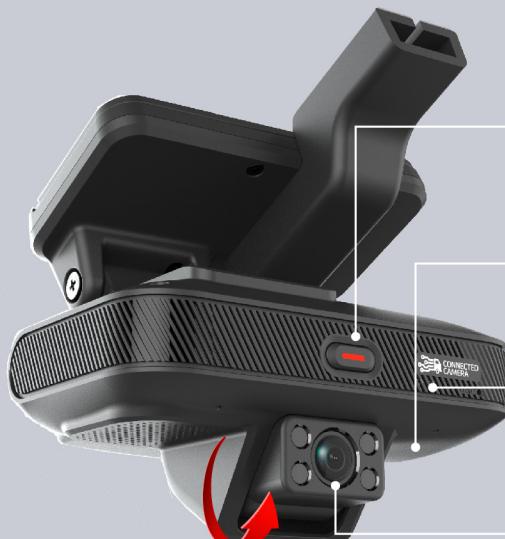

### EMERGENCY RECORDING BUTTON

Manually press button to protect the clip from being overwritten

### NFC

For driver ID verification & instant pairing with other devices

### LED STATUS INDICATORS X 2



### INWARD CAMERA

- Full HD 1920 x 1080 pixels
- Wide 142° FOV
- IR LED \*4 for low light visibility
- 45° tiltable camera angle



### TAMPER PROOF COVER

## OPERATIONAL SCENARIO



### DEDICATED VEHICLES

- Video recordings with SD card
- ADAS & DMS (AI)
- Dual-cam synchronized recording



### EXPANDABLE CHANNELS

- Expand up to 5 extra cameras



### FLEET MANAGEMENT CONSOLE

- Dashboard • Track history
- Geo-Fencing • Live view
- Event notification



### CLOUD-BASED INFRASTRUCTURE

- Sensor / Telematics data
- Event videos • Images



## ACCESSORIES

### ENTRY CABLE



### OBD POWER CABLE



### PANIC BUTTON



### SMART CABLE



### EXTERNAL CAMERA



Optional camera connected via USB type C connector  
 • A50 rear camera  
 • i15/ i25 DMS/ in-cabin camera

### WATERPROOF CAMERA



Optional side camera connected via TVI singal

Sold separately  
PN: 422N70200005

Standard accessory  
PN: 422N70200008

Sold separately

Sold separately  
PN: 340N69300003

Sold separately

Sold separately  
PN: 531610000130

# K165 | K265

## SPECIFICATION



**K165**



**K265**

Platform	Qualcomm® QCS610 Octa Core CPU, 2+6 Kryo, 2.2GHz/ 1.8GHz		
OS	Android™ 10 (non GMS)		
Memory	4GB RAM/32GB Internal Storage		
Storage	Dual Micro SD Slots (Support up to 512 GB/ slot)		
Wireless Interface	IEEE 802.11 a/ b/ g/ n/ ac (2.4 GHz & 5 GHz) Bluetooth® 5.0 BLE Non ADR: Qualcomm® Internal GPS/ ADR: U-Blox NEO-M8L LTE Cat. 4		
EMEA, Russia, South Africa	FDD Band 1/3/7/8/20/28A TDD Band 38/40/41 WCDMA Band 1/8 GSM Band 3/8	North America (transit in Mexico)	FDD Band 2/4/5/12/13/14/66/71
NFC	NFC: MiFare®, FeliCa I RFID (HF): ISO14443A&B, ISO15693		
Sensors	3-axis Accelerometer, 3-axis Gyro, Thermal Sensor		
Camera	<b>Forward:</b> FOV: D 142.8°/ H 120.4°/ V 63.8° (±5%) Full HD 1920 x 1080 @ 30 fps (Configurable) <b>Inward (IR):</b> FOV: D 142.8°/ H 120.4°/ V 63.8° (±5%) Full HD 1920 x 1080 @ 30 fps (Configurable)		
Expandable Cameras	TVI x 4, USB x 1		
Physical Interface	Dual Micro SD Slots (Support up to 1TB / slot) Nano SIM Slot (SIM 1) and eSIM** (SIM 2) Mini USB x 1 (for Ext. Cameras), USB Type C x 1 (for De-bug) Build-in Microphone x 2 Build-in Speaker x 1		
All-in-One Connector	7-36V Power Input, IGN Power on Signal Input (H Active, 9-32V) GPIO x 4: 1 OUT/ 3 IN (polling mode) OBD II/ J1939: Smart Cable Accessory Support Multi CAN Channels Vehicle Signal: Speed Pulse, Reverse Signal Input RS232: TX/ RX/ CTS/ RTS		
Buttons	Emergency Recording Button		
LED Indicators	Recording, WiFi and LTE		
Battery	10F SuperCAP (Approx. 18s Backup Power Supply for Video Clip Storaging)		
Power Consumption	Full Run Mode: 5.1W (12V/ 425 mA)	Full Run Mode: 5.75W (12V/ 480 mA)	Parking Mode: 90mW (12V/ 7.5mA)
Boot Up Time	Cold Boot : 25s; Resume Recording From Parking Mode: 2s		
Parking Mode	With Impact Detection		
Environmental Index	IP30 -20 to +60C (-40 to +140F) Operating Temperature -20 to +70C (-40 to +158F) Operating Temperature (Under Certain Conditions) -30° to +85°C (-22° to +185°F) Storage Temperature		
Certification	CE,CB, FCC/IC, UKCA, RCM, BQB, PTCRB, AT&T, Verizon, T-Mobile, WEEE, ROHS		
Warranty	12 Months (Extended Warranty Available)		
Weight	300g (10.58oz)	340g (12oz)	
Dimension	124 x 88.6 x 72mm (4.88 x 3.48 x 2.8")	124 x 88.6 x 101mm (4.88 x 3.48 x 3.97")	

### Box contents

- Fleet connected camera
- Quick start guide
- Windshield mounting kit
- Main cable (Power)
- Hex Tool Kit
- Tamper Proof Cover