

15M 4394RT **SCISSOR LIFT**



Experience | Safety | Innovation

Performance

Platform Height-Elevated

4394RT 13.11 m

Platform Capacity

4394RT 680 kg

Capacity on Platform Extension

Capacity with Dual Extensions

567 kg

Lift/Lower Time

4394RT 40/43 seconds

227 kg

Maximum Drive Height

4394RT Full Height

Weight with Dual Extensions

4394RT 7,150 kg

Drive Speed - Lowered

4394RT 6.4 km/h

Drive Speed - Raised

4394RT 0.6 km/h

Gradeability

4394RT 45%

Turning Radius (Inside)

4394RT 2.71 m

Turning Radius (Outside)

4394RT 5.93 m



Standard Specifications

Engine

Make and Model Diesel

> 4394RT Deutz D2011L03 36.4 kW

Fuel Tank Capacity

4394RT 113.56 L

Tyres

Standard Foam-Filled Non-Marking

Brakes

• 4 Wheel Spring Applied

Hydraulic Reservoir

 Capacity 121.42 L

Standard Features

- 4-Wheel Drive
- Automatic Transmission
- · Three-Speed Drive Select
- Proportional Drive/Lift Up/Lift Down
- · Oscillating Axle
- Adjustable, Removable Platform Control Station
- Fold-Down Handrails

- Horn
- Tilt Light and Alarm
- Leveling Jacks¹
- Dual Extension Deck³
- Self-Closing Entry Gates¹
- Flashing Amber Beacon

Accessories & Options

- Platform Worklights
- Pipe Rack Accessory
- AC Outlet to Platform incl ELCB
- · Wheel Chocks
- Squawker / White Noise Motion Alarm
- 5.5kVA Generator 530LRT only

^{*} Certain options or country standards will increase weight.




15M 4394RT SCISSOR LIFT



Dimensions

All dimensions are approximate.

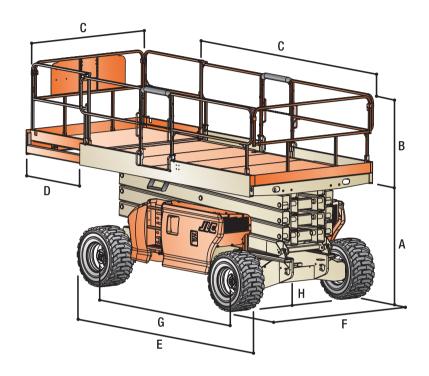

Platform Height — Elevated		D. Platform Extension	1.22 m
4394RT	13.11 m	E. Overall Length	
A. Platform Height – Lowered		4394RT	3.86 m
	1.79 m	F. Overall Width	
		4394RT	2.39 m
B. Platform Railing Height		G. Wheelbase	
4394RT		4394RT	2.95 m
C. Platform Size		H. Ground Clearance	30 cm
4394RT	2.18 x 3.81 m	11. Ground Clearance	JU CIII