
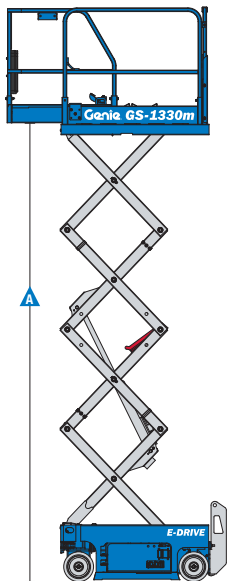



6M GS1330m

SCISSOR LIFT



Models	GS™-1330m	
Measurements	Metric	US
Working height maximum*	5.9 m	18 ft 10 in
A Platform height maximum	3.9 m	12 ft 10 in
B Platform height - stowed	0.90 m	2 ft 11 in
C Platform length - outside	1.26 m	4 ft 2 in
extended	1.72 m	5 ft 8 in
Slide-out platform extension deck	0.46 m	1.5 ft
A Platform width - outside	0.67 m	26.5 in
Guardrail height	1.10 m	3 ft 7 in
Toeboard height	0.15 m	6 in
E Height - stowed: fixed rails	2.02 m	6 ft 7.5 in
folding rails	2.02 m	6 ft 7.5 in
rails lowered	1.68 m	5 ft 6 in
F Length - stowed	1.41 m	4 ft 8 in
- stowed extended	1.87 m	6 ft 2 in
G Width	0.78 m	30.5 in
H Wheelbase	0.98 m	3 ft 3 in
A Ground clearance - centre	6 cm	2.4 in
- with pothole guards deployed	2 cm	0.63 in

Productivity

Max platform occupancy (indoor/outdoor)**	2/-	2/-
Lift capacity	227 kg	500 lb
Lift capacity - extension deck	91 kg	200 lb
Drive height	Full height	
Drive speed - stowed	4.0 km/h	2.5 mph
Drive speed - raised	0.8 km/h	0.5 mph
Gradeability - stowed***	25%/14°	25%/14°
Turning radius - inside	40 cm	15.7 in
Turning radius - outside	1.55 m	5 ft 1 in
Raise/lower speed	20 / 24 sec	
Controls	Proportional	
Drive	dual rear wheel, electric	
Brakes	dual rear wheel, electric	
Tyres solid non-marking	25.4 x 7.62 cm	10 x 3 in

Power

Power source	24 V DC (two 12 V 85 Ah batteries)	
Hydraulic system capacity	1.5 gal	5.6 L

Weight****

885 kg 1,950 lb

Standards Compliance EU Directives: 2006/42/EC - Machinery (harmonized standard EN280);
2004/108/EC (EMC); 2006/95/EC (LVD)

* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.

** Indoor use only for the GS-1330m

*** Gradeability applies to driving on slopes, see Operator's Manual for details regarding slope ratings.

**** Weight will vary depending on options and/or country standards.

Features

Standard Features	Easily Configured To Meet Your Needs	Options & Accessories
<p>Measurements</p> <p>GS-1330m</p> <ul style="list-style-type: none"> • 5.9 m (18 ft 10 in) working height • Up to 227 kg (500 lb) lift capacity <p>Productivity</p> <ul style="list-style-type: none"> • Folding rails with half-height swing gate • Dual rear wheel DC electric drive • Smart Link™ control system (joystick, 2 lift speeds & 2 selectable proportional drive speeds, user-friendly diagnostics) • Rear recessed charger receptacle • Platform control with battery charge indicator • On-board diagnostic system • AC power to platform • Lanyard attachment points • Manual platform lowering valve • Emergency stop at both platform and ground controls • Dual rear wheel electric brakes • Electric brake release • Swing-out component trays • Pothole guards • Tilt level sensor with audible alarm • Descent alarm • Motion alarm • Dual flashing LED beacons • Electronic horn • Hour meter <p>Power</p> <ul style="list-style-type: none"> • 24 V DC battery pack • Universal 20 amp smart charger 	<p>Platform</p> <ul style="list-style-type: none"> • 1.26 m x 0.67 m (50 x 26.5 in) steel platform • 0.46 m (1.5 ft) extension deck <p>Power</p> <ul style="list-style-type: none"> • 24 V DC (two 12V 85 Ah batteries) <p>Tyres</p> <ul style="list-style-type: none"> • Solid non-marking 	<p>Productivity Options</p> <ul style="list-style-type: none"> • Fixed rails with saloon doors • Air line to platform⁽¹⁾ • Power to platform: plug, socket, with optional Residual-current Circuit Breaker with Overcurrent protection • Biodegradable hydraulic oil • Automotive horn <p>Power Options</p> <ul style="list-style-type: none"> • Power inverter⁽¹⁾ (800W, 120V/60Hz, 240V/50Hz or 110V/50Hz) • AGM maintenance-free batteries

⁽¹⁾ Factory-fit option only

