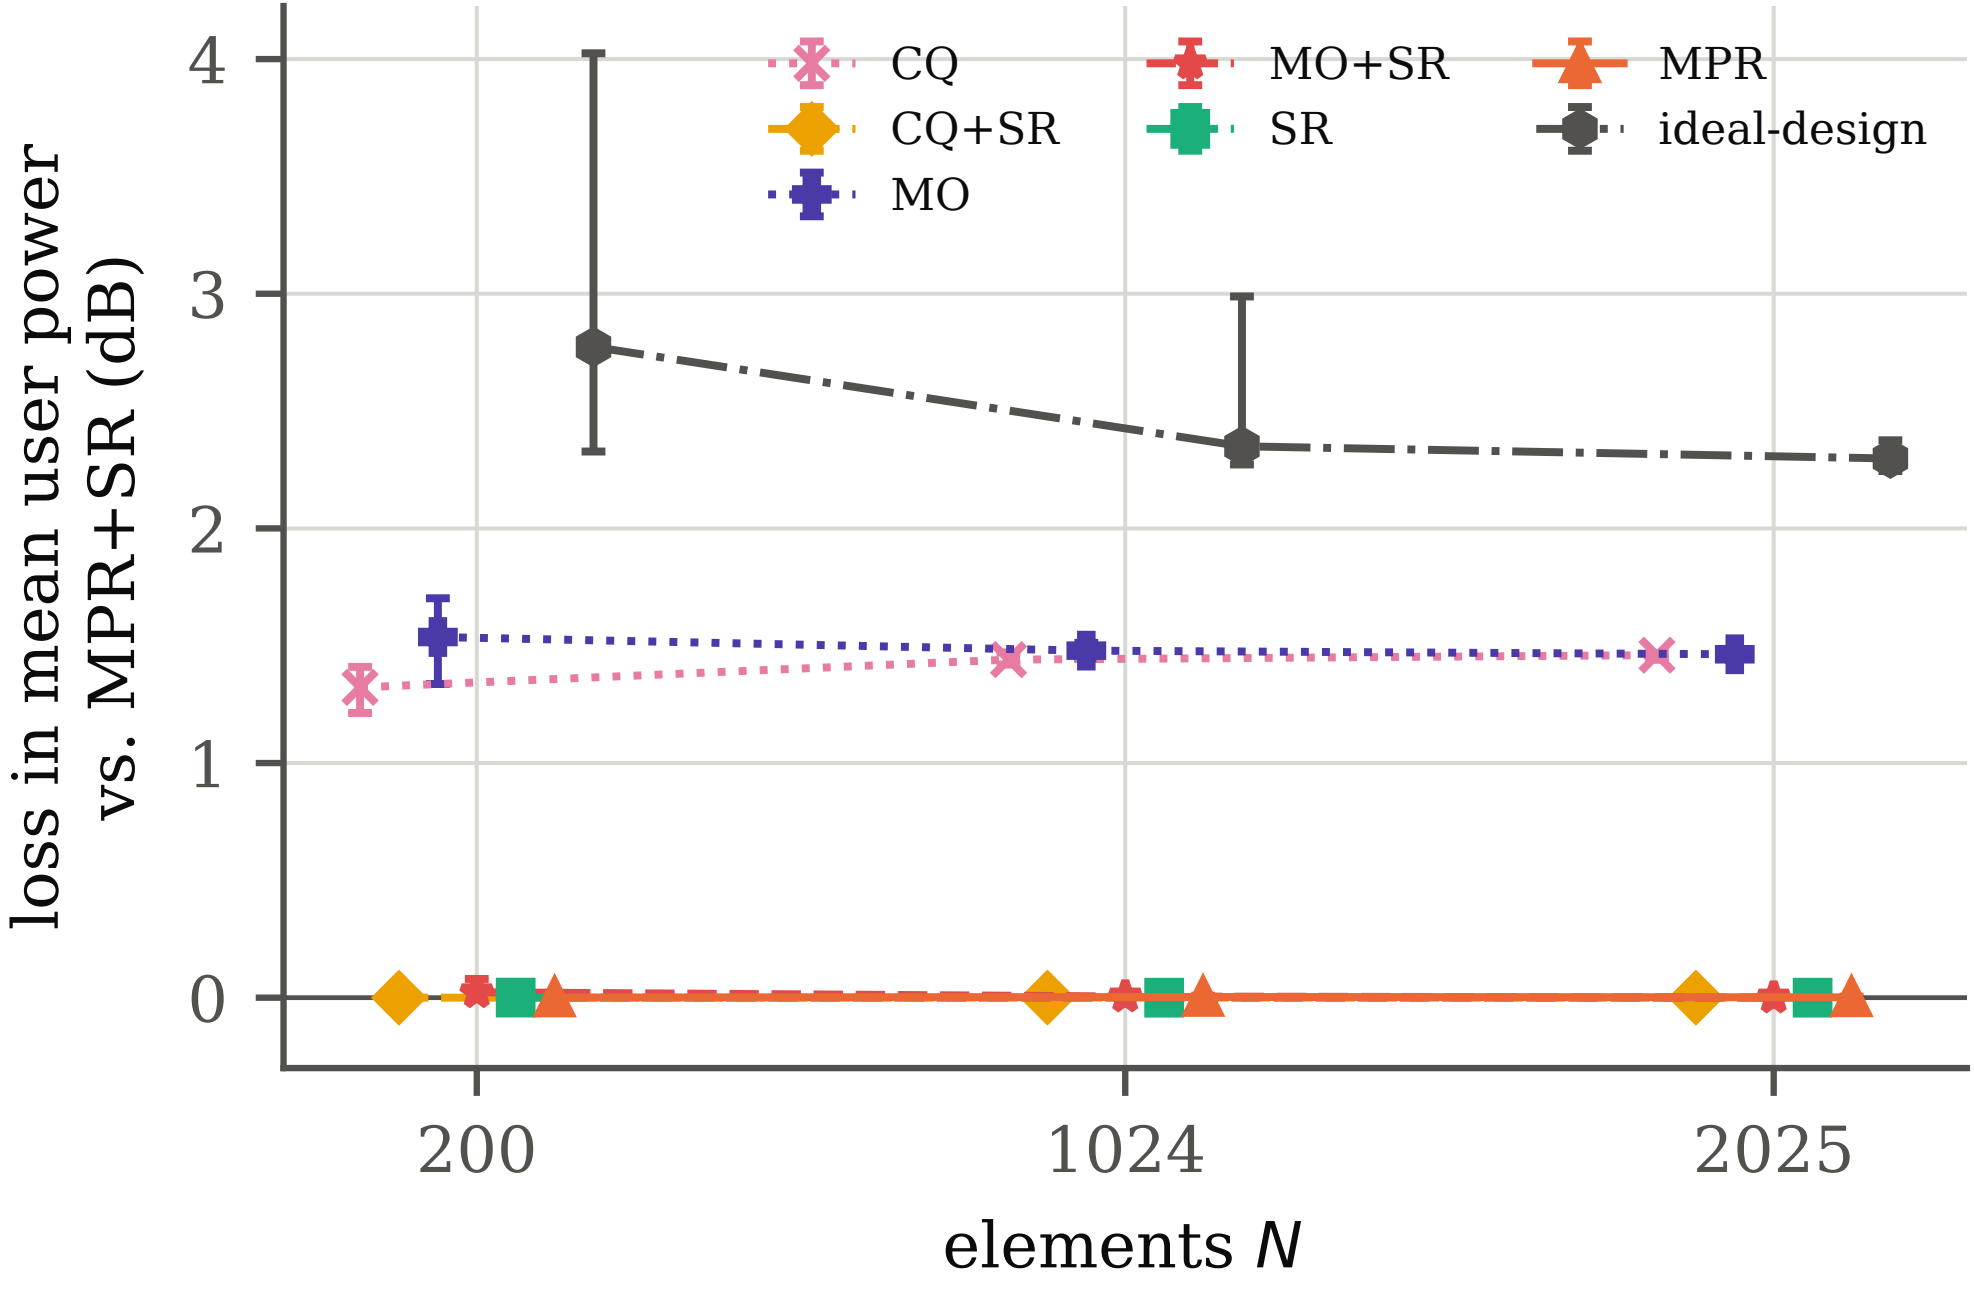
CQ
CQ+SR
MO
MO+SR
SR
MPR
ideal-design
loss in mean user power
vs. MPR+SR (dB)
4
3
2
1
0
200
1024
2025
elements N