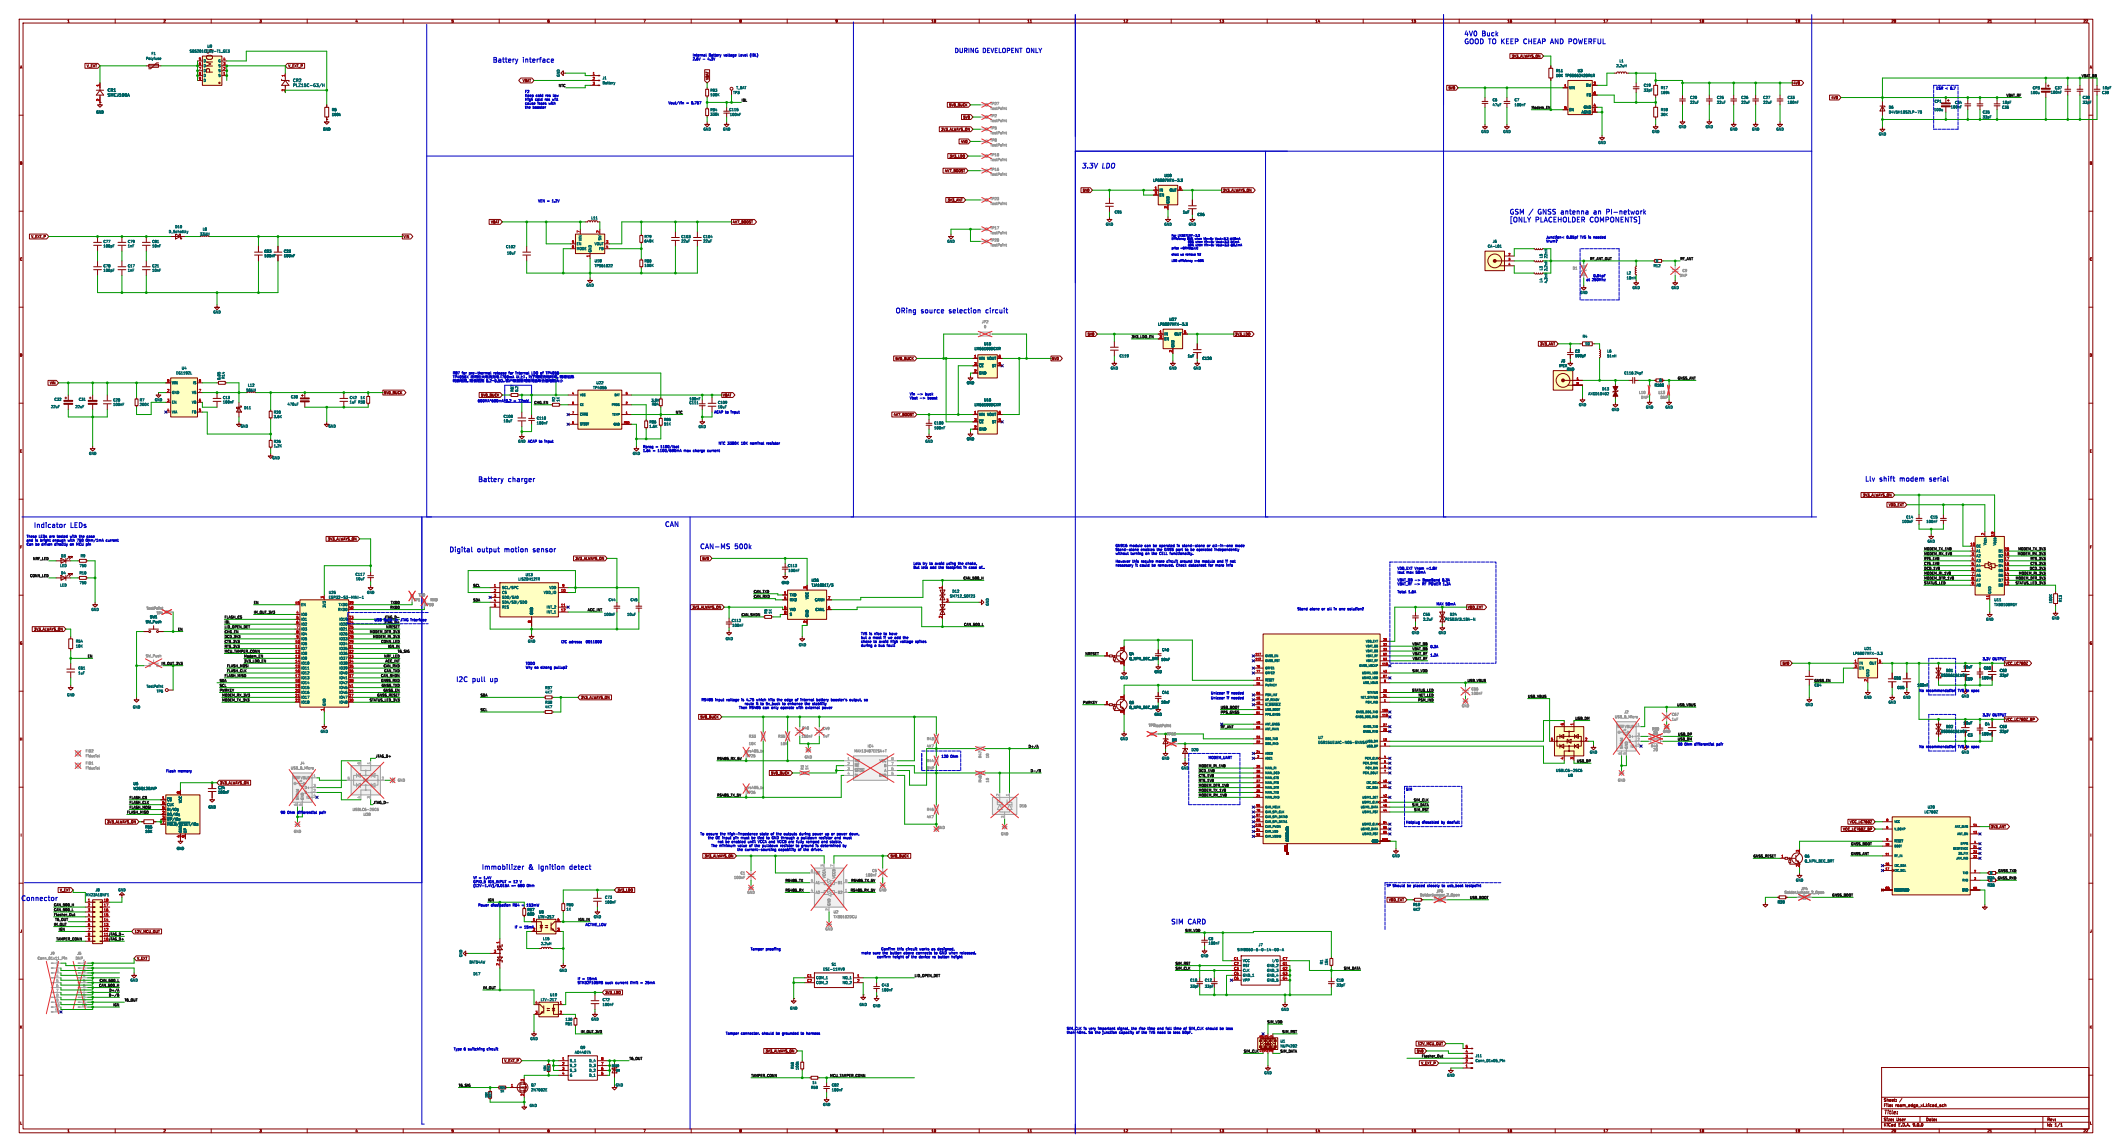

Battery Interface
DURING DEVELOPENT ONLY
4V0 Buck
GOOD TO KEEP CHEAP AND POWERFUL
3.3V LDO
GSM / GNSS antenna an PI-network
[ONLY PLACEHOLDER COMPONENTS]
ORing source selection circuit
Battery charger
Indicator LEDs
Digital output motion sensor
I2C pull up
CAN
CAN-HS 500k
Immobilizer & ignition detect
Liv shift modem serial
SIM CARD
Connector