Lecture #20

Pipelining
Part I: Introduction

NUS
National University
of Singapore

School of
Computing

Lecture #20: Pipelining I

1. Introduction
2. MIPS Pipeline Stages
3. Pipeline Datapath
4. Pipeline Control
5. Pipeline Performance

1. Introduction: Inspiration

Assembly Line

Simpler station tasks → more cars per hour.
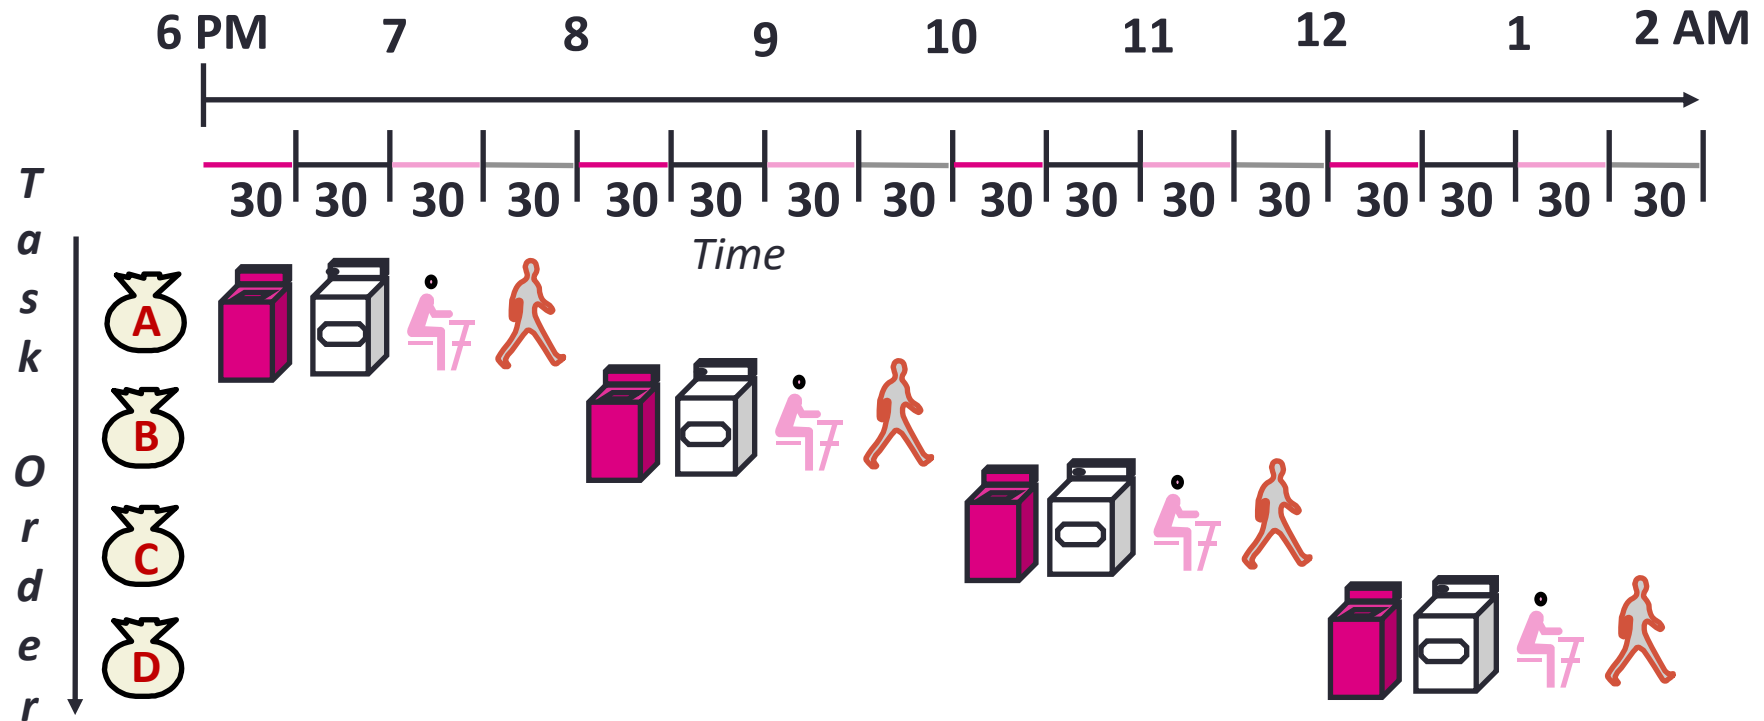**Simple tasks take less time, clock is faster.**

1. Introduction: Laundry

- **A**nn, **B**rian, **C**athy, **D**ave each have one load of clothes to wash, dry, fold and stash

- **Washer** takes 30 minutes

- **Dryer** takes 30 minutes

- "**Folder**" takes 30 minutes

- "**Stasher**" takes 30 minutes to put clothes into drawers

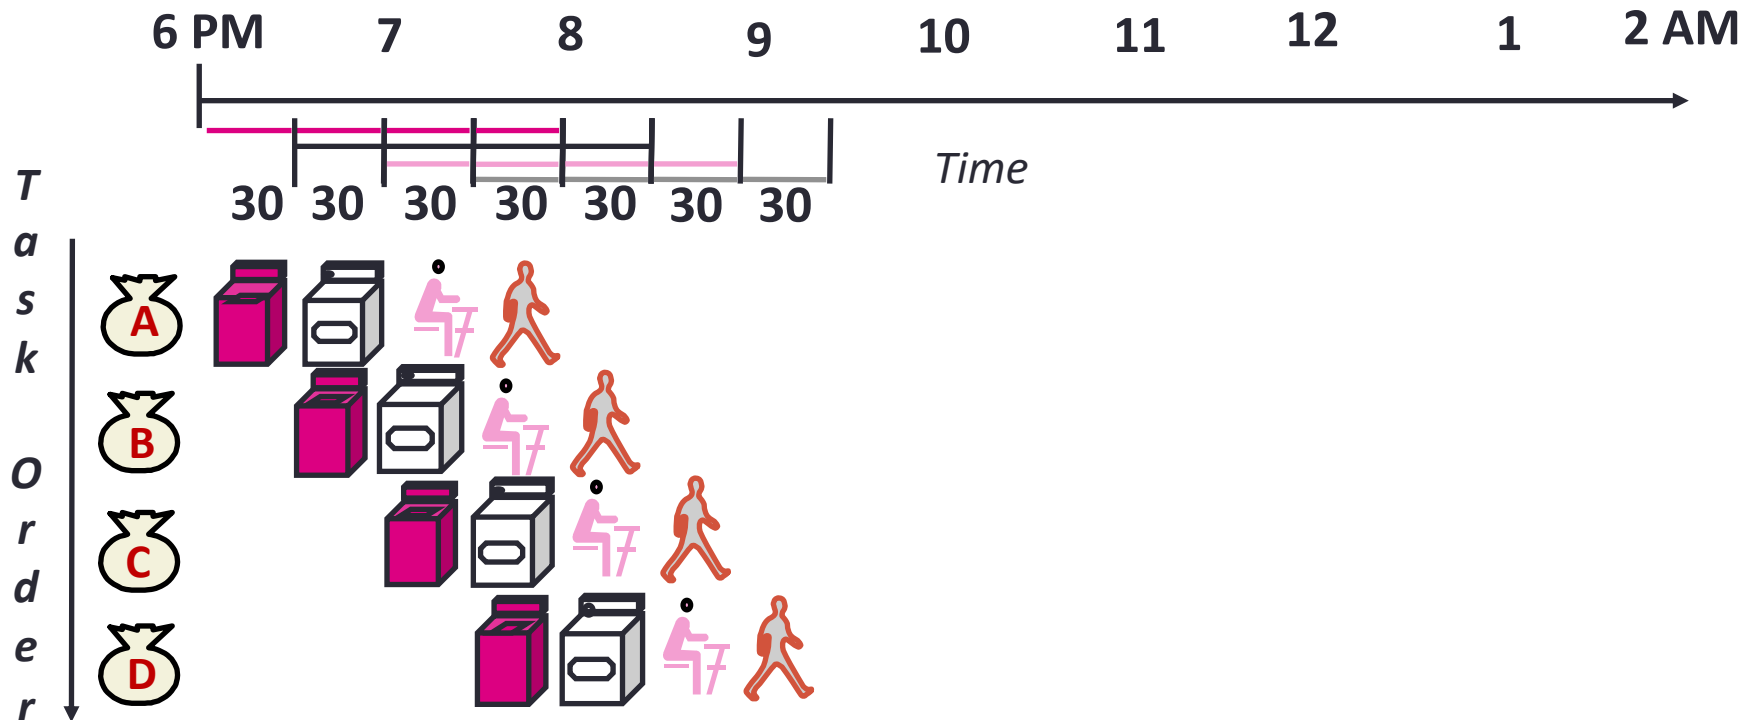# 1. Introduction: Sequential Laundry


- Sequential laundry takes <u>8 hours</u> for 4 loads
- Steady state: 1 load every 2 hours
- If they learned pipelining, how long would laundry take?

1. Introduction: Pipelined Laundry

- Pipelined laundry takes <u>3.5 hours</u> for 4 loads!
- Steady state: 1 load every 30 minutes
- Potential speedup = 2 hr/30 min = 4 (no. of stages)
- Time to fill pipeline takes 2 hours → speedup ↓

1. Introduction: What If: Slow Dryer
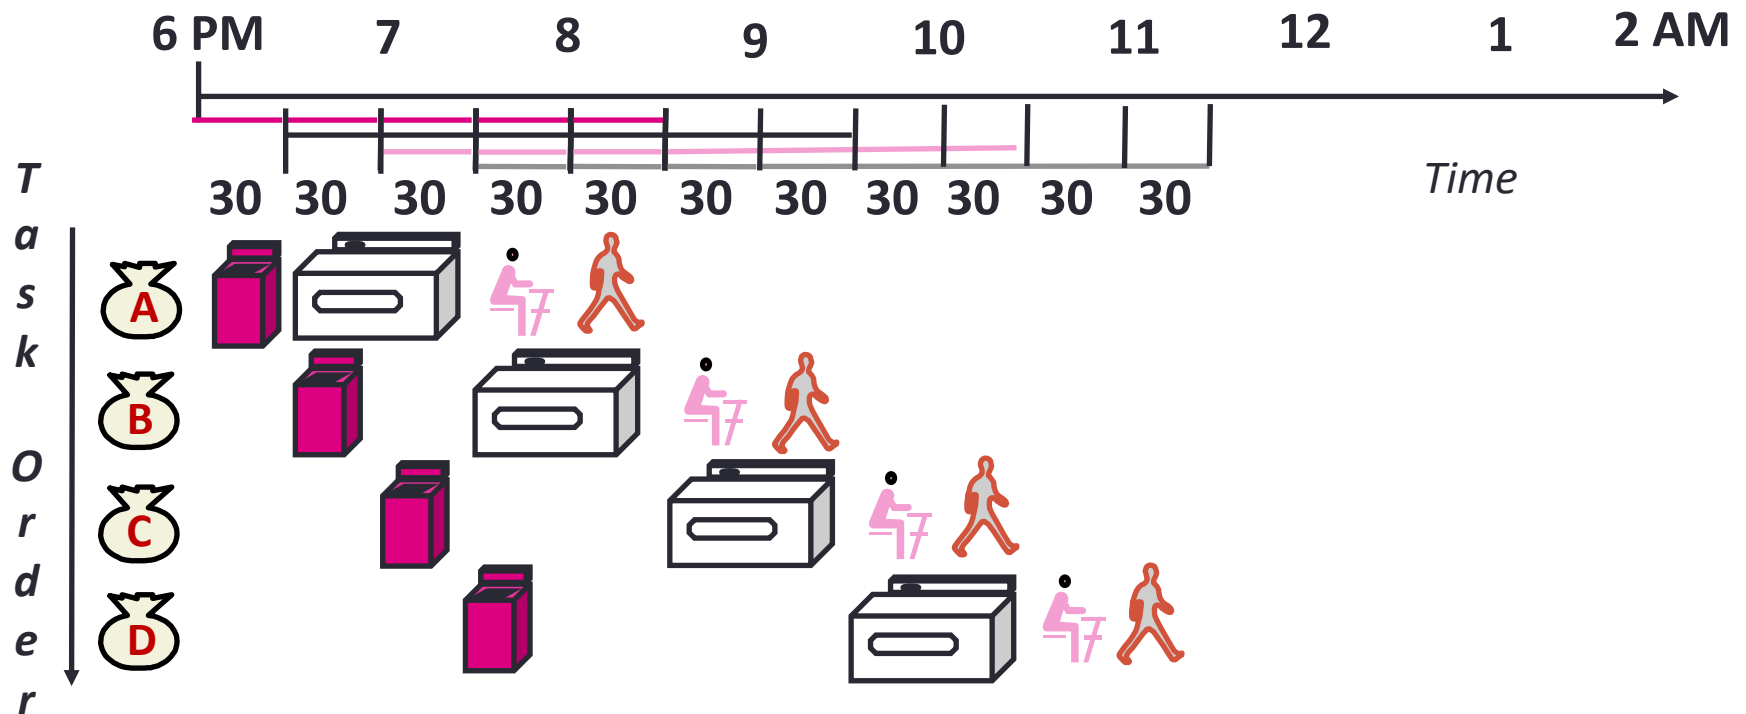
- **Pipelined laundry now takes 5.5 hours!**
- Steady state: One load every 1 hour (dryer speed)
- **Pipeline rate is limited by the slowest stage**

1. Introduction: What If: Dependency
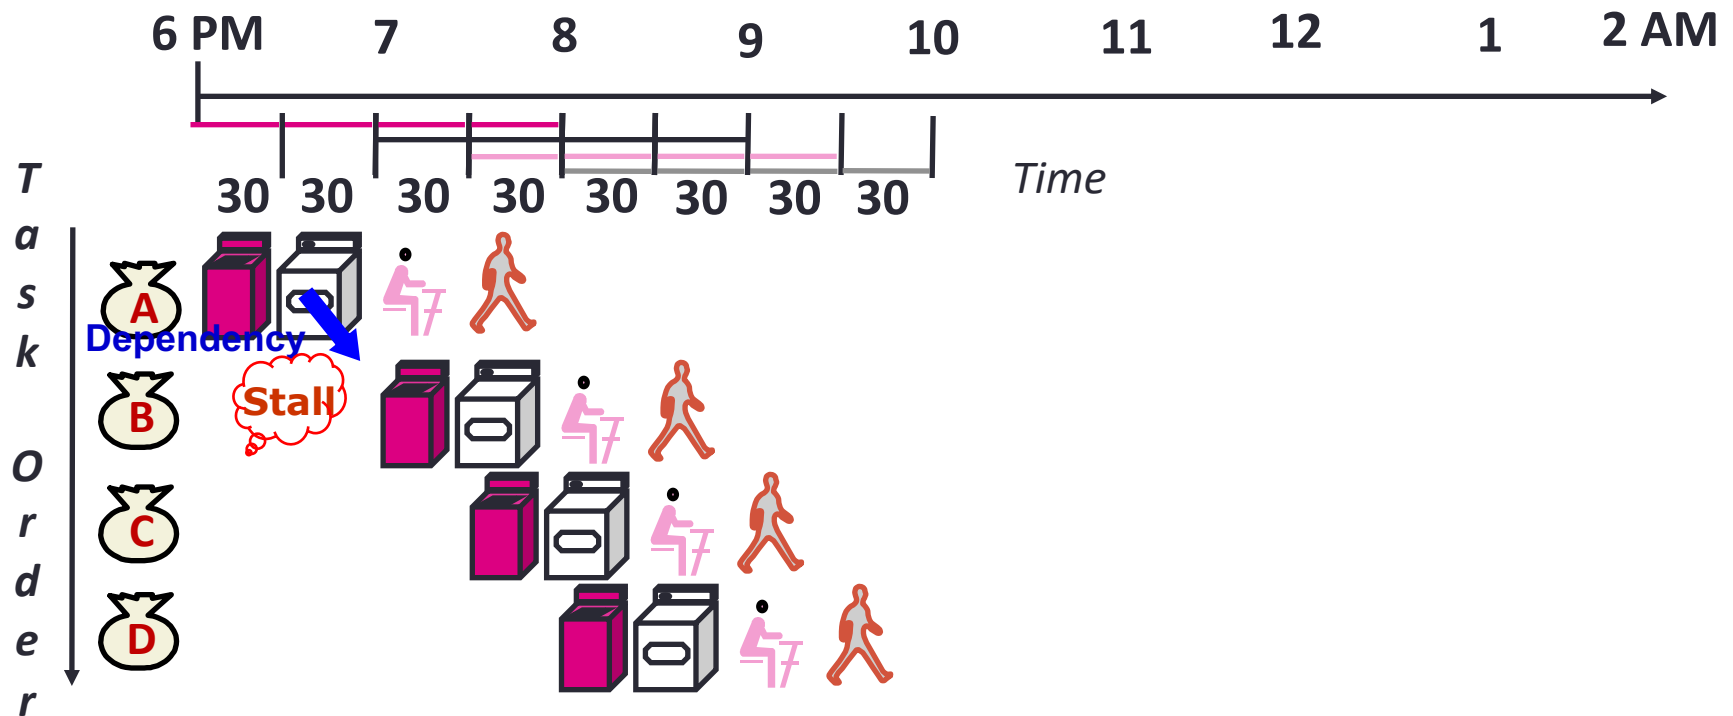
- Brian is using the laundry for the first time; he wants to see the outcome of one wash + dry cycle first before putting in his clothes
- Pipelined laundry now takes 4 hours

# 1. Introduction: Pipelining Lessons

- Pipelining doesn't help **latency** of single task:
  - It helps the **throughput** of entire workload

- **Multiple** tasks operating simultaneously using different resources

- Possible delays:
  - Pipeline rate limited by **slowest** pipeline stage
  - Stall for **dependencies**

2. MIPS Pipeline Stages (1/2)

- **Five** Execution Stages
  - `IF`: Instruction Fetch
  - `ID`: Instruction Decode and Register Read
  - `EX`: Execute an operation or calculate an address
  - `MEM`: Access an operand in data memory
  - `WB`: Write back the result into a register

- **Idea:**

  - **Each execution stage takes 1 clock cycle**

  - General flow of data is from one stage to the next

- **Exceptions:**

  - Update of PC and write back of register file – more about this later…

2. MIPS Pipeline Stages (2/2)
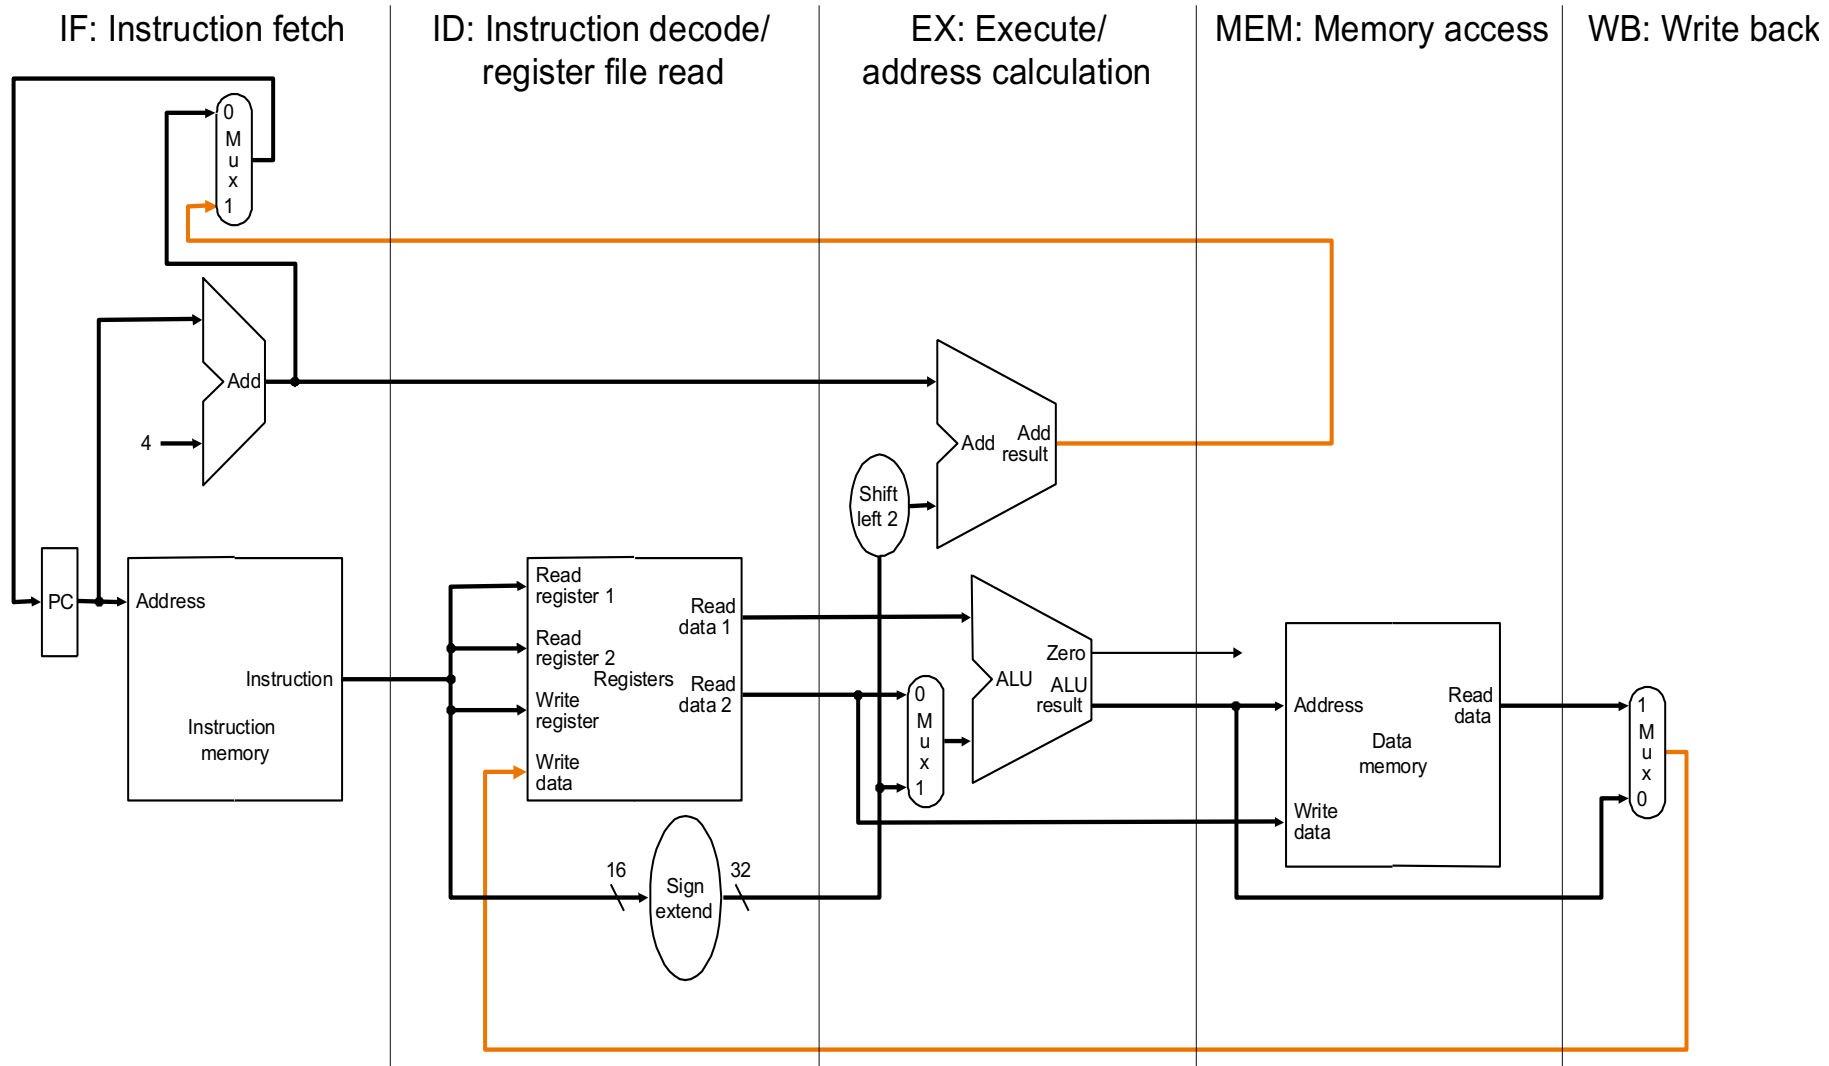
2. Pipelined Execution: Illustration

Time

IF	ID	EX	MEM	WB

Program Flow
(Instructions)
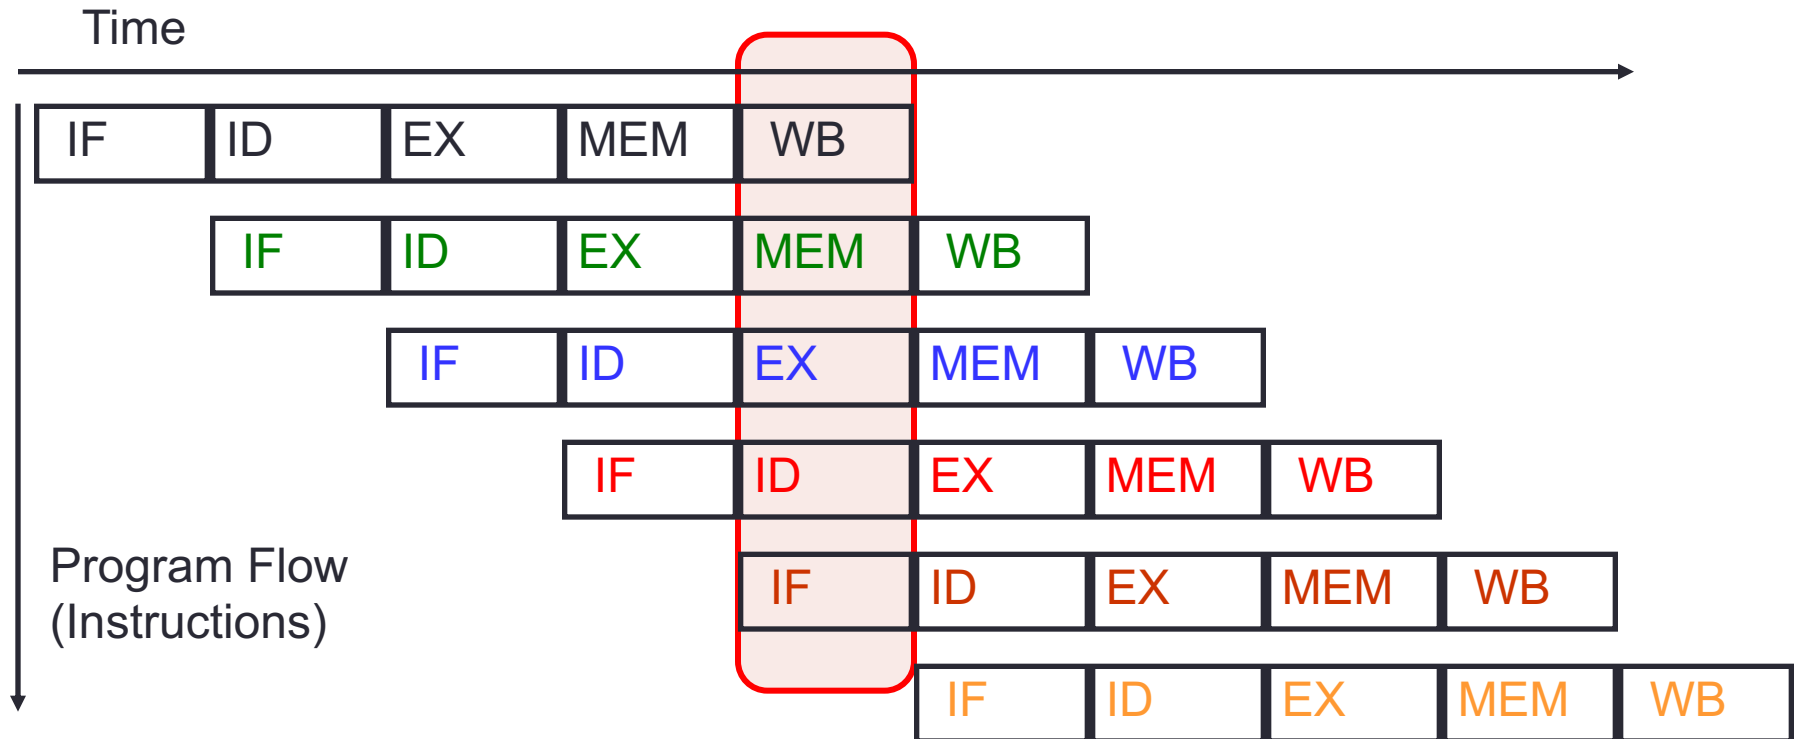
Several instructions
are in the pipeline
simultaneously!

3. MIPS Pipeline: Datapath (1/3)

- ## Single-cycle implementation:
 - Update all state elements (`PC`, register file, data memory) at the end of a clock cycle

- ## Pipelined implementation:
  - One cycle per pipeline stage
  - Data required for each stage needs to be stored separately (why?)

3. MIPS Pipeline: Datapath (2/3)

- Data used by **subsequent instructions:**
  - Store in programmer-visible state elements: `PC`, register file and memory

- Data used by **same instruction** in later pipeline stages:
  - Additional registers in datapath called **pipeline registers**
  - `IF/ID:` register between `IF` and `ID`
  - `ID/EX:` register between `ID` and `EX`
  - `EX/MEM:` register between `EX` and `MEM`
  - `MEM/WB:` register between `MEM` and `WB`

- Why no register at the end of `WB` stage?

3. MIPS Pipeline: Datapath (3/3)

Coloured rectangles are pipeline registers
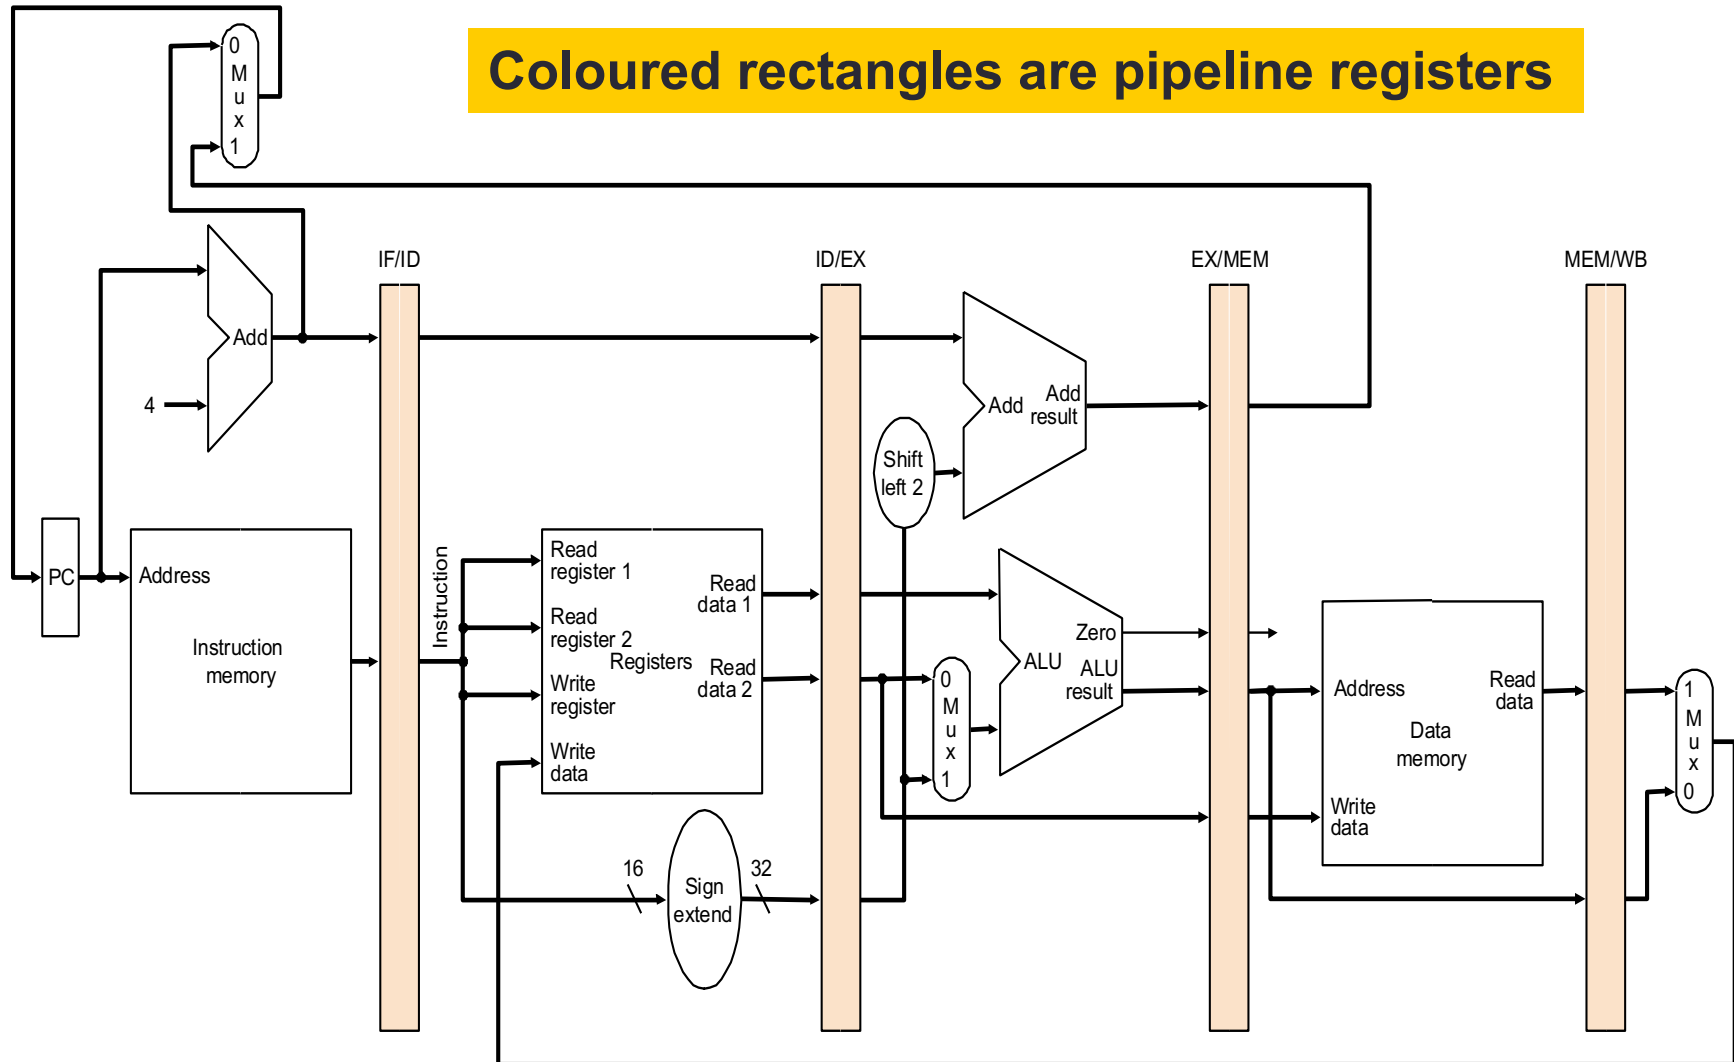
3. Pipeline Datapath: **IF** Stage
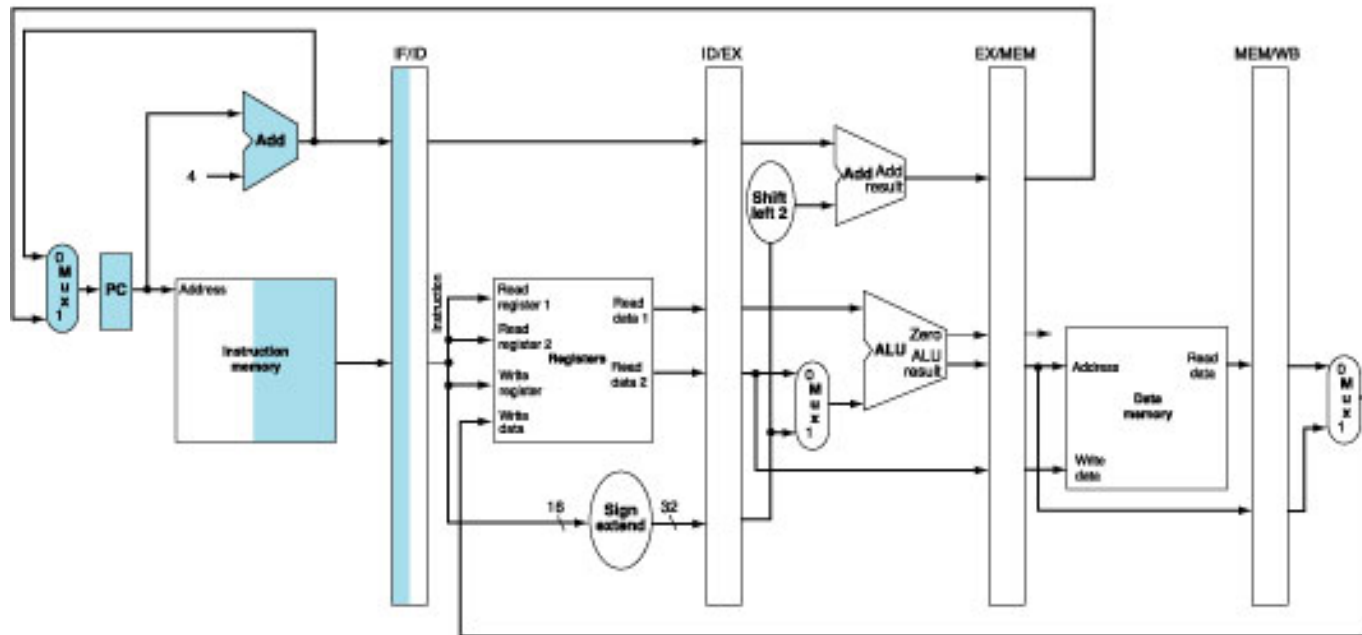
- At the end of a cycle, **IF/ID** receives (stores):
  - Instruction read from InstructionMemory[PC]
  - PC + 4
- PC + 4
  - Also connected to one of the MUX's inputs (another coming later)

3. Pipeline Datapath: **ID Stage**
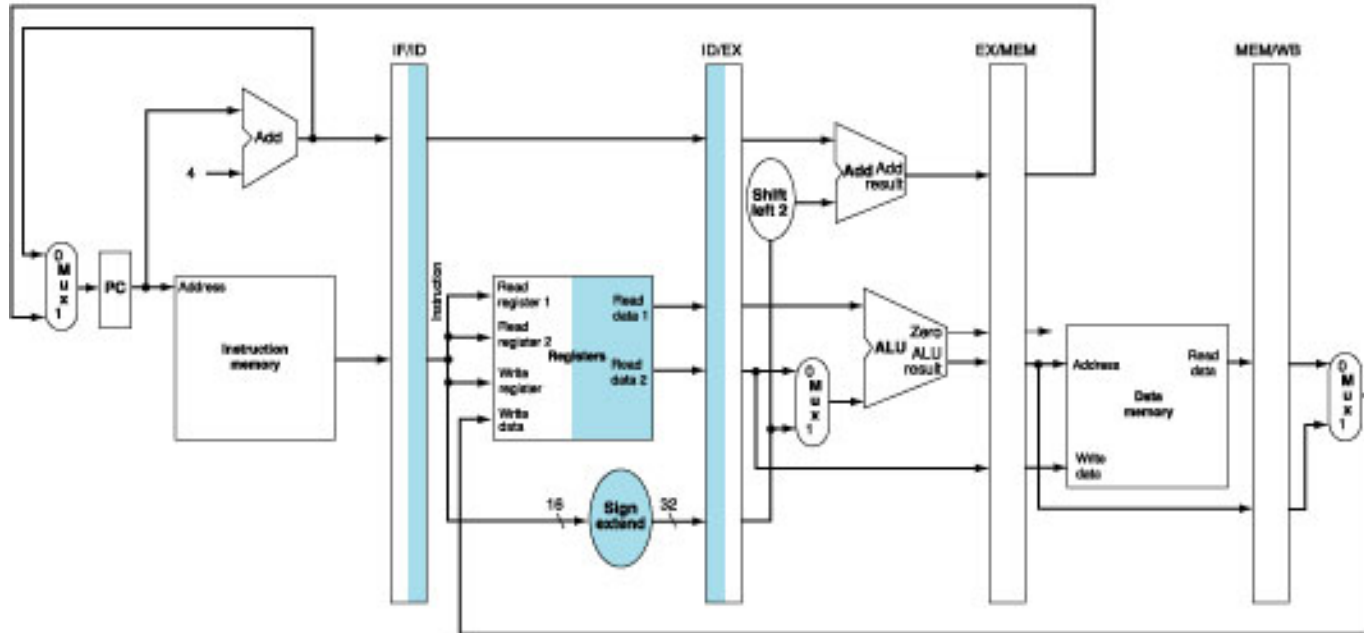
At the beginning of a cycle **IF/ID** register supplies:	At the end of a cycle **ID/EX** receives:
❖ Register numbers for reading two registers ❖ 16-bit offset to be sign-extended to 32-bit	❖ Data values read from register file ❖ 32-bit immediate value ❖ **PC + 4**

3. Pipeline Datapath: **EX Stage**
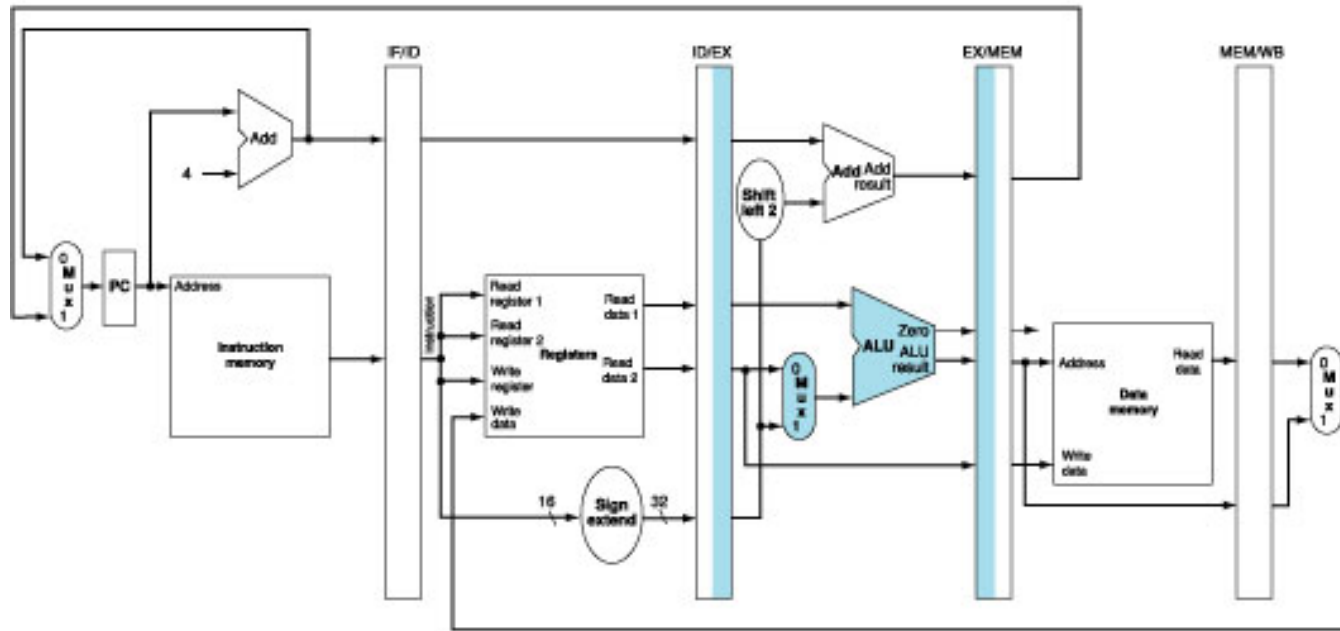
At the beginning of a cycle **ID/EX** register supplies:	At the end of a cycle **EX/MEM** receives:
❖ Data values read from register file ❖ 32-bit immediate value ❖ **PC + 4**	❖ (PC + 4) + (Immediate x 4) ❖ ALU result ❖ **isZero?** signal ❖ Data Read 2 from register file

3. Pipeline Datapath: MEM Stage
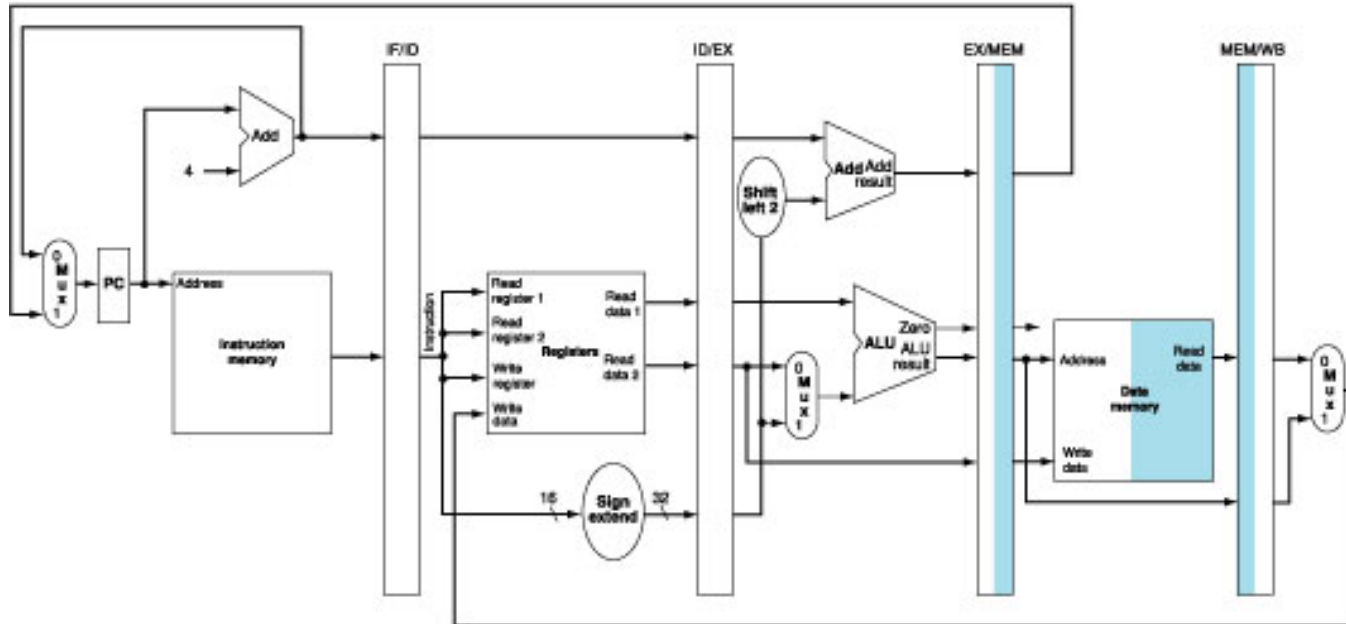
At the beginning of a cycle **EX/MEM** register supplies:	At the end of a cycle **MEM/WB** receives:
❖ (PC + 4) + (Immediate x 4) ❖ ALU result ❖ `isZero?` signal ❖ Data Read 2 from register file	❖ ALU result ❖ Memory read data

3. Pipeline Datapath: WB Stage
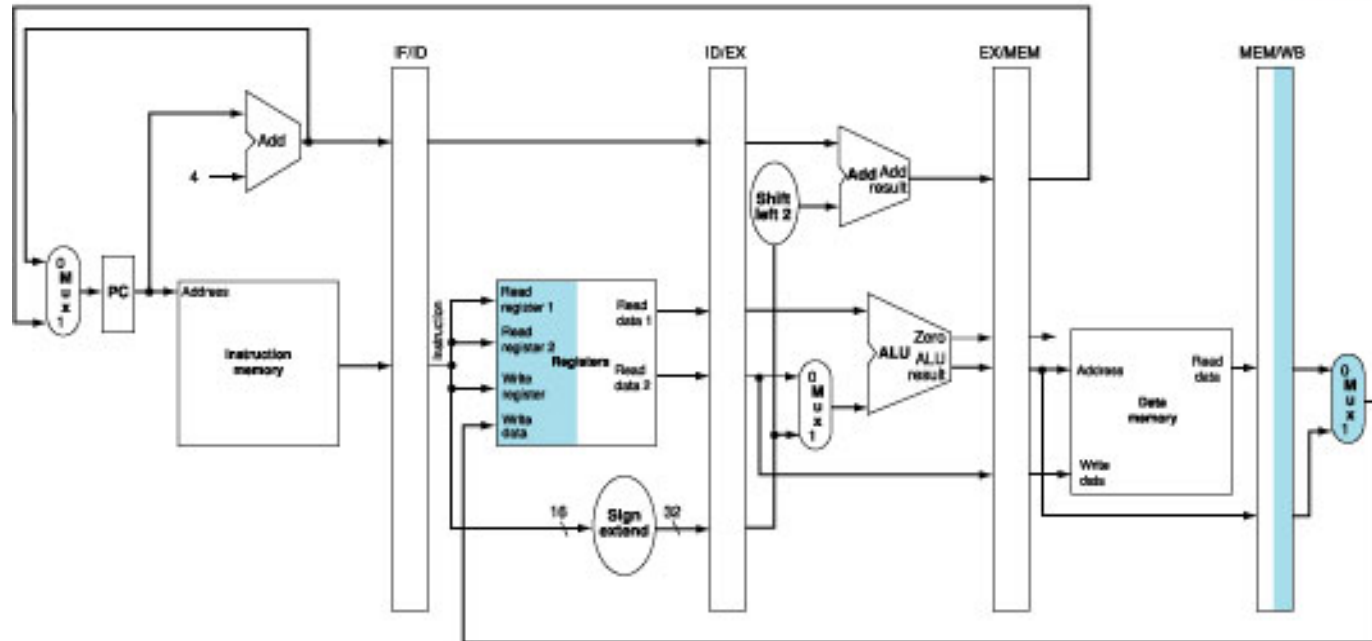
At the beginning of a cycle MEM/WB register supplies:	At the end of a cycle
❖ ALU result ❖ Memory read data	❖ Result is written back to register file (if applicable) ❖ **There is a bug here…….**

3. Corrected Datapath (1/2)

- Observe the "Write register" number
  - Supplied by the **IF/ID** pipeline register
  - ➔ It is NOT the correct write register for the instruction now in **WB** stage!

- **Solution:**
  - Pass "Write register" number from **ID/EX** through **EX/MEM** to **MEM/WB** pipeline register for use in **WB** stage
  - i.e. let the "Write register" number follows the instruction through the pipeline until it is needed in WB stage

3. Corrected Datapath (2/2)

4. Pipeline Control: **Main Idea**
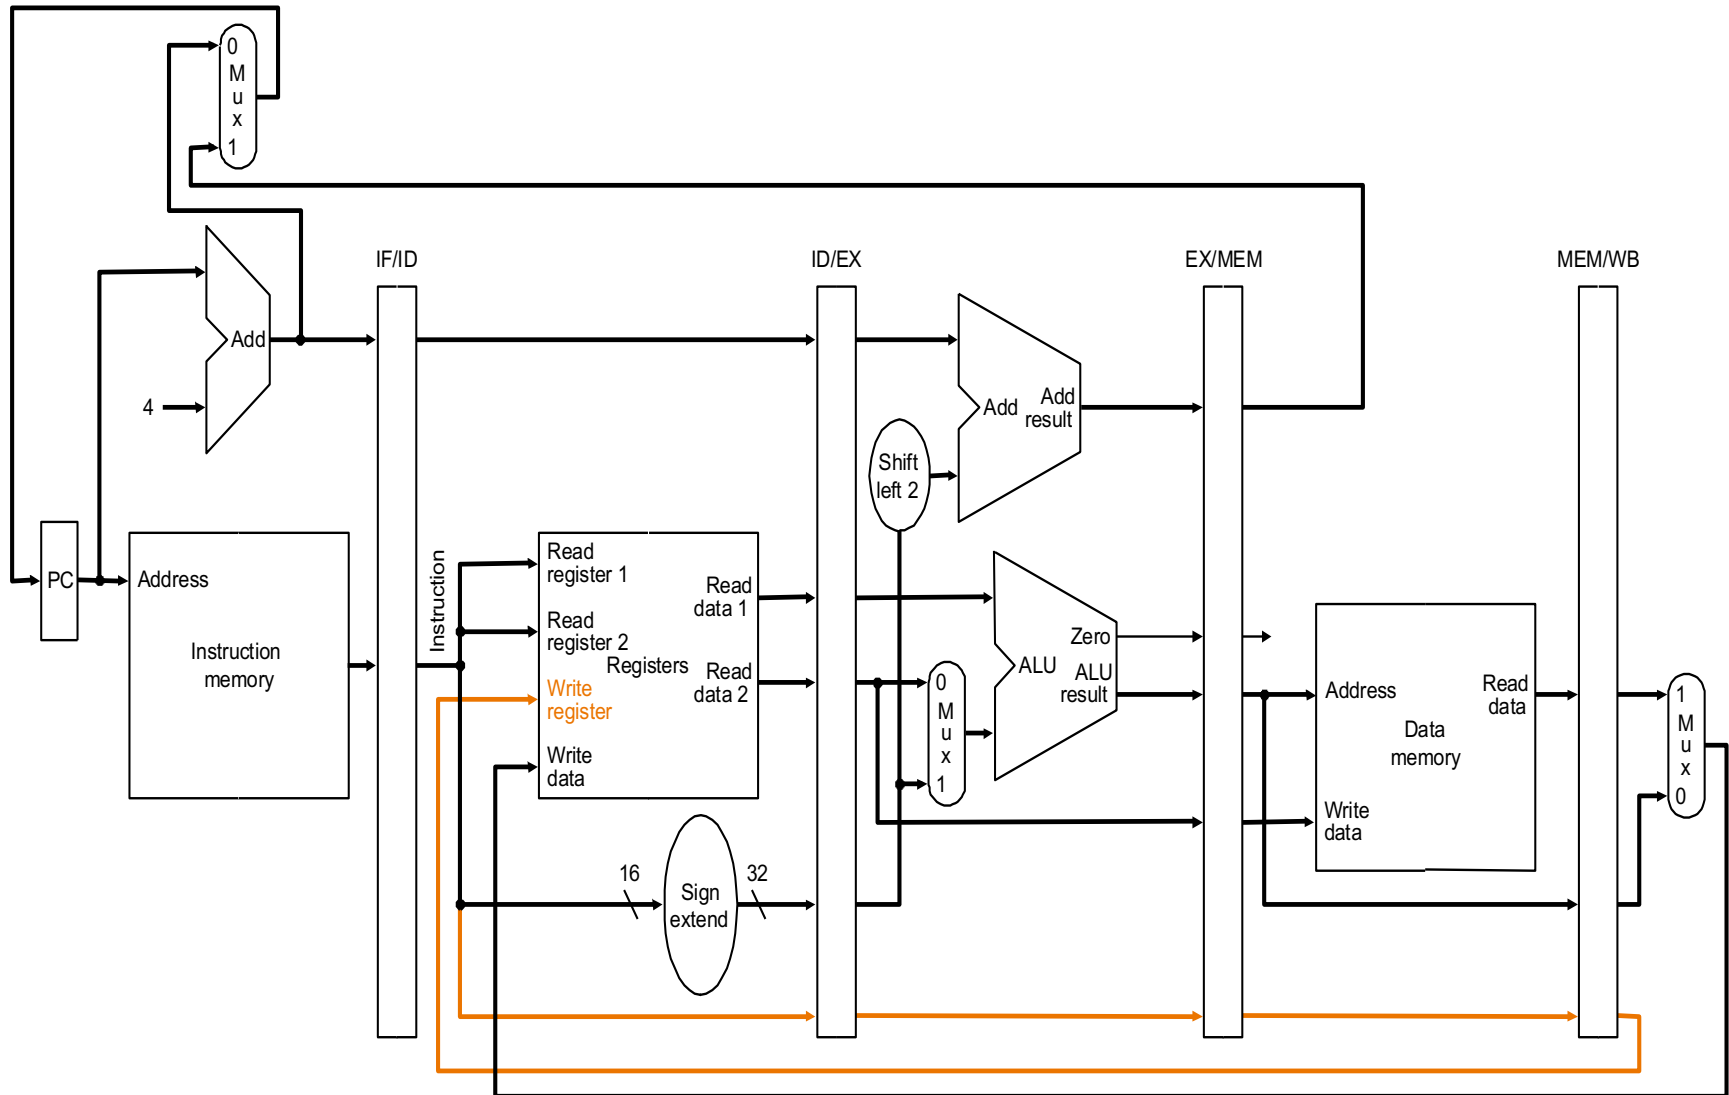
- Same control signals as single-cycle datapath
- **Difference:** Each control signal belongs to a particular pipeline stage
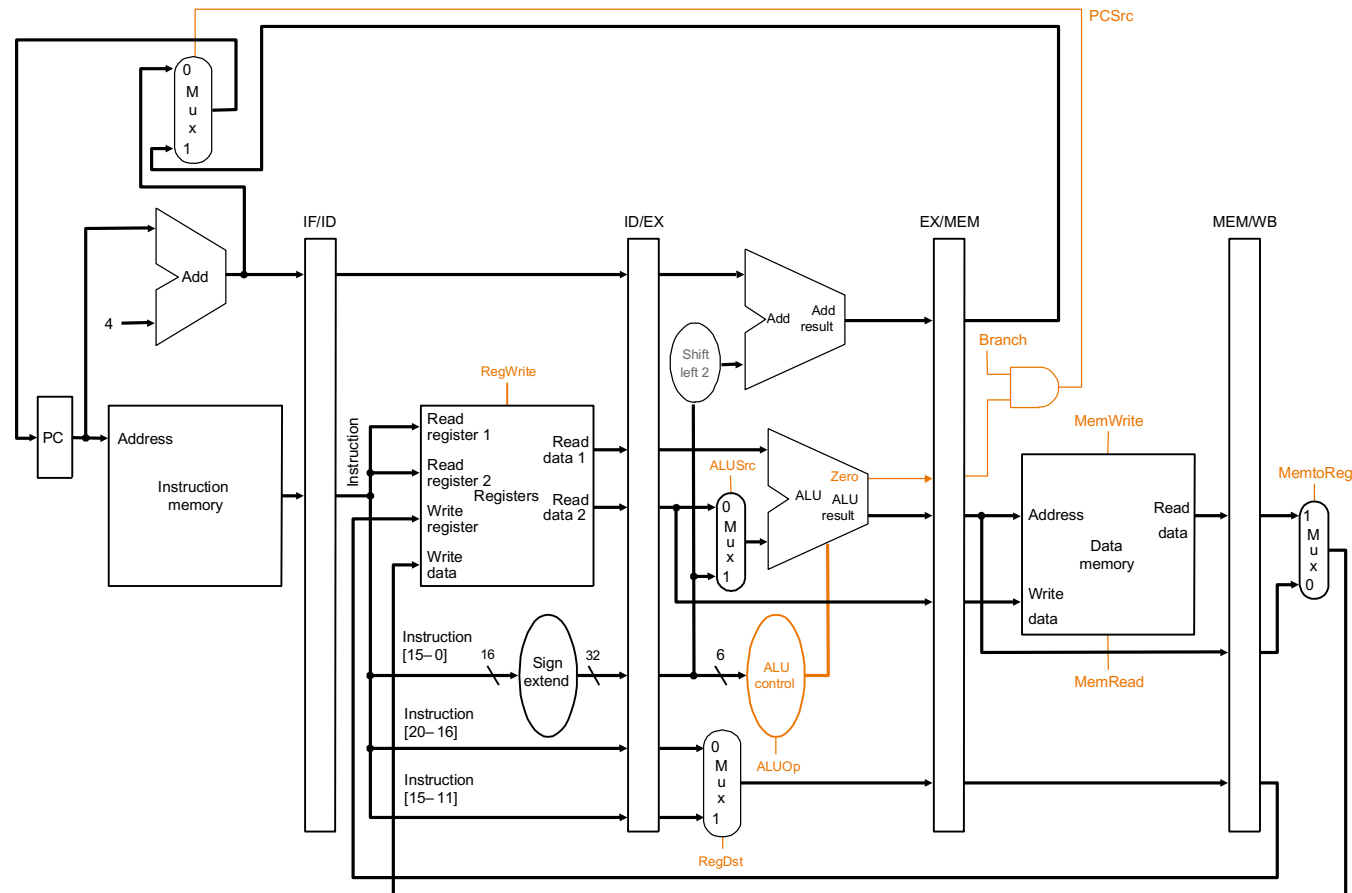
4. Pipeline Control: **Try it!**
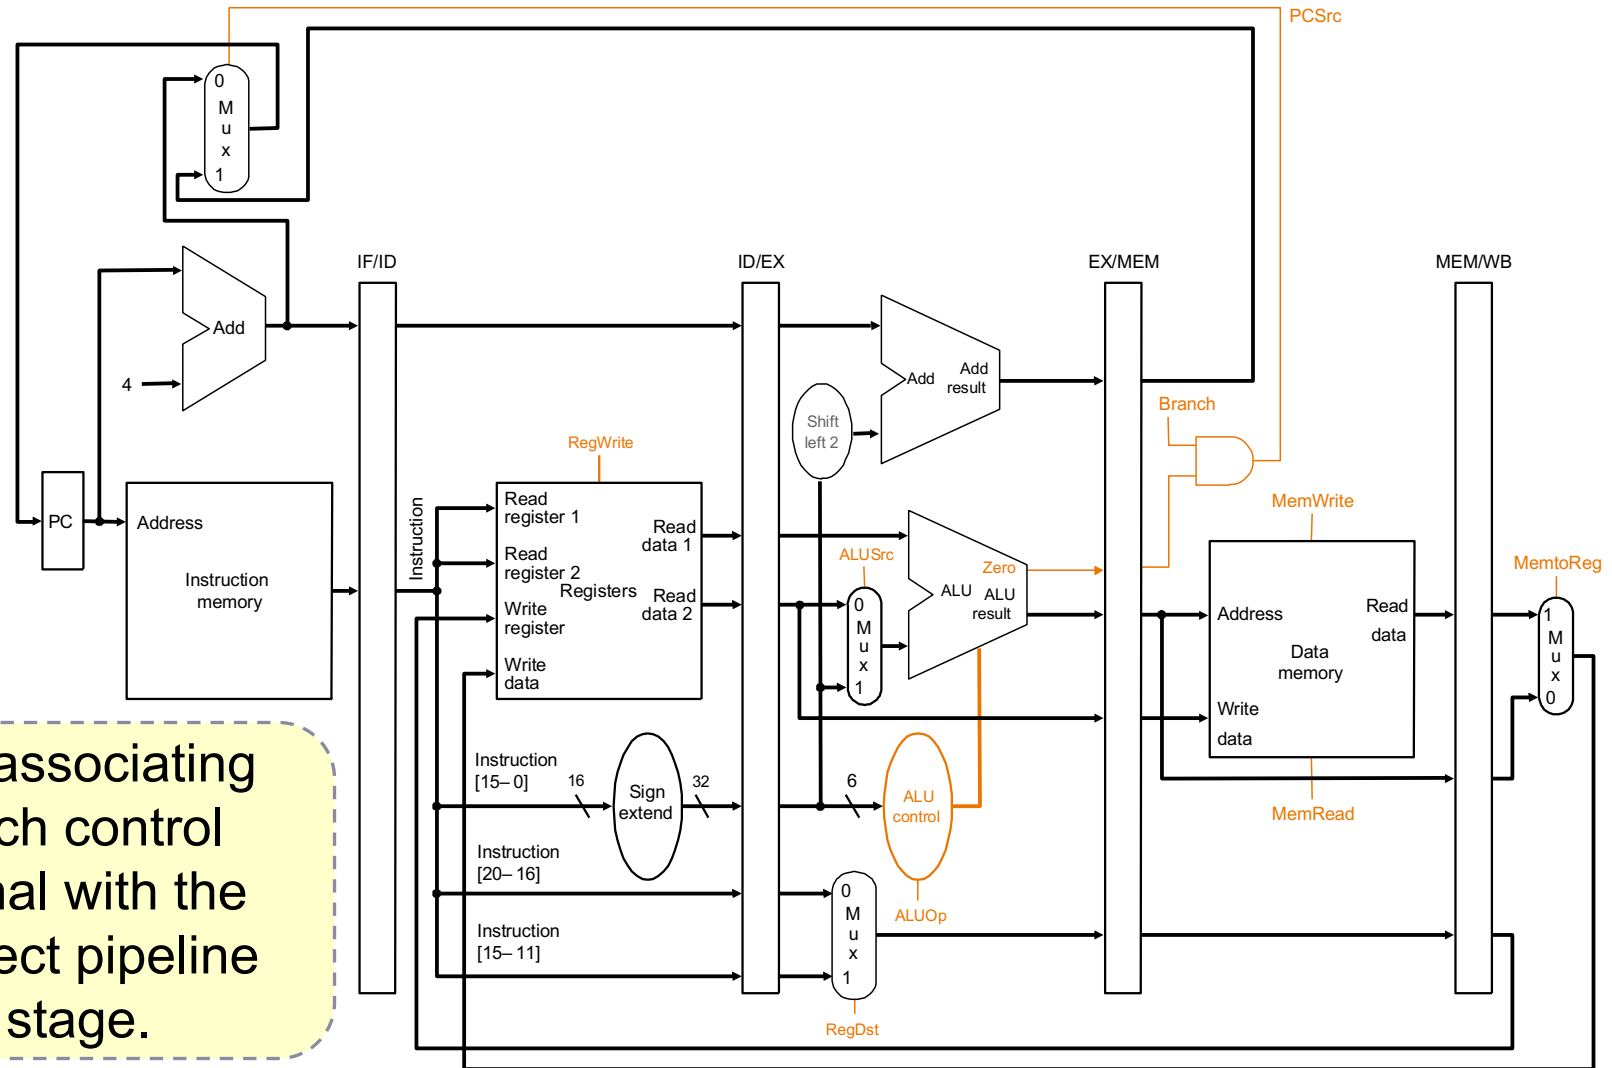
Try associating each control signal with the correct pipeline stage.

4. Pipeline Control: **Grouping**

- Group control signals according to pipeline stage

	RegDst	ALUSrc	MemTo Reg	Reg Write	Mem Read	Mem Write	Branch	ALUop	
								op1	op0
R-type	1	0	0	1	0	0	0	1	0
lw	0	1	1	1	1	0	0	0	0
sw	X	1	X	0	0	1	0	0	0
beq	X	0	X	0	0	0	1	0	1

	EX Stage				MEM Stage			WB Stage	
	RegDst	ALUSrc	ALUop		Mem Read	Mem Write	Branch	MemTo Reg	Reg Write
			op1	op0					
R-type	1	0	1	0	0	0	0	0	1
lw	0	1	0	0	1	0	0	1	1
sw	X	1	0	0	0	1	0	X	0
beq	X	0	0	1	0	0	1	X	0

4. Pipeline Control: **Implementation**
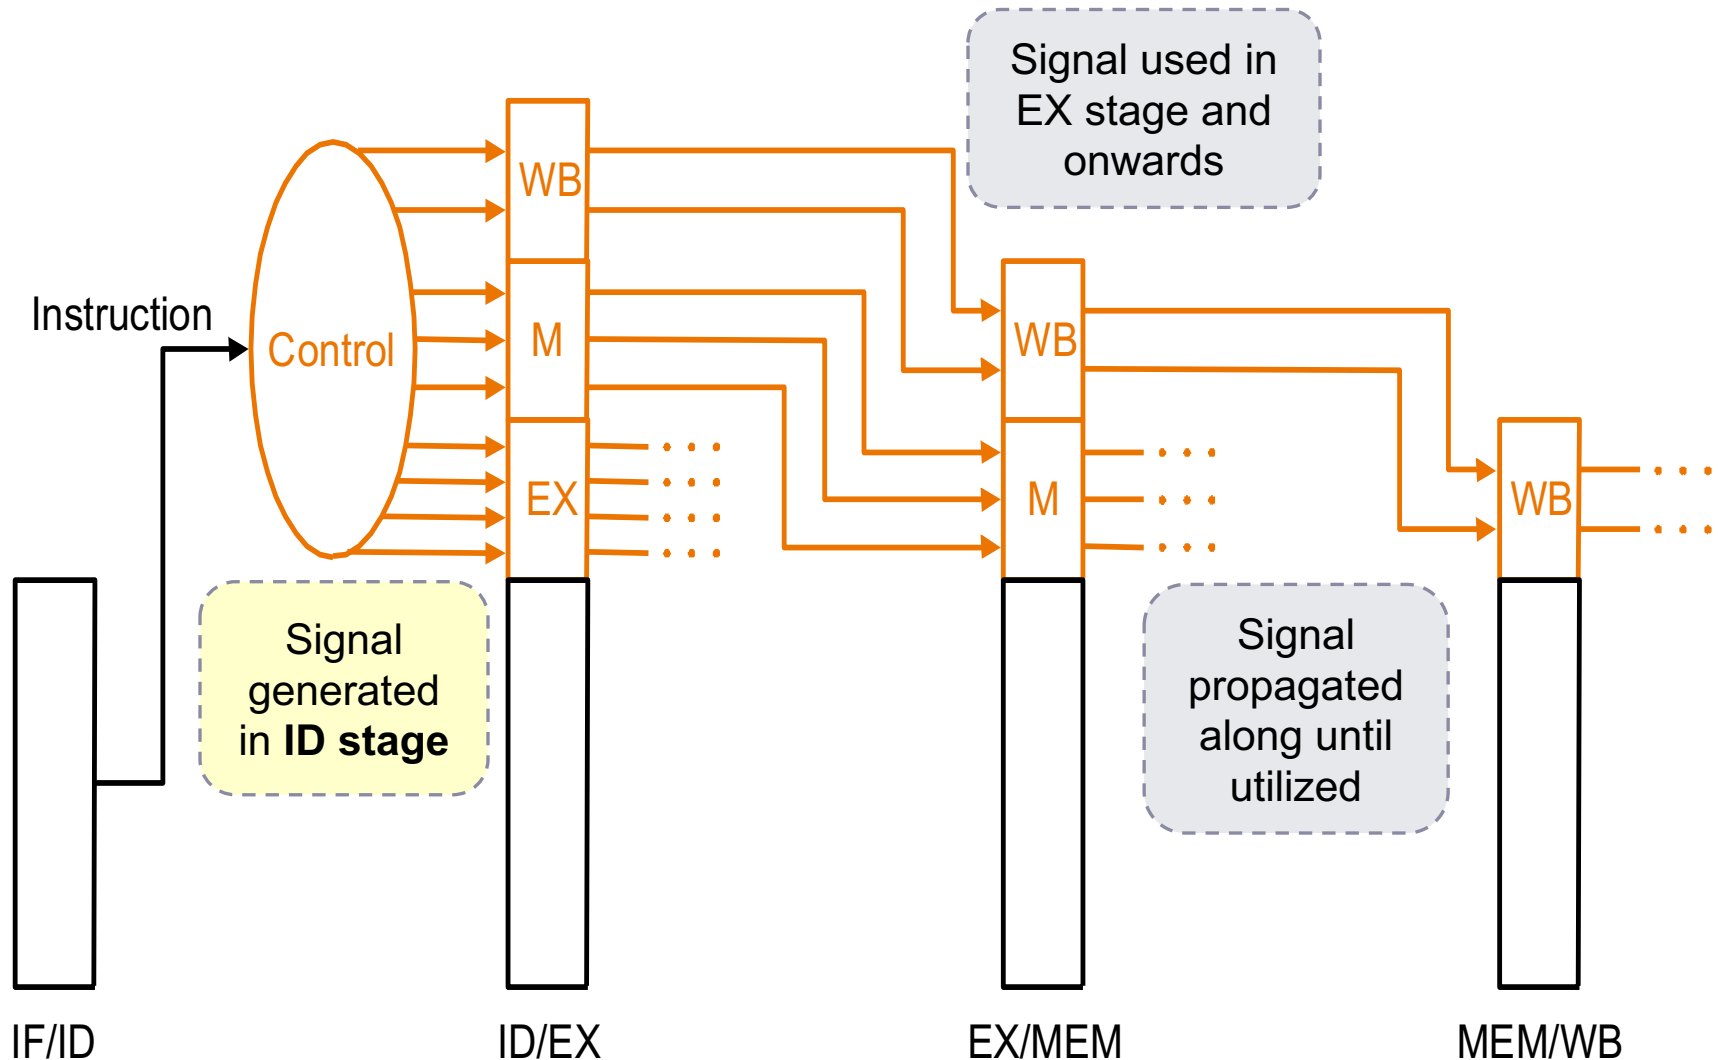
4. Pipeline Control: **Datapath** and **Control**
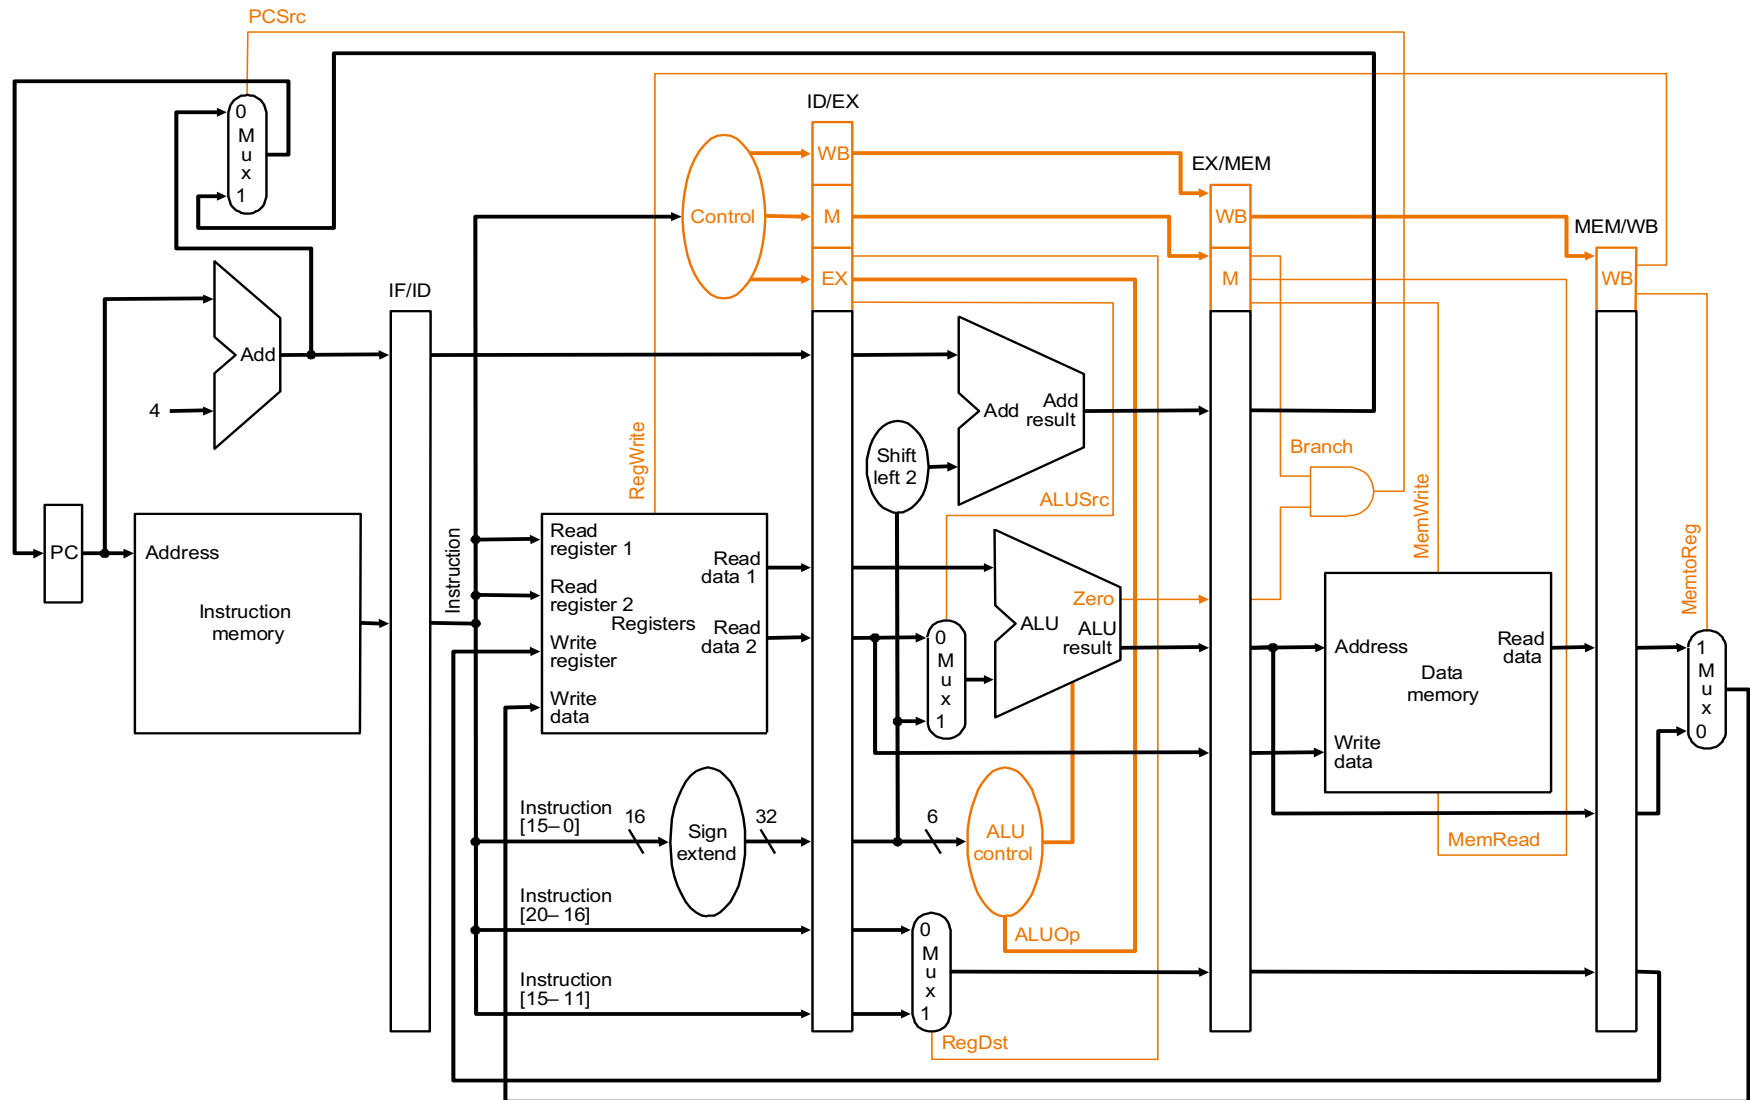
5. Different Implementations

Single-Cycle

	Cycle 1		Cycle 2	
Clk				

Load	Store	Waste

Multi-Cycle

Cycle 1	Cycle 2	Cycle 3	Cycle 4	Cycle 5	Cycle 6	Cycle 7	Cycle 8	Cycle 9	Cycle 10

Clk

Load					Store				R-type
IF	ID	EX	MEM	WB	IF	ID	EX	MEM	IF

Pipeline

Load	IF	ID	EX	MEM	WB	

Store		IF	ID	EX	MEM	WB

R-type			IF	ID	EX	MEM	WB
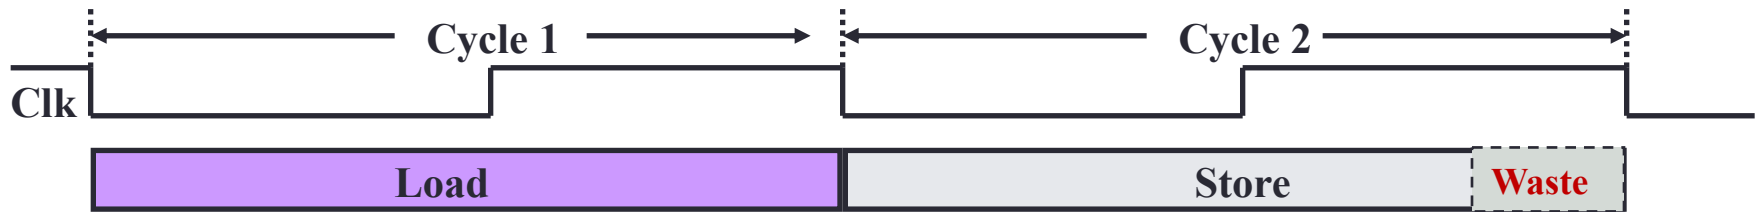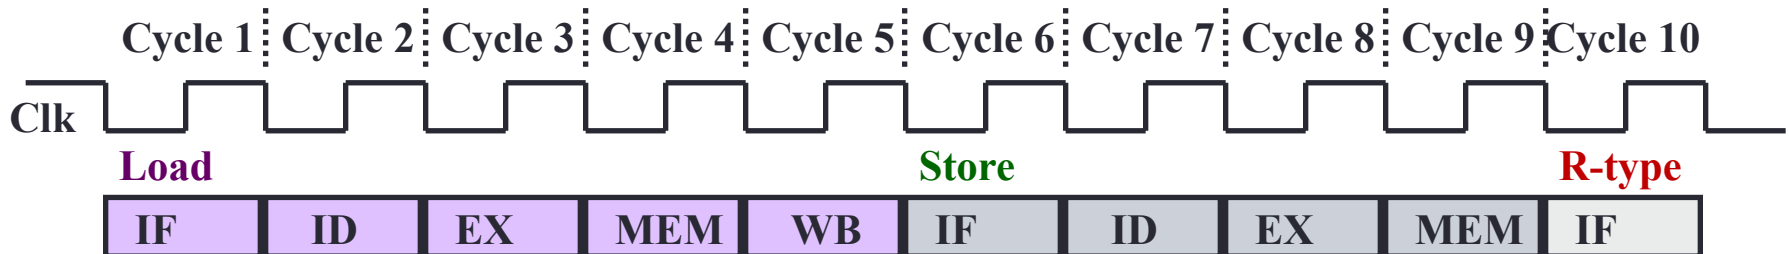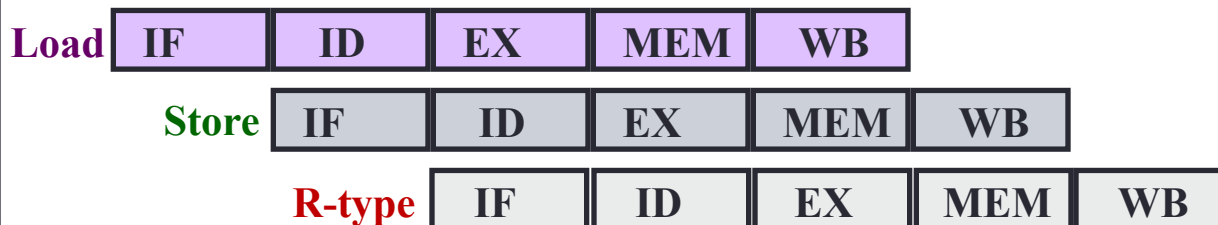
5. Single Cycle Processor: **Performance**

- Cycle time:
  - $CT_{seq} = \sum_{k=1}^{N} T_k$
  - T_k = Time for operation in stage k
  - N = Number of stages

- Total Execution Time for **I** instructions:
  - $Time_{seq}$ = Cycles $\times Cycle$Time
  $$= I \times CT_{seq} = \boldsymbol{I} \times \Sigma_{k=1}^{N} \boldsymbol{T_k}$$

5. Single Cycle Processor: **Example**

Instruction	Inst Mem	Reg read	ALU	Data Mem	Reg write	Total
ALU	2	1	2		1	**6**
lw	2	1	2	2	1	**8**
sw	2	1	2	2		**7**
beq	2	1	2			**5**

- ## Cycle Time

  - Choose the longest total time = **8ns**

- ## To execute **100 instructions:**

  - **100 × 8ns = 800ns**

5. Multi-Cycle Processor: **Performance**

- Cycle time:

  - $CT_{multi} = \max(T_k)$

  - $\max(T_k) = $ longest stage duration among the N stages

- Total Execution Time for **I** instructions:

  - $Time_{multi} = \text{Cycles} \times Cycle\text{Time}$

    $$= \text{I} \times \boldsymbol{Average\ CPI} \times CT_{multi}$$

  - Average CPI is needed because each instruction takes different number of cycles to finish

5. Multi-Cycle Processor: **Example**

Instruction	Inst Mem	Reg read	ALU	Data Mem	Reg write	Total
ALU	**2**	1	**2**		1	**6**
lw	**2**	1	**2**	**2**	1	**8**
sw	**2**	1	**2**	**2**		**7**
beq	**2**	1	**2**			**5**

- Cycle Time

  - Choose the longest stage time = **2ns**

- To execute **100 instructions**, with a given **average CPI of 4.6**

  - **100 × 4.6 × 2ns = 920ns**

5. Pipeline Processor: **Performance**

- Cycle Time:
  - $CT_{pipeline} = \max(T_k) + T_d$
  - $\max(T_k) = $ longest time among the N stages
  - T_d = Overhead for pipelining, e.g. pipeline register

- Cycles needed for **I** instructions:
  - $I + N - 1$
  - $N - 1$ is the cycles wasted in filling up the pipeline

- Total Time needed for **I** instructions :
  - $Time_{pipeline} = Cycle \times CT_{pipeline}$
    $$= (I + N - 1) \times (\max(T_k) + T_d)$$

5. Pipeline Processor: **Example**

Instruction	Inst Mem	Reg read	ALU	Data Mem	Reg write	Total
ALU	2	1	2		1	**6**
lw	2	1	2	2	1	**8**
sw	2	1	2	2		**7**
beq	2	1	2			**5**

- ## Cycle Time
  - assume pipeline register delay of **0.5ns**
  - longest stage time + overhead = **2 + 0.5 = 2.5ns**
- ## To execute **100 instructions:**
  - **(100 + 5 − 1) $\times$ 2.5ns = 260ns**

5. Pipeline Processor: **Ideal Speedup** (1/2)

- Assumptions for ideal case:
  - Every stage takes the same amount of time:
    - ➔ $\sum_{k=1}^{N} T_k = N \times T_k$
  - No pipeline overhead ➔ $T_d = 0$
  - Number of instructions **I**, is much larger than number of stages, **N**

- Note: The above also shows **how pipeline processor loses performance**

5. Pipeline Processor: **Ideal Speedup** (2/2)

- $Speedup_{pipeline} = \dfrac{Time_{seq}}{Time_{pipeline}}$

$$= \frac{I \times \sum_{k=1}^{N} T_k}{(I+N-1) \times (\max(T_k) + T_d)}$$

$$= \frac{I \times N \times T_k}{(I+N-1) \times T_k}$$

$$\approx \frac{I \times N \times T_k}{I \times T_k}$$

$$\approx N$$

> **Conclusion:**
> Pipeline processor can gain **N** times speedup, where **N** is the number of pipeline stages

Review Question

- Given this code:

```
add $t0, $s0, $s1
sub $t1, $s0, $s1
sll $t2, $s0, 2
srl $t3, $s1, 2
```

a) How many cycles will it take to execute the code on a single-cycle datapath?

b) How long will it take to execute the code on a single-cycle datapath, assuming a 100 MHz clock?

c) How many cycles will it take to execute the code on a 5-stage MIPS pipeline?

d) How long will it take to execute the code on a 5-stage MIPS pipeline, assuming a 500 MHz clock?

End of File