

SCALING A RECONFIGURABLE DATAFLOW ACCELERATOR

A DISSERTATION

SUBMITTED TO THE DEPARTMENT OF ELECTRICAL ENGINEERING

AND THE COMMITTEE ON GRADUATE STUDIES

OF STANFORD UNIVERSITY

IN PARTIAL FULFILLMENT OF THE REQUIREMENTS

FOR THE DEGREE OF

DOCTOR OF PHILOSOPHY

Yaqi Zhang

May 2020

Abstract

With the slowdown of Moore’s Law, specialized hardware accelerators are gaining tractions for delivering 100-1000x performance improvement over general-purpose processors in a variety of applications domains, such as cloud computing, biocomputing, artificial intelligence, etc. [1, 2, 3]. As the performance scaling in multicores is coming to a limit [4], a new class of accelerators—reconfigurable dataflow architectures (RDAs)—is promising in offering high-throughput and energy-efficient acceleration that keeps up with the performance demand. Instead of dynamically fetching instructions like in traditional processors, RDAs have flexible datapath that can be statically configured to spatially parallelize and pipeline the program across distributed on-chip resources. The pipelined execution model and explicitly-managed scratchpad in RDAs eliminate the performance, area, and energy overhead in dynamic scheduling and conventional memory hierarchy.

To adapt to the compute intensity in modern data-analytic workloads, particularly in the deep learning domain, RDAs are increasing to a scale that was unprecedented before. With an area footprint of 133mm² at 28nm, Plasticine is a hierarchical RDA supplying 12.3 TFLOPs of computing power [5]. Prior work has shown an up to 76x performance/watt benefit from Plasticine over a Stradix V FPGA due to an advantage in clock frequency and resource density. The increase in scale introduces new challenges in network-on-chip design to maintain the throughput and energy efficiency of RDAs. Furthermore, targeting and managing RDAs at this scale also require new strategies in mapping, memory management, and flexible control to fully utilize their compute power.

In this work, we focus on two aspects of the software-hardware co-design that impact the usability and scalability of the Plasticine accelerator. Although RDAs are flexible to support a wide range of applications, the biggest challenge that hinders the adoption of these accelerators is the required low-level knowledge in microarchitecture design and hardware constraints in order to efficiently implement a new application. To address this challenge, we introduce a compiler stack—SARA—that raises the programming abstraction of Plasticine to an imperative-style domain-specific language

(DSL) with nested control flow for general spatial architectures. Besides architecture-agnostic, this abstraction contains explicit loop constructs, enabling cross-kernel optimizations that are often not explored when programming RDAs. SARA efficiently translates imperative control constructs to a streaming dataflow graph that scale performance with distributed on-chip resources. By virtualizing resources, SARA systematically handles the physical constraints, hiding the low-level physical limitations from the programmers. To address the scalability challenge with increasing chip sizes in RDAs, we present a comprehensive study on the network-on-chip design space for RDAs [6]. We found that network performance highly correlates to network bandwidth, as supposed to latency, for RDAs with streaming dataflow execution model. Lastly, we show that a static-dynamic hybrid network design can sustain performance in a scalable fashion with high energy efficiency.

Acknowledgements

I would like to thank my mother and the little green men from Mars.

Contents

Abstract	iv
Acknowledgements	vi
1 Introduction (WIP)	1
1.1 The Rising of Hardware Acceleration	1
1.2 The Need for Flexible Interconnects	4
1.3 The Gap between High-Level DSLs and Dataflow Accelerators	4
1.4 Contribution	5
1.5 Outline	6
Bibliography	7

List of Tables

1.1	OPS comparison of different CGRAs	3
-----	---	---

List of Figures

1.1 Average utilization vs. peak compute density tradeoff 2

Chapter 1

Introduction (WIP)

1.1 The Rising of Hardware Acceleration

With the end of Dennard Scaling [7], the amount of performance one can extract from a CPU is reaching a limit. To provide general-purpose flexibility, CPUs spend the majority of resources and energy on overheads, including dynamic-instruction fetching and decoding, branch prediction, and a cache hierarchy, etc., with less than 20% of the energy on the actual computation [8]. Even worse, power wall is limiting the entire multicore family to reach the doubled performance per generation enabled by technology scaling in the past [4].

For this reason, hardware acceleration is emerging in various compute-intensive application domains to provide orders of magnitude acceleration, enabling algorithms that were otherwise infeasible [3, 2, 9, 10]. Examples include widely adopted General-Purpose Graphics Processing Units (GPGPUs) in computational genomics, signal processing, graph processing, and deep learning, etc. [3, 2, 1]. Moreover, many recent efforts are spent on leveraging application domain knowledge in hardware design to enable continued performance scaling while meeting the power budget [11]. As artificial intelligence receiving great success in industry and business, past years have seen a growing interest in machine learning accelerators; these accelerators contain specialized circuits for ML kernels that dramatically improve the compute efficiency [12, 13, 14, 15, 16, 17].

Nonetheless, it is non-trivial to achieve good utilization of these accelerators. While the peak FLOPS of GPU has increased by over 20x in the past 10 years, the achievable FLOPS is not increasing accordingly [18, 19]. The massive threads in GPU require embarrassingly parallel workloads to

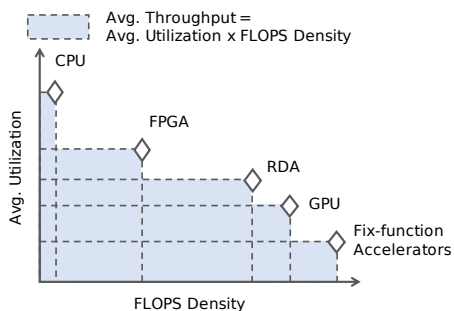


Figure 1.1: Tradeoff between the average utilization of the peak FLOPS over a range of applications vs. the peak compute density among different architectures. The shaded area indicates the effective FLOPS achieved. With all the dynamic scheduling hardware in CPUs, such as prefetching and branch prediction, CPU can achieve a fairly decent instruction per cycle (IPC) for data-analytic workloads that have a regular control flow. However, overheads to support flexibility, security, and programmability in CPU result in a low FLOPS density. While GPU and fix-function accelerators have a high FLOPS density, they are prone to underutilization due to variation in application characteristics. Fine-grained reconfigurable datapath makes it easy to utilize on-chip resources of an FPGA. However, the soft logics and overheads in routing resources lead to a low resource density and clock frequency. RDAs have the right balance between flexibility and efficiency, which gives a good overall average utilization.

fully saturate the compute throughput. GPU's bulk-synchronous nature also causes poor cache efficiency; data are spilled off-chip before getting reused [20]. On the other hand, while extremely efficient for certain models, machine learning accelerators are highly specialized for specific kernels, especially general matrix multiply (GEMM) and convolution. However, ML algorithms evolve much faster than the development and manufacture cycle of hardware, leading to inefficiency or even unsupported applications. For example, hybrid models, such as Mask R-CNN [21] and DeepLab [22], contain combinations of GEMM-compatible and incompatible operations, both computationally expensive. Fix-functional accelerators focusing on GEMM operations, such as TPU [13], have to rely on CPUs for unsupported operations or convert non-GEMM operations to GEMM operations, resulting in a severe performance gap between the peak and effective FLOPS [23]. Figure 1.1 illustrates a tradeoff between average utilization of the peak FLOPS over a range of data and the peak FLOPS available on the hardware.

Reconfigurable spatial architectures overcome this limitation by changing its datapath based on applications' needs. Applications are configured at the circuit-level without dynamic instruction fetching and decoding, hence improving energy-efficiency [24, 25]. In addition to instruction, data, and task-level parallelism explored by processor architectures, spatial architectures also explore instruction and task-level pipelining that further increase the compute throughput [26]. Exploring

Architectures	DySER [36]	TI [41]	revel [49]	Plasticine [5]	Gorgon [46]
OPS	128GOPS	64GOPS	300GOPS	12.3TFLOPS	38.4TFLOPS

Table 1.1: OPS comparison of different CGRAs. Gorgon is a Plasticine variant proposed for joint machine learning and database acceleration.

pipeline parallelism enables spatial architectures to achieve a high-throughput without massively parallelize every stage of the program. Flexible datapath also permits resource distribution proportional to the compute intensity of program stages. Key performance optimization on reconfigurable accelerators is an application-level design space exploration searching for the best resource distribution scheme that balances the compute pipeline [27].

One of the mainstream reconfigurable spatial architecture is Field Programmable Gate Arrays (FPGAs) that support fine-grain, bit-level reconfigurability with a soft logic fabric [28]. The flexible interconnect and lookup table-based logic gate can be configured to implement arbitrary datapath. FPGAs have been used to deploy services commercially [29, 30, 31] and can be rented on the AWS F1 cloud [32]. Although around for a long time, FPGAs are not broadly accepted among high-level application programmers due to their low-level programming interface and long compilation time. Fine-tuning applications on FPGAs require expertise in digital design and takes a long development cycle, which hinders their accessibility to the general software community. As an application-level accelerator, FPGAs also suffers from overhead from fine-grained reconfigurability; studies have shown that over 60% of the chip area of an FPGA is spent on routing resources [33, 24, 25].

In contrast to fine-grained reconfigurable architectures, Coarse-Grained Reconfigurable Arrays (CGRAs) are spatial architectures with coarse-grained building blocks, such as ALUs, register files, and memory controllers, distributed in a programmable, word or vector-level static interconnect [34, 35, 36, 37, 38, 39, 40]. We refer a subclass of CGRAs with dataflow-driven execution model as Reconfigurable Dataflow Architectures (RDAs)¹ [5, 41, 42, 43, 44, 45]. Lately, RDAs are emerging as a new class of spatial accelerators that retain the desired level of flexibility and energy efficiency without the area overhead and low clock frequency due to bit-level reconfigurability. Our previously proposed RDA–Plasticine–has demonstrated a promising acceleration of dense, sparse, database, and streaming applications [5, 46, 47, 48]. To meet the computing demand of recent data-analytic workload, Plasticine is a large-scale RDA compared to traditional CGRAs. Table 1.1 shows the OPS comparison across a few CGRAs proposed in the prior works.

¹Dataflow overlay architectures on FPGA are technically also RDAs, which are not primary concern in the discussion of this work.

The scale of Plasticine introduces challenges in network-on-chip design to sustain bandwidth requirements while staying energy-efficient. On the other hand, the compilation strategy also needs to be adjusted to explore multiple-levels of concurrency in the program to saturate the compute throughput of the large-scale RDA. Furthermore, the strategy must introduce minimum synchronization overhead to maximize the scalability of the mapped design.

1.2 The Need for Flexible Interconnects

Applications are mapped to RDAs by distributing computations spatially across multiple processing blocks and executing them in a pipelined, data-driven fashion. On traditional Networks on Chip (NoCs), communication is the result of explicit message passing by parallel workers or cache misses; these are bursty and relatively infrequent. On RDAs, however, applications are distributed by parallelizing and pipelining; pipelining introduces frequent and throughput-sensitive communication. Because different applications are parallelized and pipelined differently, they have different communication requirements.

RDAs need the right amount of interconnect flexibility to achieve good resource utilization; an inflexible interconnect constrains the space of valid application mappings and hinders resource utilization. Furthermore, in the quest to increase compute density, RDA data paths now contain increasingly coarse-grained processing blocks such as pipelined, vectorized functional units [5, 37, 50].

Plasticine, as an example, has a 512-bit vector bus, which necessitates coarser communication and higher on-chip interconnect bandwidth to avoid creating performance bottlenecks. Although many hardware accelerators with large, vectorized data paths have fixed local networks [51], there is a need for more flexible global networks to adapt to future applications. Consequently, interconnect design for these RDAs involves achieving a balance between the often conflicting requirements of high bandwidth and high flexibility.

1.3 The Gap between High-Level DSLs and Dataflow Accelerators

Recent years has seen a rise in interests in research in hardware accelerators, primarily motivated by AI applications. On one hand, the huge success of adoption of AI in the various domain has

motivated various machine learning specialized hardware in the architecture community. On the other hand, research in machine learning algorithms has been expedited by the increasing powerful hardware accelerators, enabling the next-level algorithms that were not feasible in just decades ago. Research in software infrastructure for these accelerators, however, is just emerging. Unlike CPUs, these accelerators do not support a standard ISAs, alleviating the overhead from layers of abstractions and the burden of backward compatibility. Nonetheless, lack of a common abstraction makes it very hard to sharing compiler infrastructure across accelerators.

1.4 Contribution

In this work, we start by detailing the key considerations involved in building an RDA network, including those arising from network design, RDA architecture, and the characteristics of spatially mapped applications. Network designs must be carefully considered because vectorization magnifies inefficiencies: the increased network area of a vectorized design ensures that any overhead has a significant impact. Next, we evaluate the performance, area, and power requirements of several interconnection designs using cycle-accurate simulation and ASIC synthesis of a switch and router with a 28 nm industrial technology library. We then explore a variety of design points, including static, dynamic, and hybrid networks, decreased flit widths and VC counts for dynamic networks and different flow-control strategies for static networks.

We show that RDA network designs must consider application characteristics and the execution model of the underlying architecture. Performance scales strongly with network bandwidth, with an 8x average performance gap between the best and worst configurations. The hybrid network gives the best network energy-efficiency: a 1.83x average improvement over the static network. On pipelined architectures, hybrid networks can also match the performance per area of higher bandwidth, purely static networks with less than 8% performance loss.

The key contributions of this paper are:

1. An analysis of key communication patterns exhibited by spatial architectures.
2. A network-aware compiler flow that efficiently targets static, dynamic, and hybrid networks with varying granularities.
3. A quantitative analysis of the performance, area, and energy trade-offs involved in choosing an RDA network, using benchmarks drawn from various application domains.

1.5 Outline

Bibliography

- [1] C. Kachris and D. Soudris, "A survey on reconfigurable accelerators for cloud computing," in *2016 26th International Conference on Field Programmable Logic and Applications (FPL)*, pp. 1–10, 2016.
- [2] S. Sarkar, T. Majumder, A. Kalyanaraman, and P. P. Pande, "Hardware accelerators for biocomputing: A survey," in *Proceedings of 2010 IEEE International Symposium on Circuits and Systems*, pp. 3789–3792, 2010.
- [3] S. Aluru and N. Jammula, "A review of hardware acceleration for computational genomics," *IEEE Design Test*, vol. 31, no. 1, pp. 19–30, 2014.
- [4] H. Esmailzadeh, E. Blem, R. S. Amant, K. Sankaralingam, and D. Burger, "Dark silicon and the end of multicore scaling," in *2011 38th Annual International Symposium on Computer Architecture (ISCA)*, pp. 365–376, June 2011.
- [5] R. Prabhakar, Y. Zhang, D. Koeplinger, M. Feldman, T. Zhao, S. Hadjis, A. Pedram, C. Kozyrakis, and K. Olukotun, "Plasticine: A reconfigurable architecture for parallel patterns," in *Proceedings of the 44th Annual International Symposium on Computer Architecture, ISCA '17*, (New York, NY, USA), pp. 389–402, ACM, 2017.
- [6] Y. Zhang, A. Rucker, M. Vilim, R. Prabhakar, W. Hwang, and K. Olukotun, "Scalable interconnects for reconfigurable spatial architectures," in *Proceedings of the 46th International Symposium on Computer Architecture, ISCA '19*, (New York, NY, USA), pp. 615–628, ACM, 2019.
- [7] R. H. Dennard, F. H. Gaensslen, V. L. Rideout, E. Bassous, and A. R. LeBlanc, "Design of ion-implanted mosfet's with very small physical dimensions," *IEEE Journal of Solid-State Circuits*, vol. 9, pp. 256–268, Oct 1974.

- [8] R. Hameed, W. Qadeer, M. Wachs, O. Azizi, A. Solomatnikov, B. C. Lee, S. Richardson, C. Kozyrakis, and M. Horowitz, "Understanding sources of inefficiency in general-purpose chips," in *Proceedings of the 37th Annual International Symposium on Computer Architecture, ISCA '10*, (New York, NY, USA), pp. 37–47, ACM, 2010.
- [9] M. A. Dias and D. A. P. Ferreira, "Deep learning in reconfigurable hardware: A survey," in *2019 IEEE International Parallel and Distributed Processing Symposium Workshops (IPDPSW)*, pp. 95–98, 2019.
- [10] A. Gielata, P. Russek, and K. Wiatr, "Aes hardware implementation in fpga for algorithm acceleration purpose," in *2008 International Conference on Signals and Electronic Systems*, pp. 137–140, 2008.
- [11] J. L. Hennessy and D. A. Patterson, "A new golden age for computer architecture," *Commun. ACM*, vol. 62, pp. 48–60, Jan. 2019.
- [12] Y. Chen, T. Luo, S. Liu, S. Zhang, L. He, J. Wang, L. Li, T. Chen, Z. Xu, N. Sun, and O. Temam, "Dadiannao: A machine-learning supercomputer," in *Proceedings of the 47th Annual IEEE/ACM International Symposium on Microarchitecture, MICRO-47*, (Washington, DC, USA), pp. 609–622, IEEE Computer Society, 2014.
- [13] N. P. Jouppi, C. Young, N. Patil, D. Patterson, G. Agrawal, R. Bajwa, S. Bates, S. Bhatia, N. Boden, A. Borchers, R. Boyle, P.-I. Cantin, C. Chao, C. Clark, J. Coriell, M. Daley, M. Dau, J. Dean, B. Gelb, T. V. Ghaemmghami, R. Gottipati, W. Gulland, R. Hagmann, C. R. Ho, D. Hogberg, J. Hu, R. Hundt, D. Hurt, J. Ibarz, A. Jaffey, A. Jaworski, A. Kaplan, H. Khaitan, D. Killebrew, A. Koch, N. Kumar, S. Lacy, J. Laudon, J. Law, D. Le, C. Leary, Z. Liu, K. Lucke, A. Lundin, G. MacKean, A. Maggiore, M. Mahony, K. Miller, R. Nagarajan, R. Narayanaswami, R. Ni, K. Nix, T. Norrie, M. Omernick, N. Penukonda, A. Phelps, J. Ross, M. Ross, A. Salek, E. Samadiani, C. Severn, G. Sizikov, M. Snellman, J. Souter, D. Steinberg, A. Swing, M. Tan, G. Thorson, B. Tian, H. Toma, E. Tuttle, V. Vasudevan, R. Walter, W. Wang, E. Wilcox, and D. H. Yoon, "In-datacenter performance analysis of a tensor processing unit," *SIGARCH Comput. Archit. News*, vol. 45, pp. 1–12, June 2017.
- [14] S. Han, X. Liu, H. Mao, J. Pu, A. Pedram, M. A. Horowitz, and W. J. Dally, "Eie: Efficient inference engine on compressed deep neural network," in *Proceedings of the 43rd International*

- Symposium on Computer Architecture, ISCA '16*, (Piscataway, NJ, USA), pp. 243–254, IEEE Press, 2016.
- [15] Y.-H. Chen, T. Krishna, J. S. Emer, and V. Sze, “Eyeriss: An energy-efficient reconfigurable accelerator for deep convolutional neural networks,” *IEEE Journal of Solid-State Circuits*, vol. 52, no. 1, pp. 127–138, 2017.
- [16] M. Gao, X. Yang, J. Pu, M. Horowitz, and C. Kozyrakis, “Tangram: Optimized coarse-grained dataflow for scalable nn accelerators,” in *Proceedings of the Twenty-Fourth International Conference on Architectural Support for Programming Languages and Operating Systems, ASPLOS '19*, (New York, NY, USA), p. 807–820, Association for Computing Machinery, 2019.
- [17] F. Akopyan, J. Sawada, A. Cassidy, R. Alvarez-Icaza, J. Arthur, P. Merolla, N. Imam, Y. Nakamura, P. Datta, G. Nam, B. Taba, M. Beakes, B. Brezzo, J. B. Kuang, R. Manohar, W. P. Risk, B. Jackson, and D. S. Modha, “Truenorth: Design and tool flow of a 65 mw 1 million neuron programmable neurosynaptic chip,” *IEEE Transactions on Computer-Aided Design of Integrated Circuits and Systems*, vol. 34, no. 10, pp. 1537–1557, 2015.
- [18] K. Rupp, “www.karlrupp.net.”
- [19] J. W. Richardson, A. D. George, and H. Lam, “Performance analysis of gpu accelerators with realizable utilization of computational density,” in *2012 Symposium on Application Accelerators in High Performance Computing*, pp. 137–140, 2012.
- [20] J. Hestness, S. W. Keckler, and D. A. Wood, “Gpu computing pipeline inefficiencies and optimization opportunities in heterogeneous cpu-gpu processors,” in *2015 IEEE International Symposium on Workload Characterization*, pp. 87–97, 2015.
- [21] K. He, G. Gkioxari, P. Dollár, and R. Girshick, “Mask r-cnn,” in *2017 IEEE International Conference on Computer Vision (ICCV)*, pp. 2980–2988, 2017.
- [22] L. Chen, G. Papandreou, I. Kokkinos, K. Murphy, and A. L. Yuille, “Deeplab: Semantic image segmentation with deep convolutional nets, atrous convolution, and fully connected crfs,” *IEEE Transactions on Pattern Analysis and Machine Intelligence*, vol. 40, no. 4, pp. 834–848, 2018.
- [23] C. Guo, Y. Zhou, J. Leng, Y. Zhu, Z. Du, Q. Chen, C. Li, M. Guo, and B. Yao, “Balancing efficiency and flexibility for dnn acceleration via temporal gpu-systolic array integration,” 2020.

- [24] B. H. Calhoun, J. F. Ryan, S. Khanna, M. Putic, and J. Lach, "Flexible circuits and architectures for ultralow power," *Proceedings of the IEEE*, vol. 98, pp. 267–282, Feb 2010.
- [25] K. K. W. Poon, S. J. E. Wilton, and A. Yan, "A detailed power model for field-programmable gate arrays," *ACM Trans. Des. Autom. Electron. Syst.*, vol. 10, pp. 279–302, Apr. 2005.
- [26] M. Budiu, G. Venkataramani, T. Chelcea, and S. C. Goldstein, "Spatial computation," in *Proceedings of the 11th International Conference on Architectural Support for Programming Languages and Operating Systems, ASPLOS XI*, (New York, NY, USA), pp. 14–26, ACM, 2004.
- [27] D. Koeplinger, R. Prabhakar, Y. Zhang, C. Delimitrou, C. Kozyrakis, and K. Olukotun, "Automatic generation of efficient accelerators for reconfigurable hardware," in *2016 ACM/IEEE 43rd Annual International Symposium on Computer Architecture (ISCA)*, pp. 115–127, June 2016.
- [28] I. Kuon, R. Tessier, and J. Rose, "Fpga architecture: Survey and challenges," *Foundations and Trends in Electronic Design Automation*, vol. 2, pp. 135–253, 01 2007.
- [29] A. Putnam, A. M. Caulfield, E. S. Chung, D. Chiou, K. Constantinides, J. Demme, H. Esmaeilzadeh, J. Fowers, G. P. Gopal, J. Gray, M. Haselman, S. Hauck, S. Heil, A. Hormati, J.-Y. Kim, S. Lanka, J. Larus, E. Peterson, S. Pope, A. Smith, J. Thong, P. Y. Xiao, and D. Burger, "A reconfigurable fabric for accelerating large-scale datacenter services," in *Proceeding of the 41st Annual International Symposium on Computer Architecture, ISCA '14*, (Piscataway, NJ, USA), pp. 13–24, IEEE Press, 2014.
- [30] J. Ouyang, S. Lin, W. Qi, Y. Wang, B. Yu, and S. Jiang, "Sda: Software-defined accelerator for largescale dnn systems," *Hot Chips 26*, 2014.
- [31] K. Guo, L. Sui, J. Qiu, S. Yao, S. Han, Y. Wang, and H. Yang, "From model to fpga: Software-hardware co-design for efficient neural network acceleration," in *2016 IEEE Hot Chips 28 Symposium (HCS)*, pp. 1–27, Aug 2016.
- [32] A. AWS, "Amazon ec2 f1 instances." <https://aws.amazon.com/ec2/instance-types/f1>.
- [33] I. Kuon, R. Tessier, and J. Rose, "Fpga architecture: Survey and challenges," *Found. Trends Electron. Des. Autom.*, vol. 2, pp. 135–253, Feb. 2008.

- [34] B. Mei, S. Vernalde, D. Verkest, H. De Man, and R. Lauwereins, "Adres: An architecture with tightly coupled vliw processor and coarse-grained reconfigurable matrix," in *Field Programmable Logic and Application* (P. Y. K. Cheung and G. A. Constantinides, eds.), (Berlin, Heidelberg), pp. 61–70, Springer Berlin Heidelberg, 2003.
- [35] R. Kress, "A fast reconfigurable alu for xputers," 1996.
- [36] V. Govindaraju, C.-H. Ho, and K. Sankaralingam, "Dynamically specialized datapaths for energy efficient computing," in *Proceedings of the 2011 IEEE 17th International Symposium on High Performance Computer Architecture, HPCA '11*, (Washington, DC, USA), pp. 503–514, IEEE Computer Society, 2011.
- [37] S. C. Goldstein, H. Schmit, M. Moe, M. Budiu, S. Cadambi, R. R. Taylor, and R. Laufer, "Piperench: a coprocessor for streaming multimedia acceleration," in *Proceedings of the 26th International Symposium on Computer Architecture (Cat. No.99CB36367)*, pp. 28–39, May 1999.
- [38] M. Mishra, T. J. Callahan, T. Chelcea, G. Venkataramani, S. C. Goldstein, and M. Budiu, "Tartan: Evaluating spatial computation for whole program execution," in *Proceedings of the 12th International Conference on Architectural Support for Programming Languages and Operating Systems, ASPLOS XII*, (New York, NY, USA), pp. 163–174, ACM, 2006.
- [39] M. Gao and C. Kozyrakis, "Hrl: Efficient and flexible reconfigurable logic for near-data processing," in *2016 IEEE International Symposium on High Performance Computer Architecture (HPCA)*, pp. 126–137, March 2016.
- [40] M. Karunaratne, A. K. Mohite, T. Mitra, and L.-S. Peh, "Hycube: A cgra with reconfigurable single-cycle multi-hop interconnect," in *Proceedings of the 54th Annual Design Automation Conference 2017, DAC '17*, (New York, NY, USA), pp. 45:1–45:6, ACM, 2017.
- [41] A. Parashar, M. Pellauer, M. Adler, B. Ahsan, N. Crago, D. Lustig, V. Pavlov, A. Zhai, M. Gambhir, A. Jaleel, R. Allmon, R. Rayess, S. Maresh, and J. Emer, "Triggered instructions: A control paradigm for spatially-programmed architectures," in *Proceedings of the 40th Annual International Symposium on Computer Architecture, ISCA '13*, (New York, NY, USA), pp. 142–153, ACM, 2013.
- [42] T. Nowatzki, V. Gangadhar, N. Ardalani, and K. Sankaralingam, "Stream-dataflow acceleration," in *2017 ACM/IEEE 44th Annual International Symposium on Computer Architecture (ISCA)*, pp. 416–429, June 2017.

- [43] C. Farabet, B. Martini, B. Corda, P. Akselrod, E. Culurciello, and Y. LeCun, "Neuflow: A run-time reconfigurable dataflow processor for vision," in *CVPR 2011 WORKSHOPS*, pp. 109–116, 2011.
- [44] M. Oh, C. Lee, S. Lee, Y. Seo, S. Kim, J. Wang, and C. Sungchung Park, "Convolutional neural network accelerator with reconfigurable dataflow," in *2018 International SoC Design Conference (ISOCC)*, pp. 42–43, 2018.
- [45] A. Niedermeier, J. Kuper, and G. Smit, "Dataflow-based reconfigurable architecture for streaming applications," in *2012 International Symposium on System on Chip (SoC)*, pp. 1–4, 2012.
- [46] M. Vilim, A. Rucker, Y. Zhang, S. Liu, and K. Olukotun, "Gorgon: Accelerating machine learning from relational data," in *Proceedings of the 47th International Symposium on Computer Architecture, ISCA '20*, 2020.
- [47] R. Singhal, Y. Zhang, J. Ullman, R. Prabhakar, and K. Olukotun, "Efficient multiway hash join on reconfigurable hardware," in *Technology Conference on Performance Evaluation and Benchmarking*, 05 2019.
- [48] R. Prabhakar, O. A. Olukotun, C. Kozyrakis, and C. Re. PhD thesis, 2018.
- [49] J. Weng, S. Liu, Z. Wang, V. Dadu, and T. Nowatzki, "A hybrid systolic-dataflow architecture for inductive matrix algorithms," in *2020 IEEE International Symposium on High Performance Computer Architecture (HPCA)*, pp. 703–716, 2020.
- [50] J. Noguera, C. Dick, V. Kathail, G. Singh, K. Vissers, and R. Wittig, "Xilinx project everest: 'hw/sw programmable engine'," *Hot Chips* 30, 2018.
- [51] J. Fowers, K. Ovtcharov, M. Papamichael, T. Massengill, M. Liu, D. Lo, S. Alkalay, M. Haselman, L. Adams, M. Ghandi, S. Heil, P. Patel, A. Sapek, G. Weisz, L. Woods, S. Lanka, S. K. Reinhardt, A. M. Caulfield, E. S. Chung, and D. Burger, "A configurable cloud-scale DNN processor for real-time AI," in *45th ACM/IEEE Annual International Symposium on Computer Architecture, ISCA 2018, Los Angeles, CA, USA, June 1-6, 2018*, pp. 1–14, 2018.