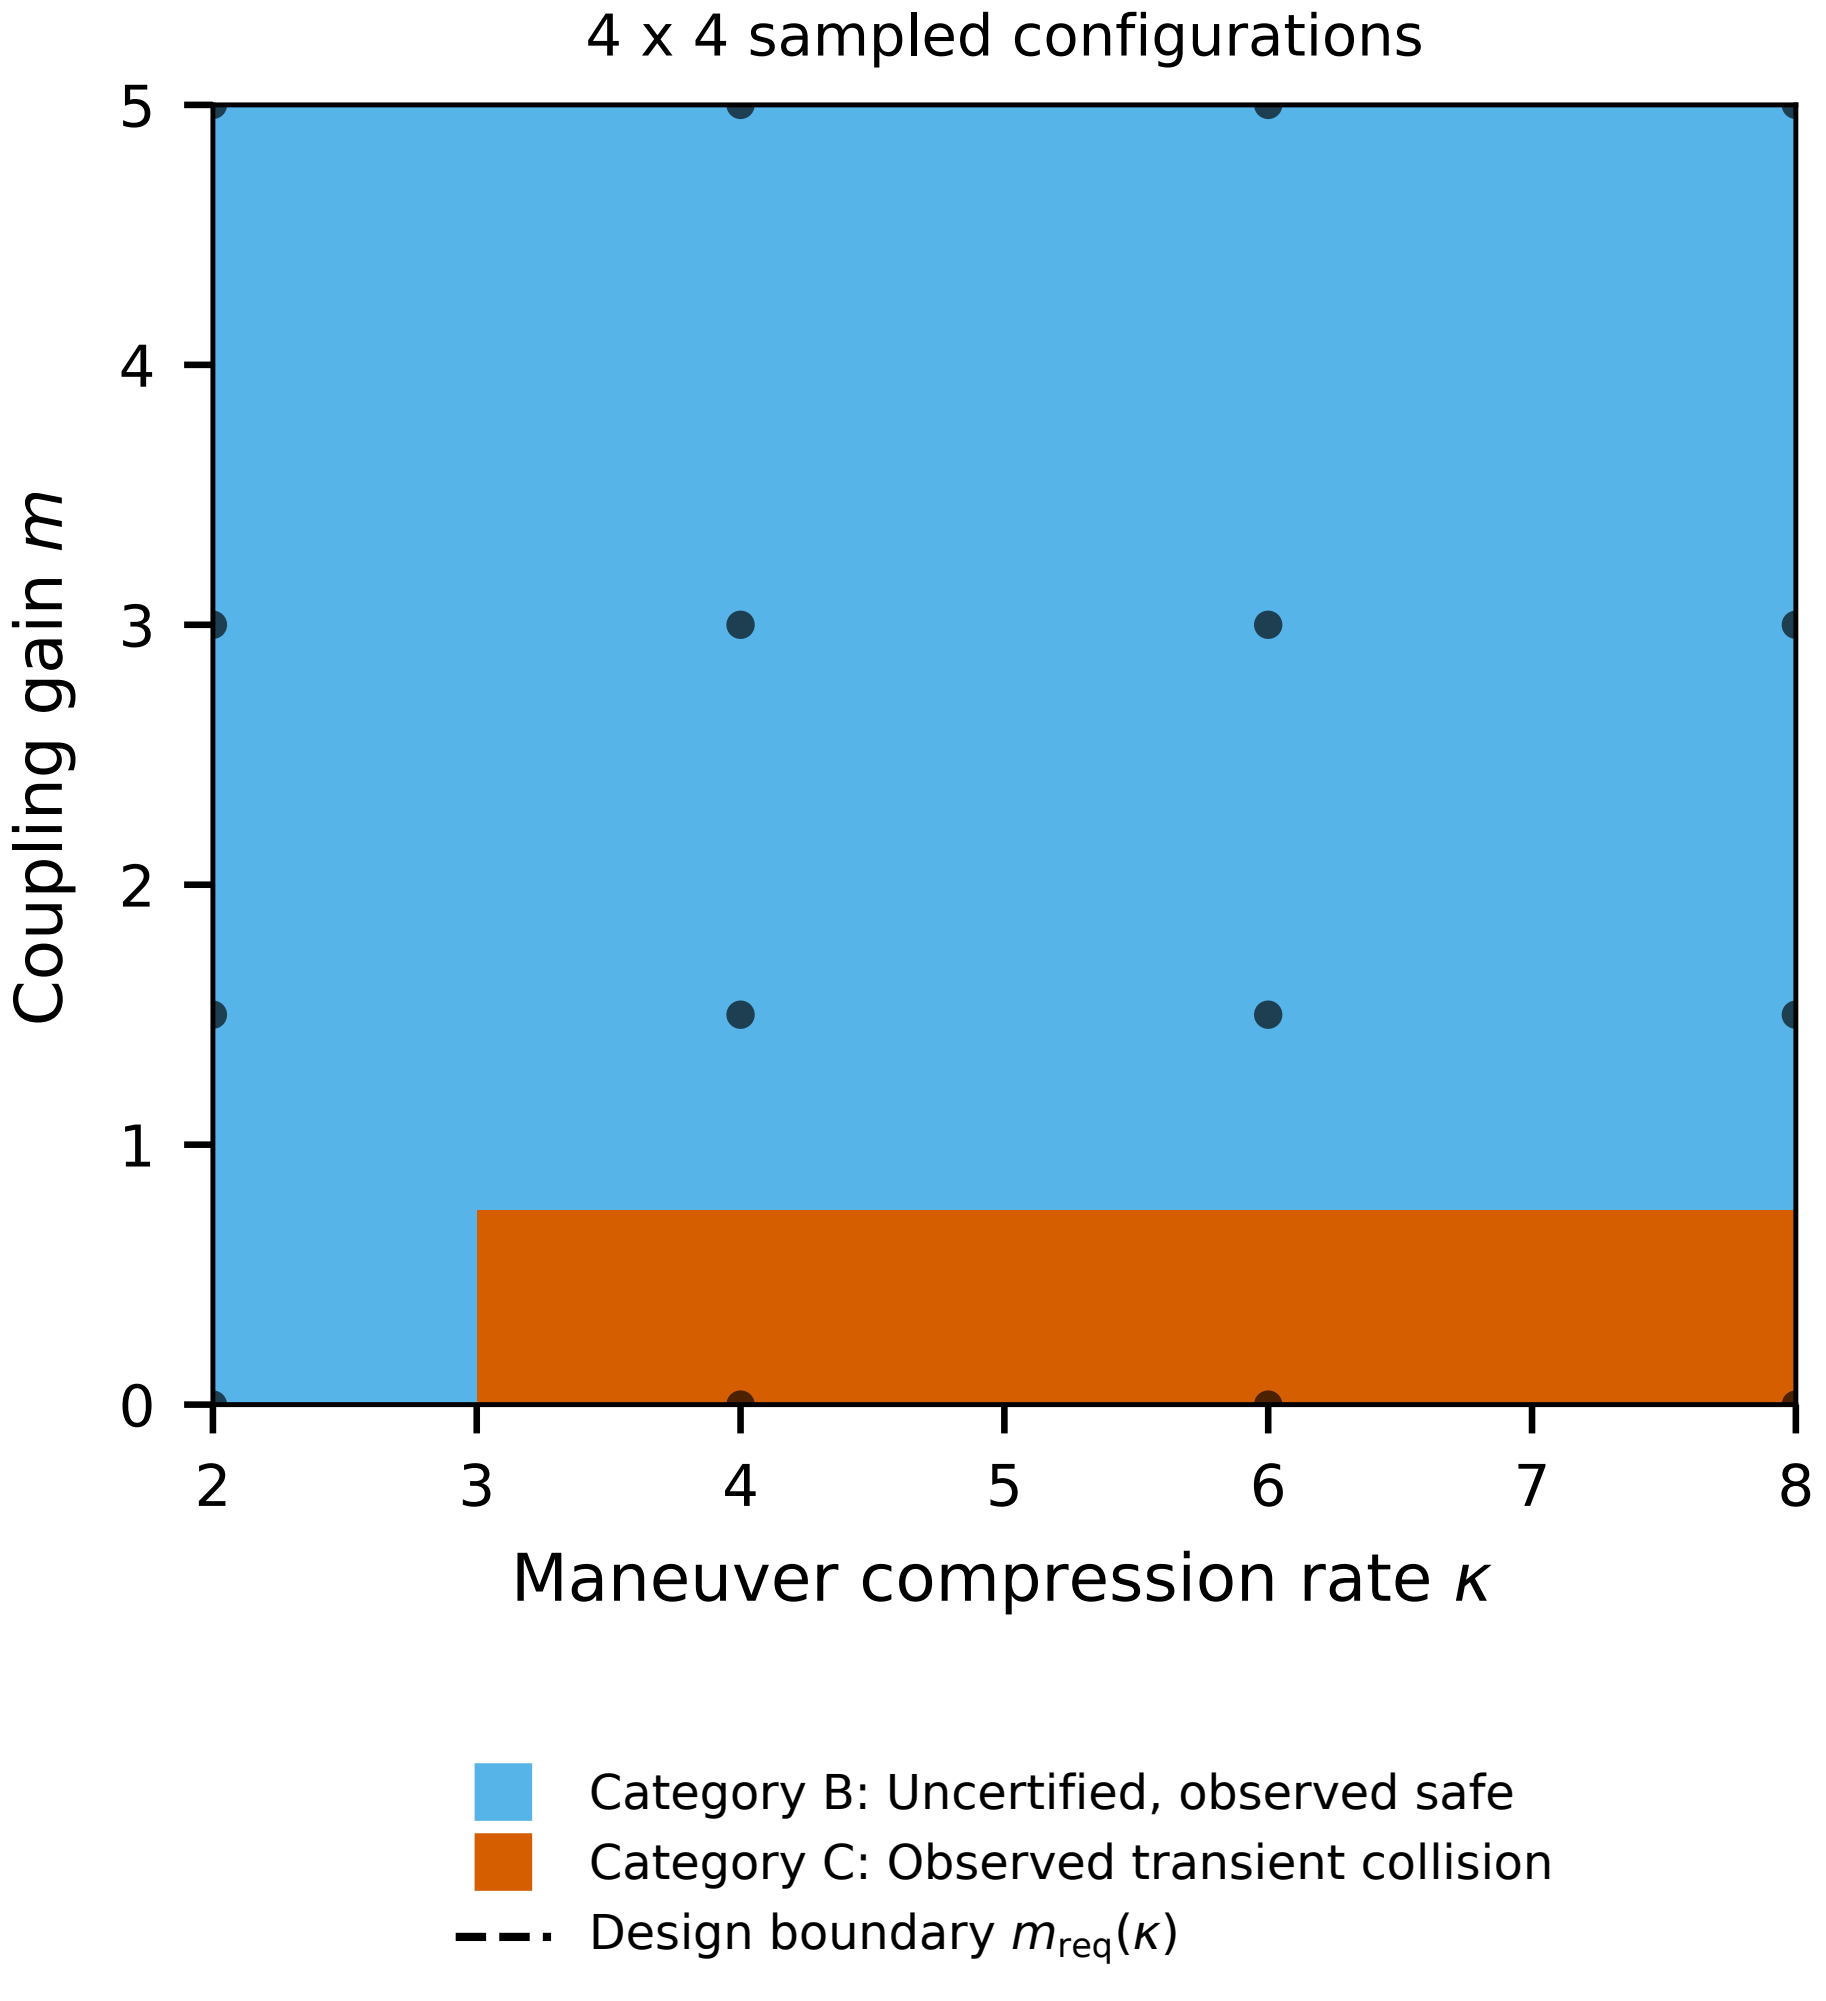
4 x 4 sampled configurations
Coupling gain m
Maneuver compression rate κ
0
1
2
3
4
5
2
3
4
5
6
7
8
Category B: Uncertified, observed safe
Category C: Observed transient collision
Design boundary $m_{\mathrm{req}}(\kappa)$