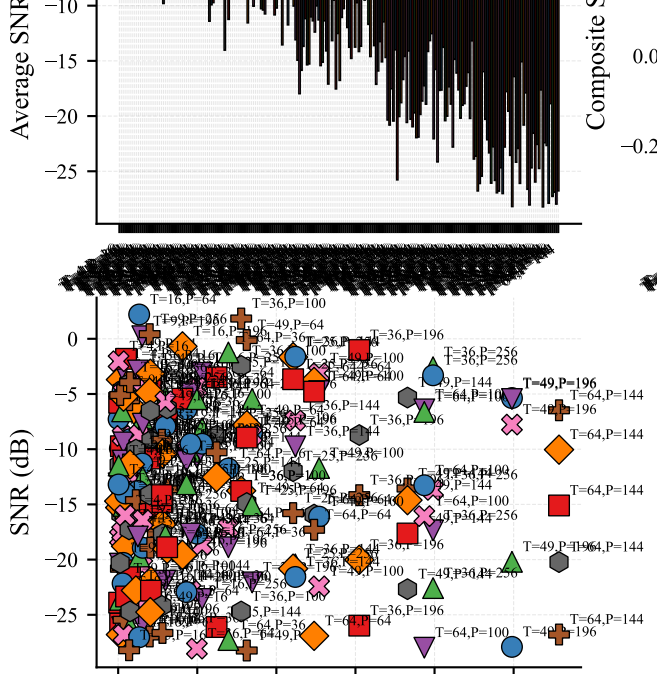


Validated by: [Wu & Zhang, IEEE Trans. Wireless Commun. 2020]; [Dally & Towles, Morgan Kaufmann 2004]

Area (m²)	Tiles	Pixels	SNR (dB)	Score
25	4	16	-7.3	0.34
25	4	36	-5.8	0.29
25	4	64	-4.5	0.25
25	4	100	-3.7	0.22
25	4	144	-2.7	0.20
25	4	196	-4.4	0.15
25	4	256	-4.9	0.12
25	9	16	-9.4	0.24
25	9	36	-4.7	0.23
25	9	64	-1.8	0.21
25	9	100	-5.5	0.12
25	9	144	-6.6	0.07
25	9	196	0.2	0.14
25	9	256	0.4	0.12
25	16	16	-4.9	0.24
25	16	36	-4.0	0.18
25	16	64	2.2	0.21
25	16	100	-3.7	0.09
25	16	144	-5.3	0.04
25	16	196	-0.7	0.08
25	16	256	-3.1	0.03
25	25	16	-5.6	0.19
25	25	36	-3.8	0.14
25	25	64	-9.8	0.01
25	25	100	-6.4	0.02
25	25	144	-3.5	0.03
25	25	196	-5.4	-0.01
25	25	256	-1.7	0.03
25	36	16	-2.9	0.20
25	36	36	-7.1	0.07
25	36	64	-4.4	0.05
25	36	100	-2.5	0.05
25	36	144	-1.6	0.04
25	36	196	-1.0	0.03
25	36	256	-2.6	0.00
25	49	16	-3.2	0.16
25	49	36	-4.9	0.07
25	49	64	-0.1	0.09
25	49	100	-3.1	0.02
25	49	144	-5.3	-0.02
25	49	196	-5.4	-0.04
25	64	16	-7.5	0.08
25	64	36	-1.2	0.10
25	64	64	-3.9	0.02
25	64	100	-6.4	-0.03
25	64	144	-6.5	-0.05
50	4	16	-2.0	0.41
50	4	36	-11.4	0.21
50	4	64	-9.9	0.18
50	4	100	-9.7	0.14
50	4	144	-6.6	0.15
50	4	196	-5.2	0.14
50	4	256	-9.3	0.06
50	9	16	-5.1	0.30
50	9	36	-8.8	0.17
50	9	64	-14.0	0.05
50	9	100	-9.1	0.07
50	9	144	-11.3	0.01
50	9	196	-7.2	0.04
50	9	256	-4.9	0.05
50	16	16	-9.4	0.18
50	16	36	-3.9	0.18
50	16	64	-8.7	0.07
50	16	100	-9.2	0.02
50	16	144	-7.9	0.01
50	16	196	-5.4	0.02
50	16	256	-8.1	-0.03
50	25	16	-11.6	0.11
50	25	36	-7.7	0.09
50	25	64	-9.1	0.02
50	25	100	-10.1	-0.03
50	25	144	-8.8	-0.04
50	25	196	-8.5	-0.05
50	25	256	-3.7	0.00
50	36	16	-10.3	0.10
50	36	36	-10.4	0.02
50	36	64	-10.8	-0.03
50	36	100	1.8	0.11
50	36	144	-7.4	-0.04
50	36	196	-8.7	-0.07
50	36	256	-3.3	-0.01
50	49	16	-10.8	0.06
50	49	36	-10.2	-0.00
50	49	64	-7.8	-0.01
50	49	100	-4.7	0.00
50	49	144	-13.6	-0.13
50	49	196	-7.8	-0.07
50	64	16	-6.3	0.10
50	64	36	-11.7	-0.04
50	64	64	-4.8	0.01
50	64	100	-6.6	-0.04
50	64	144	-10.0	-0.10
100	4	16	-13.1	0.26
100	4	36	-15.0	0.16
100	4	64	-18.0	0.07
100	4	100	-15.9	0.06
100	4	144	-13.7	0.05
100	4	196	-11.2	0.06
100	4	256	-15.4	-0.02
100	9	16	-15.3	0.16
100	9	36	-11.0	0.14
100	9	64	-11.4	0.08
100	9	100	-12.4	0.03
100	9	144	-10.0	0.03
100	9	196	-11.3	-0.02
100	9	256	-15.4	-0.09
100	16	16	-15.1	0.11
100	16	36	-11.4	0.08
100	16	64	-14.1	-0.01
100	16	144	-17.1	-0.09
100	16	196	-5.7	0.04
100	16	256	-13.2	-0.09
100	16	256	-9.5	-0.05
100	25	16	-17.6	0.03
100	25	36	-12.5	0.03
100	25	64	-16.8	-0.08
100	25	100	-11.1	-0.04
100	25	144	-10.3	-0.06
100	25	196	-8.7	-0.05
100	25	256	-12.0	-0.11
100	36	16	-13.8	0.05
100	36	36	-14.8	-0.04
100	36	64	-5.5	0.04
100	36	100	-13.8	-0.10
100	36	144	-9.7	-0.07
100	36	196	-14.2	-0.14
100	36	256	-13.7	-0.15
100	49	16	-6.5	0.12
100	49	36	-9.5	0.01
100	49	64	-8.9	-0.03
100	49	100	-11.7	-0.09
100	49	144	-14.6	-0.15
100	49	196	-5.5	-0.04
100	64	16	-13.6	-0.00
100	64	36	-17.1	-0.12
100	64	64	-15.9	-0.14
100	64	100	-13.3	-0.13
100	64	144	-15.1	-0.16
200	4	16	-11.5	0.29
200	4	36	-14.7	0.17
200	4	64	-20.4	0.04
200	4	100	-20.8	-0.01
200	4	144	-17.5	0.00
200	4	196	-20.5	-0.07
200	4	256	-14.0	-0.01
200	9	16	-25.8	0.02
200	9	36	-20.1	0.02
200	9	64	-18.8	-0.02
200	9	100	-16.7	-0.03
200	9	144	-14.6	-0.03
200	9	196	-20.6	-0.14
200	9	256	-14.1	-0.08
200	16	16	-20.3	0.04
200	16	36	-21.0	-0.04
200	16	64	-19.7	-0.08
200	16	100	-22.0	-0.15
200	16	144	-21.9	-0.18
200	16	196	-19.9	-0.17
200	16	256	-18.6	-0.17
200	25	16	-17.3	0.04
200	25	36	-18.9	-0.06
200	25	64	-14.2	-0.05
200	25	100	-13.2	-0.07
200	25	144	-12.5	-0.09
200	25	196	-22.1	-0.23
200	25	256	-15.8	-0.16
200	36	16	-24.2	-0.09
200	36	36	-17.7	-0.08
200	36	64	-17.7	-0.12
200	36	100	-13.8	-0.10
200	36	144	-20.4	-0.21
200	36	196	-20.0	-0.22
200	36	256	-17.4	-0.19
200	49	16	-18.9	-0.05
200	49	36	-22.8	-0.17
200	49	64	-14.9	-0.11
200	49	100	-16.1	-0.15
200	49	144	-17.6	-0.19
200	49	196	-20.2	-0.23
200	64	16	-19.0	-0.07
200	64	36	-18.9	-0.14
200	64	64	-17.3	-0.16
200	64	100	-16.1	-0.16
200	64	144	-20.2	-0.23
400	4	16	-13.2	0.26
400	4	36	-23.9	0.04
400	4	64	-23.6	-0.01
400	4	100	-26.8	-0.09
400	4	144	-26.1	-0.11
400	4	196	-25.5	-0.13
400	4	256	-16.0	-0.03
400	9	16	-20.3	0.09
400	9	36	-22.2	-0.01
400	9	64	-23.3	-0.08
400	9	100	-26.1	-0.15
400	9	144	-22.8	-0.14
400	9	196	-25.8	-0.21
400	9	256	-27.0	-0.25
400	16	16	-26.8	-0.05
400	16	36	-24.7	-0.09
400	16	64	-27.0	-0.18
400	16	100	-22.8	-0.16
400	16	144	-17.8	-0.12
400	16	196	-19.6	-0.17
400	16	256	-23.6	-0.24
400	25	16	-28.2	-0.11
400	25	36	-16.4	-0.03
400	25	64	-24.2	-0.18
400	25	100	-22.9	-0.20
400	25	144	-26.1	-0.27
400	25	196	-15.1	-0.14
400	25	256	-20.8	-0.23
400	36	16	-17.9	-0.00
400	36	36	-26.6	-0.20
400	36	64	-28.1	-0.26
400	36	100	-24.7	-0.25
400	36	144	-21.6	-0.23
400	36	196	-26.0	-0.30
400	36	256	-22.6	-0.26
400	49	16	-24.8	-0.12
400	49	36	-17.6	-0.10
400	49	64	-28.2	-0.29
400	49	100	-22.4	-0.24
400	49	144	-22.7	-0.26
400	49	196	-27.9	-0.34
400	64	16	-18.9	-0.07
400	64	36	-27.3	-0.25
400	64	64	-26.9	-0.29
400	64	100	-28.0	-0.32
400	64	144	-26.8	-0.32