


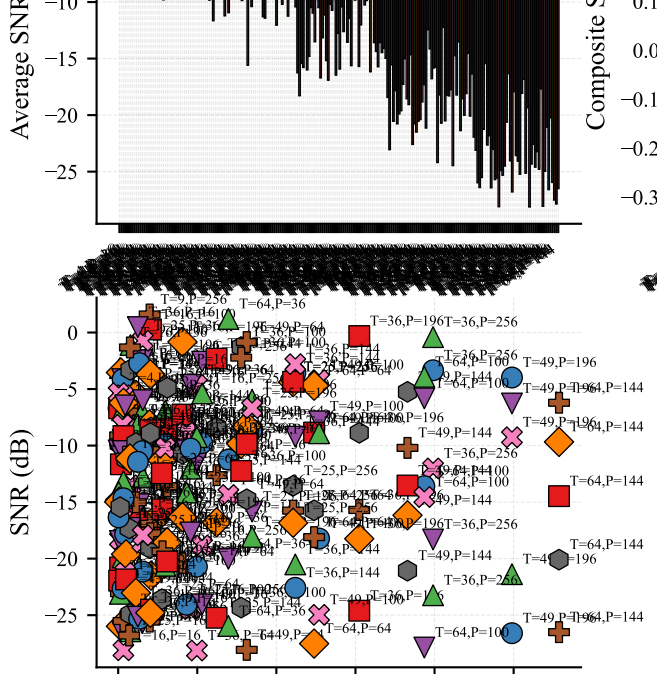

Validated by: [Wu & Zhang, IEEE Trans. Wireless Commun. 2020]; [Dailly & Towles, Morgan Kaufmann 2004]

Area (m²)	Tiles	Pixels	SNR (dB)	Score
25	4	16	-6.7	0.35
25	4	36	-6.7	0.27
25	4	64	-3.1	0.27
25	4	100	-3.5	0.22
25	4	144	-4.1	0.18
25	4	196	-4.1	0.15
25	4	256	-5.0	0.12
25	9	16	-9.6	0.24
25	9	36	-4.1	0.23
25	9	64	-7.0	0.14
25	9	100	-1.1	0.18
25	9	144	-5.5	0.09
25	9	196	-2.4	0.10
25	9	256	1.6	0.13
25	16	16	-5.5	0.24
25	16	36	-3.3	0.19
25	16	64	-2.7	0.15
25	16	100	0.3	0.15
25	16	144	-6.9	0.02
25	16	196	-0.8	0.08
25	16	256	-2.6	0.04
25	25	16	-7.0	0.18
25	25	36	-0.7	0.18
25	25	64	-9.8	0.01
25	25	100	-7.4	0.01
25	25	144	-2.3	0.05
25	25	196	-5.9	-0.02
25	25	256	-4.4	-0.01
25	36	16	0.5	0.24
25	36	36	-9.1	0.04
25	36	64	-4.6	0.05
25	36	100	-1.3	0.06
25	36	144	-3.6	0.01
25	36	196	-0.3	0.04
25	36	256	-0.4	0.03
25	49	16	-3.7	0.16
25	49	36	-4.6	0.07
25	49	64	-0.8	0.08
25	49	100	-4.2	0.01
25	49	144	-5.2	-0.02
25	49	196	-4.0	-0.02
25	64	16	-8.5	0.07
25	64	36	1.2	0.13
25	64	64	-4.7	0.01
25	64	100	-5.8	-0.03
25	64	144	-6.2	-0.05
50	4	16	-5.4	0.37
50	4	36	-9.8	0.23
50	4	64	-9.7	0.18
50	4	100	-11.7	0.11
50	4	144	-6.9	0.14
50	4	196	-6.2	0.12
50	4	256	-6.4	0.10
50	9	16	-9.1	0.24
50	9	36	-8.2	0.18
50	9	64	-11.2	0.09
50	9	100	-9.5	0.07
50	9	144	-10.9	0.01
50	9	196	-7.1	0.04
50	9	256	-8.1	0.00
50	16	16	-9.2	0.19
50	16	36	-1.3	0.22
50	16	64	-8.6	0.07
50	16	100	-8.4	0.03
50	16	144	-9.9	-0.02
50	16	196	-7.3	-0.01
50	16	256	-5.4	0.00
50	25	16	-15.6	0.06
50	25	36	-6.0	0.11
50	25	64	-10.4	0.00
50	25	100	-8.8	-0.01
50	25	144	-8.4	-0.03
50	25	196	-8.6	-0.05
50	25	256	-4.4	-0.01
50	36	16	-8.2	0.13
50	36	36	-11.3	0.01
50	36	64	-11.4	-0.04
50	36	100	-2.2	0.05
50	36	144	-2.8	0.02
50	36	196	-8.9	-0.07
50	36	256	-3.3	-0.01
50	49	16	-8.6	0.09
50	49	36	-12.0	-0.03
50	49	64	-8.3	-0.02
50	49	100	-7.9	-0.04
50	49	144	-10.2	-0.09
50	49	196	-9.3	-0.09
50	64	16	-4.9	0.12
50	64	36	-11.2	-0.04
50	64	64	-8.8	-0.04
50	64	100	-3.9	-0.00
50	64	144	-9.7	-0.09
100	4	16	-10.4	0.30
100	4	36	-16.3	0.15
100	4	64	-18.3	0.07
100	4	100	-15.4	0.06
100	4	144	-15.8	0.02
100	4	196	-9.2	0.08
100	4	256	-16.0	-0.03
100	9	16	-14.8	0.17
100	9	36	-10.5	0.15
100	9	64	-11.0	0.09
100	9	100	-13.5	0.01
100	9	144	-9.8	0.03
100	9	196	-10.5	-0.01
100	9	256	-16.7	-0.11
100	16	16	-13.2	0.13
100	16	36	-11.1	0.09
100	16	64	-15.2	-0.02
100	16	144	-10.2	-0.08
100	16	196	-10.7	-0.05
100	16	256	-9.8	-0.06
100	25	16	-16.5	0.05
100	25	36	-12.8	0.02
100	25	64	-15.9	-0.07
100	25	100	-10.4	-0.03
100	25	144	-12.6	-0.09
100	25	196	-6.7	-0.03
100	25	256	-13.6	-0.13
100	36	16	-11.4	0.08
100	36	36	-15.6	-0.05
100	36	64	-9.3	-0.01
100	36	100	-9.8	-0.05
100	36	144	-9.2	-0.06
100	36	196	-15.7	-0.16
100	36	256	-12.0	-0.12
100	49	16	-8.9	0.09
100	49	36	-10.3	-0.00
100	49	64	-9.9	-0.04
100	49	100	-8.9	-0.05
100	49	144	-16.2	-0.17
100	49	196	-6.3	-0.05
100	64	16	-13.6	0.00
100	64	36	-14.4	-0.08
100	64	64	-15.7	-0.14
100	64	100	-13.6	-0.13
100	64	144	-14.5	-0.16
200	4	16	-14.1	0.25
200	4	36	-15.0	0.16
200	4	64	-18.4	0.06
200	4	100	-23.1	-0.04
200	4	144	-15.6	0.03
200	4	196	-20.5	-0.07
200	4	256	-17.8	-0.06
200	9	16	-20.8	0.09
200	9	36	-19.9	0.02
200	9	64	-19.6	-0.03
200	9	100	-17.3	-0.04
200	9	144	-15.0	-0.04
200	9	196	-18.6	-0.11
200	9	256	-19.1	-0.14
200	16	16	-14.7	0.11
200	16	36	-22.6	-0.07
200	16	64	-20.8	-0.10
200	16	100	-21.5	-0.14
200	16	144	-20.5	-0.16
200	16	196	-20.4	-0.18
200	16	256	-18.8	-0.18
200	25	16	-17.3	0.04
200	25	36	-21.1	-0.09
200	25	64	-12.5	-0.02
200	25	100	-14.2	-0.08
200	25	144	-16.8	-0.14
200	25	196	-15.8	-0.15
200	25	256	-15.8	-0.16
200	36	16	-24.2	-0.09
200	36	36	-18.2	-0.08
200	36	64	-20.7	-0.16
200	36	100	-12.2	-0.08
200	36	144	-20.5	-0.21
200	36	196	-18.2	-0.20
200	36	256	-18.3	-0.21
200	49	16	-17.8	-0.03
200	49	36	-24.5	-0.19
200	49	64	-14.7	-0.11
200	49	100	-18.2	-0.18
200	49	144	-13.5	-0.13
200	49	196	-21.4	-0.25
200	64	16	-18.5	-0.07
200	64	36	-20.0	-0.15
200	64	64	-18.1	-0.17
200	64	100	-14.6	-0.14
200	64	144	-20.1	-0.23
400	4	16	-16.4	0.22
400	4	36	-21.9	0.07
400	4	64	-23.1	0.00
400	4	100	-26.0	-0.08
400	4	144	-26.4	-0.12
400	4	196	-25.5	-0.13
400	4	256	-21.3	-0.10
400	9	16	-15.4	0.16
400	9	36	-22.6	-0.01
400	9	64	-21.8	-0.06
400	9	100	-26.4	-0.16
400	9	144	-23.0	-0.15
400	9	196	-25.7	-0.21
400	9	256	-25.6	-0.23
400	16	16	-28.1	-0.06
400	16	36	-24.9	-0.10
400	16	64	-25.3	-0.16
400	16	100	-24.5	-0.18
400	16	144	-20.6	-0.16
400	16	196	-16.3	-0.13
400	16	256	-24.0	-0.25
400	25	16	-26.8	-0.09
400	25	36	-17.9	-0.05
400	25	64	-23.6	-0.17
400	25	100	-24.1	-0.21
400	25	144	-25.2	-0.25
400	25	196	-18.1	-0.18
400	25	256	-16.8	-0.17
400	36	16	-25.1	-0.10
400	36	36	-19.4	-0.10
400	36	64	-28.1	-0.26
400	36	100	-24.3	-0.24
400	36	144	-22.6	-0.24
400	36	196	-24.6	-0.28
400	36	256	-23.2	-0.27
400	49	16	-24.8	-0.12
400	49	36	-17.7	-0.10
400	49	64	-28.1	-0.28
400	49	100	-25.0	-0.27
400	49	144	-21.1	-0.23
400	49	196	-26.6	-0.32
400	64	16	-20.2	-0.09
400	64	36	-26.0	-0.23
400	64	64	-27.5	-0.29
400	64	100	-27.9	-0.32
400	64	144	-26.5	-0.32