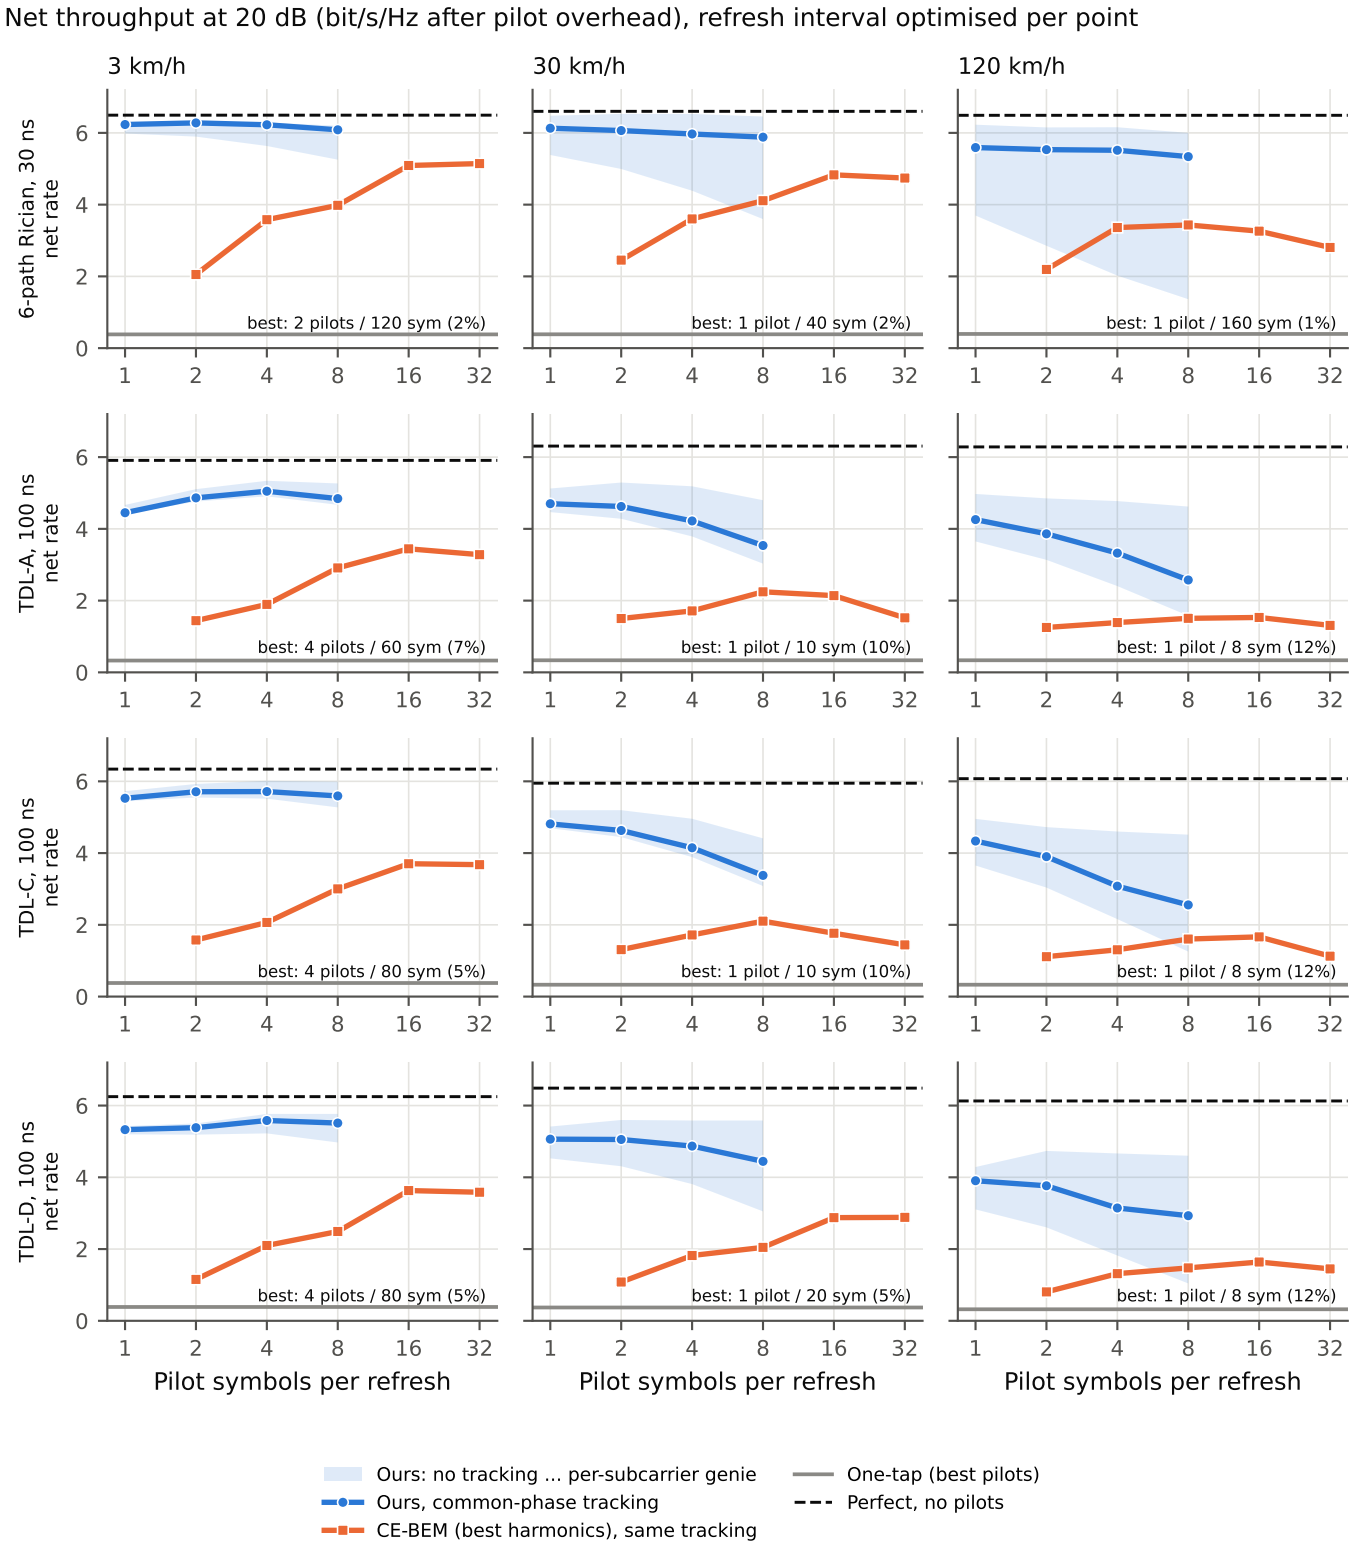
Net throughput at 20 dB (bit/s/Hz after pilot overhead), refresh interval optimised per point
3 km/h
30 km/h
120 km/h
6-path Rician, 30 ns
TDL-A, 100 ns
TDL-C, 100 ns
TDL-D, 100 ns
net rate
best: 2 pilots / 120 sym (2%)
best: 1 pilot / 40 sym (2%)
best: 1 pilot / 160 sym (1%)
best: 4 pilots / 60 sym (7%)
best: 1 pilot / 10 sym (10%)
best: 1 pilot / 8 sym (12%)
best: 4 pilots / 80 sym (5%)
best: 1 pilot / 10 sym (10%)
best: 1 pilot / 8 sym (12%)
best: 4 pilots / 80 sym (5%)
best: 1 pilot / 20 sym (5%)
best: 1 pilot / 8 sym (12%)
Pilot symbols per refresh
Ours: no tracking ... per-subcarrier genie
Ours, common-phase tracking
CE-BEM (best harmonics), same tracking
One-tap (best pilots)
Perfect, no pilots