action TESA

Boilo®

BOILING WATER PROOF HDF BOARD



BORN TOUGH

Boilo is an Ultimate Solution
For the Modern Age Restrooms

GLOBALLY FIRST

www.actiontesa.com

WHY BOILO?

BOILING WATER PROOF FR(FIRE RETARDANT) HDF (HIGH DENSITY FIBER)BOARD

TESA Boilo®

BOILING WATER PROOF HDF BOARD

Why BOILO is a great option?

There are several surfaces such as metal, stone, ply and engineering wood which may be considered as option to modern Toilet Cubicles but if you looking for best-of-the-breed product among all, great attractive colors, and still value for money proposition, BOILO BWP, FR HDF Board is ideal. Boilo has density over 1000+ kg/m3 and it is highly recommended for interior application having wet conditions, high load bearing surfaces, high traffic and high temperature areas.

- **Great product for all seasons**

BOILO boards are Suitable for all environmental conditions, these boards are also resistant to fungus, making them ideal for damp spaces.

- **Choose from wide range of Colors**

By selecting right colors same cubicle space will look considerably large. Choose from wide range of fantastic shades and contact us if you need some specific color (made to order)*.

Available in - 8mm, 12mm,16mm & 18mm (Plain & Prelam) Size: 8 x 4ft (8 x 6 ft available in 12mm only)

OTHER APPLICATION AREA : • Restroom Toilet Cubicle •Thermal Insulation •Load Bearing Area (Decking / Warehouse Shelves/ Staircases) •Container Floor •Truck Floor •Bus Body Floor •Bathroom Partition •Wall Paneling •Furniture •Fixtures •Modular Kitchen •Wardrobes •Moist Area Furniture

ANTIVIRO™
KILLS 99.9% VIRUS, BACTERIA & OTHER MICROBES

BOILO 25 YEARS WARRANTY
BWP HDF BOARD



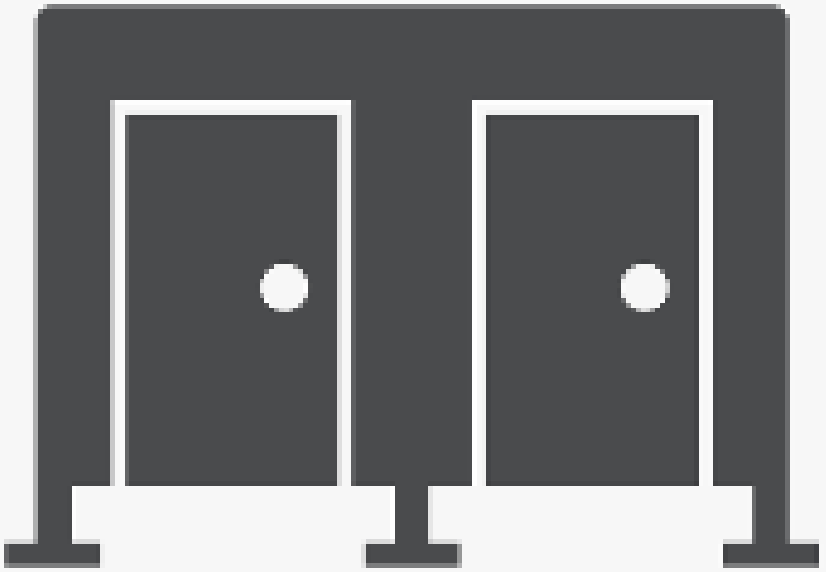
- BOILING WATER PROOF BOARD
- FIRE RETARDANT
- TERMITE & BORER PROOF
- HIGH IMPACT RESISTANCE

TERMITE PROOF · BORER PROOF · FIRE RETARDANT · FUNGAL RESISTANCE · HIGHER DENSITY · TOUGHER THAN PLYWOOD · BIO degradable

FIRE RETARDANT

TESTED AS PER STANDARD OF FIRE RETARDANT PLYWOOD (IS 5509 : 2000)

FLAME RETARDANT 3 TIMES MORE AGAINST PASSING PARAMETER OF IS 5509 : 2000 - FIRE RETARDANT PLYWOOD










COLOR PLUS

CHOOSE FROM WIDE RANGE OF FANTASTIC COLORS. DEMAND COLORS OF YOUR CHOICE*

*Make to Order

TESA Boilo®

BOILING WATER PROOF HDF BOARD

							
Super White 1101 - SD	**Everest White** 1102 - SD	**Frosty White** 1103 - SD	**Silver Grey** 1104 - SD	**Slate Grey** 1105 - SD	**Black** 1106 - SD	**Cardinal Red** 1107 - SD	**Marigold Yellow** 1108 - SD
							
Electric Blue 1109 - SD	**Ivory** 1111 - SD	**Gothic Grey** 1113 - SD	**Orange** 1116 - SD	**Parrot Green** 1119 - SD	**Hutch Pink** 1126 - SD	**Mocha Brown** 1134 - SD	**Olive** 1135 - SD
							
Hong Kong Blue 1138 - SD	**Irish Blue** 1140 - SD	**Night Grey** 1141 - SD	**Pebble Beach** 1142 - SD	**Coral Pink** 1143 - SD	**Chocolate** 1144 - SD		

Technical Details

FIRE RETARDANT PROPERTIES **BOILO-BWP FR HDF v/s FR PLYWOOD**

Sl. No.	Test Description	UOM	Test Standard	Fire Retardant Plywood - IS-5509 Requirement	BOILO BWP HDF Results
	Thickness	mm		**19mm**	**18mm**
1.	Flammability	Minutes	IS 1734- Part 3	30	100
2.	Flame penetration	Minutes	IS 1734- Part 3	45	51
3.	Rate of burning	Minutes	IS 1734- Part 3	20	39

TEST REPORT BOILO 12MM AS PER IS 15061:2002		
Horizontal burning	Specified values $\leq$ 100	Actual test result - 0 not ignite (very good result)
Vertical burning	Specified values $\leq$ 100	Actual test result - 0 not ignite (very good result)
Melting behavior	No flaming or melting	Remark - Confirm passing

TEST STANDARDS: ASTM E84-2020 (TESTED SPECTRO ANALYTICAL LAB LTD.)		
Index	**Class 1 or A requirement**	**TESA Boilo result**
Flame spread Index	0 - 25 (lower is better)	6.37
Smoke development	450 Maximum (lower is better)	77.57
Remarks	Passing	Passing Class 1 or A

BOILO-BWP FR (FIRE RETARDANT) HDF BOARD (FEATURES AND BENEFITS)

Feature	Benefits
BWP	○ Boiling Water Proof
Fire retardant property confirming to **IS:5509** Standard	○ Fire retardant
Borer	○ Borer Proof
Termite proof (1 Year testing Certificate from IPRITI)	○ Termite proof
High Density	○ High strength ○ It makes Multii Dmensional routing and carving possible
Smooth Surface	○ Best suited for painting and polishing
High surface density of 1180kg/ m^3	○ High impact resistance ○ High resistance to dents ○ High paint coverage due to less surface absorption ○ Lower glue consumption for post-lamination ○ Low flammability – (FR properties)
Uniform Thickness	Bubble free Pre-Lamination & Post-lamination
Homogenous structure- across the grain and along the grain	No core gaps or core overlaps
Grey color	Can be polished- used as coloured HDF
Available in 8'X6' (12mm)	Reduction in cutting wastage
High rigidity (6 times higher than requirement of structural plywood **IS:10701**)	High Load bearing strength
High bonding strength	○ Long Lasting product ○ High internal bonding and excellent screw holding/ withdrawal strength which remain unaffected even in boiling water
High Dimensional Stability	○ Much lower water absorption ○ Lesser thickness swelling ○ Much lower linear expansion

The Action Group, one of the India's biggest business house came to existence in the early 70's under the capable leadership of Shri Mange Ram Aggarwal. The Group began its operations by stepping into footwear industry. And today, it has well defined diversified presence in the Electronics, Real Estate, Chemicals, Flex Manufacturing, Healthcare, Coal Mining and Panel Products Industries.

The Panel Products Range:

CARB certified MDF & Particle Boards

MDF, Particle & HDHMR Boards

High Gloss UV & Acrylic Boards

Embossed HDF Boards

BOILO - Boiling Water Proof FR HDF Board

Abraze -Highly Scratch Resistant Board

HDF Laminated Flooring & HDHMR Flooring Accessories

Doors



action TESA®

PANELS | FLOORING | DOORS

Manufactured & Marketed By :-

Balaji Action Buildwell Pvt. Ltd.

Corporate Office: G-11, Udyog Nagar, Peeragarhi, Main Rohtak Road, New Delhi-110041

Customer Care Service:

1800 309 07 07

customerservices@actiontesa.com