

A hug of warmth wrapped in nature.

V-Guard Air Source Heat Pump Water Heaters.



Air Source Heat Pump Water Heater (ASHPWH)

Running hot water, in recent times has become a necessity more than a luxury. An Air Source Heat Pump Water Heater (ASHPWH) from V-Guard is the go-to solution for readily available hot water. Our ASHPWH's work even when the outside temperature is way less than zero degrees Celsius. They are energy efficient and save on fuel cost as the heat is absorbed from the atmosphere. Like every other product from V-Guard, the smallest detail has been looked at to make sure that only the best product reaches our valuable customer.

V-Guard Air source heat pump water heaters are usually said to be "fit and forget" units. If you have bought a V-Guard heat pump water heater, rest assured, you have bought arguably the best product in its category with best in class features in safety, efficiency, power saving and environment protection.



Lower
operating cost



MODBUS
Communication



Environmental
friendly refrigerant



Less
Maintenance



Silent
Operation






Features

- MODBUS Communication: V-Guard Heat Pump Water Heater use MODBUS communication protocol. It can be easily integrated into most existing building management systems without hassle.
- V-Guard ASHPWHs use High efficiency Tube in shell heat ex-changer that ensures high Coefficient of performance (COP) which equates to lower operating cost.
- Environmental friendly refrigerant: our heat pumps only use environment friendly R410A refrigerant.
- V-Guard ASHPWHs provide constant temperature output ranging from 55-60 Degree Celsius.
- V-Guard ASHPWHs come integrated with high pressure protection systems that ensures safety.
- Automatic defrost ensures that maintenance and cleaning intervals do not come too often.
- V-Guard ASHPWHs operates on vast range of temperature variation ranging from -15 to 43 Degree Celsius.
- V-Guard ASHPWHs comes equipped with a water resistant body. They are coated with an anti-corrosive coating that ensures long lasting maintenance free operation.
- Our systems are easy to install and backed by hassle free service.

Working Principle - Heat Pump Water Heater:


The heat pump makes use of a refrigerant for its operation. The low temperature refrigerant absorbs free heat from the atmospheric air in the evaporator is compressed by a highly efficient electrical compressor to a high- temperature and high-pressure vapour refrigerant. This vapour is then passed through a heat exchanger (condenser) to transfer the heat to the water in the storage tank to produce hot water. The refrigerant then passes through an expansion valve and it goes back to the evaporator for absorbing the free heat from the atmospheric air again and the cycle is repeated.

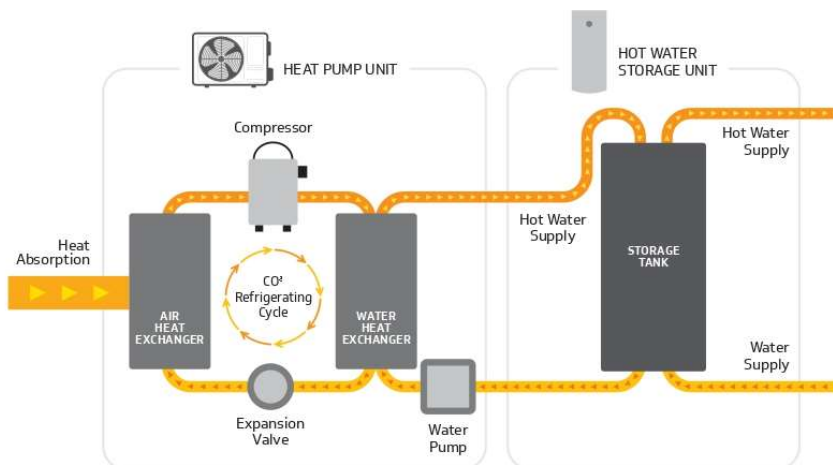

Working of Heat Pump Water Heater in a SWH System as a Backup

- In a SWH system, heat pump acts as a backup heating even when there is cloudy weather or the solar radiations available is very scarce
- There are separate pipes provided in the solar water heater storage tank for circulating cold water from SWH tank to Heat pump and hot water from Heat Pump to SWH tank
- To integrate the heat pump in the SWH system, it requires a hot water circulation pump and a digital temperature controller with sensors
- Whenever the temperature in the SWH drops below the set value, the pump starts circulating the water through the heat pump and heats it up to the set temperature. On reaching the set temperature, the pump stops automatically after sensing the temperature in the storage tank

Heat Pump Water Heater Installation Diagram

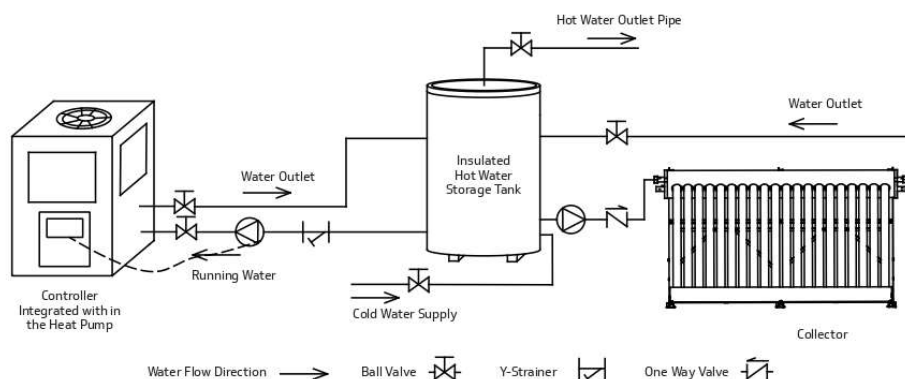

Applications


- Residential Bungalow
- Apartments
- Hospitals
- Swimming Pool
- Industrial Applications
- Hotels / Resorts



Specifications

V-Guard HP Model Name	V-HP 1 T	V-HP 1.5 T	V-HP 2 T	V-HP 3 T	V-HP 5 T	V-HP 6 T	V-HP 10 T	V-HP 15 T
Power Supply	220V/50Hz	220V/50Hz	220V/50Hz	220V/50Hz	380V/3/50Hz	380V/3/50Hz	380V/3/50Hz	380V/3/50Hz
Heating Capacity at Air 25°C/20°C, Water Temperature from 20°C to 55°C								
Heating Capacity (kW)	4.1	6.2	8.6	12.0	21	28	43	55
Power Input (kW)	0.97	1.46	2.03	2.82	4.9	6.5	9.9	12.6
COP	4.21	4.26	4.24	4.25	4.29	4.28	4.34	4.36
Max Power Input (kW)	1.45	2.01	2.75	3.35	6.9	9.2	13.2	16.8
Max Current (A)	6.5	9.1	12.5	15.2	12.3	16.4	13.2	31.5
Rated Hot Water (L/h)	100	150	200	300	515	690	1050	1380
Refrigerant	R410a	R410a	R410a	R410a	R410a	R410a	R410a	R410a
Expansion Valve	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic
Air Flow Direction	Horizontal	Horizontal	Horizontal	Horizontal	Vertical	Vertical	Vertical	Vertical
Wilo Water Pump	RS-15/6			RS-25/8	PUN-402EH		PUN-750EH	
Water Pressure Drop (kPa)	35	35	40	45	50	50	50	55
Net Dimensions(L*W*H) (mm)	936×385×550		1011×420×614	986×420×798	755×695×1000	755×695×1000	1417×755×1000	995×990×1785
Working Temperature Range (°C)	-15~43	-15~43	-15~43	-15~43	-15~43	-15~43	-15~43	-15~43
Noise (dB)	47	49	52	53	≤60	≤60	≤65	≤65
Net Weight (Kg)	50	54	68	74	160	185	259	305
Water connection(mm)	20	20	20	20	25	25	32	40
Warranty	2 Year	2 Year	2 Year	2 Year	2 Year	2 Year	2 Year	2 Year

Heating Cost Comparison

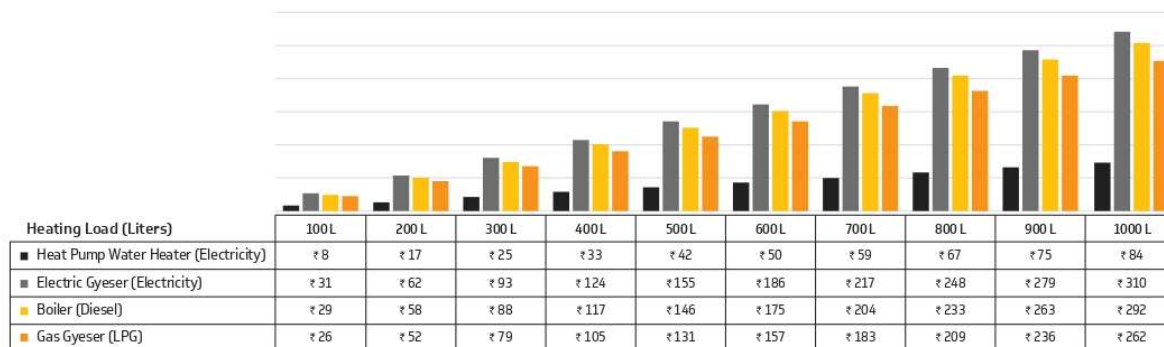

Reg. Add: - Flat No.2, Suryaprakash Apt, Parijat Nagar, Near Shrimat Darbar Misal, Nashik-422222.

Mob: - +91-9689881369, Landline No: - 0253-4018239 E-Mail: - sales@avegatasta.com/priyank@avegatasta.com

Web: - www.avegatasta.com GST: - 27ABDFA2928B1ZW

Proposal No. AVG/VHP/013/2026-27

Date: 25th May 2026

To,

Kind Attn : Mr Pratik Patil

Address : Nashik

Project : Service Apartment

Subject: - Techno Commercial Proposal for Commercial Heat Pump & Tank

Respected Sir,

We V-Guard Industries Ltd. regard to introduce our solve as manufacture ro major electrical appliances manufacturer in India. We manufacture Voltage Stabilizer, wiring cables, electric pumps, electric motors, geysers, solar water heaters, electric fan and UPS etc. Our systems are recognized for quality, long life, assured performance, as aesthetics and efficient service back-up.

Heat Pump is our voluntary product from V-Guard, the brand that has always given the best in quality, technology, performance and service. V-Guard heat pumps are manufactured at Coimbatore (TN), are made from high quality components sourced from international reputed suppliers. We save as substantial amount on electricity bill and other fuels by making it a worthy investment for a life time.

We appreciate your concern on environment by planning to install solar water heater. We always believe that, this kind of initiation will contribute to save nature for future. We feel proud to present our techno-commercial proposal for your reputed project. We are looking forward to join hands together to save our environment for next generation through this project.

**On Behalf of,
V-Guard Industries Ltd.**

About V-Guard Industries:

V-Guard Industries was founded in 1977 by Kochouseph Chittilappilly as a small voltage stabilizer manufacturing unit with a vision and a capital of Rs.1Lakhn borrowed from his father. He soon established V- Guard Industries as a house hold name.

V-Guard became the synonym for voltage stabilizers across India. The company soo next end edtheir range of products to including Solar Water Heater. Kochouseph Chittilappilly also founded other establishments such as V Star-Indian manufacture of innerwear for men, kids & women, Wonder-la- achain of amusement parks in south India.

V-Guard continues to remain at the help through rigorousre search and development. R&D labs at Cochin and Coimbatore explore and reinvent existing products and design. R&D for electronic products and electric geysrs are carried out in Cochin while electro-mechanical products, electrical wires and solar water heaters are the strong point of the Coimbatore R&D lab. State of the art production centres ensure consistency and quality throughout the product range.

V-Guard Heat Pump: -

Are volutionary product from V-Guard the brand that has always given the best in quality, technology, performance and service. The V-Guard Heat pumps made from high quality components and comes with innovative technology. V-Guard Heat Pump back up Water Heater save as substantial amount of energy bill. Heat Pump water heater shavea COP (Coefficient of Performance) in srange of 3.96 to 3.57, meaning that if COP is 3.96, the heat energy produced by the heat pump is 3.96 times the electrical energy consumed.

Comparative Analysis of the Different Back Up Systems:

PARAMETERS	ELECTRIC WATER HEATING	HEAT PUMP WATER HEATING
Operating Cost (%)	100	22-26(COP 3.96 to 3.57)
Heating Time	2-3 hrs (multiple heating cycles)	2 hrs(multiple heating cycles)
Temperature of Hot Water	60 -70°C	55 °C
Climatic Constraints	None (works throughout the year)	None (works throughout the year)

Service helpline:

V-Guard will ensure the premium service with it strained technicians across pan India level.18001031300 is the toll –free number to register the service request. This help line is available from morning 9 am to7pm Monday to Saturday.

Commercial offer: For 2-Ton Heat Pump

Option- 1

Sr. No.	Description	Total Quantity	Amount	GST 18%	Total Amount
1	Heat Pump V Guard V-HP 2 T Heat Capacity -8.6kw, Rated Hot Water – 200 LPH Refrigerant – R410a Willo Water Pump – RS-15/6 Warranty – 2 Years	2 Nos.	2,68,185/-	48,273/-	3,16,358/-

Option- 2

Sr. No.	Description	Total Quantity	Amount	GST 18%	Total Amount
1	Heat Pump V Guard V-HP 5 T Heat Capacity -21kw, Rated Hot Water – 515 LPH Refrigerant – R410a Willo Water Pump – PUN-402EH Warranty – 2 Years	1 Nos.	2,92,021/-	52,564/-	3,44,585/-

Commercial offer: For Hot Water tank 1000 ltr

Pressurised Heat Pump Tank Options			
Model Name	HP-TANK 2000 4 PR-MSE	HP TANK 1000 PR-HE	HP-TANK 1000 4 PR-MSE
Tank Material	MS EPOXY	GI EPOXY	MS EPOXY
Insulation Material	Rockwool	Rockwool	Rockwool
Working Pressure	4 Bar	4 Bar	4 Bar
Tank Orientation	Vertical	Vertical	Vertical
Inlet & outlet Pipe size	2"	1.25"	1.5"
Full Tank Cylindrical Length, mm	2300.00	2400.00	2100.00
Full Tank Dia, mm	1450.00	1040.00	1150.00
Installation Area (Length x Width x Height),mm	1450 x 1450 x 2352	1040 x 1040 x 2550	1150 x 1150 x 2152
Shell Thickness, mm	4.00	3.00	4.00
End Dish Thickness, mm	5.00	5.00	5.00
Anode Provision	Yes, Provision with backup heater	Yes, Provision with backup heater	Yes, Provision with backup heater
No of Back up heater	3 kW X 3 No	3 kW X 3 No	3 kW X 3 No
Weight of Tank, Kg	350.00	410.00	235.00
Warranty	2 Years	5 Years	2 Years
Total Quantity	1	2	2
Amount (₹)	2,05,300/-	3,23,950/-	2,51,500/-
GST (₹)	36,954/-	58,312/-	45,270/-
Total Price (₹)	2,42,254/-	3,82,262/-	2,96,770/-

• V-Guard Industries Ltd. Scope of working includes: -

- Designing appropriate system, transportation up to site, Installation support under V-Guard Trained Technician from H.O.
- Warranty*as per company policy on Heat Pump & Tank.

Buyer Scope of Work:

- Buyer should supply cold storage OHT for Heat Pump
- Buyer Scop Unloading, Lifting, Plumbing material and Labour, of system at site.
- Buyer should do accessory cold and hot water piping from Heat Pump to Tank, Inlet & Outlet Line.
- If necessary, extra Support structure (fabrication) and grouting of HP are on Buyer's scope.

Reg. Add: - Flat No.2, Suryaprakash Apt, Parijat Nagar, Near Shrimat Darbar Misal, Nashik-422222.

Mob: - +91-9689881369, Landline No: - 0253-4018239 E-Mail: - sales@avegatasta.com/priyank@avegatasta.com

Web: - www.avegatasta.com GST: - 27ABDFA2928B1ZW

Commercial terms & conditions:

Price Basis:	FOB Project site.
Payment terms:	100 % Advance
Transportation & Delivery schedule:	Included in the offer. Within 15-25 days from the date of P.O.
Packing Forwarding, Transit Insurance:	Included in the offer.
Installation	Excluded in the offer In Buyer's Scope. (Installation support under V-Guard Trained Technician)
Unloading, Lifting, Cold & Hot water External plumbing:	Excluded in the offer In Buyer's Scope.
GST:	Applicable @18%. Included in the offer for Heat Pump
Offer Validity:	1 Month

We hope with this we will be able to serve you with the Trust. If any details required feel free to call us.

Regards,
For Avega Tasta Solution
Sushant Patil
9112225190