


# Microrprocessor\_Unit3

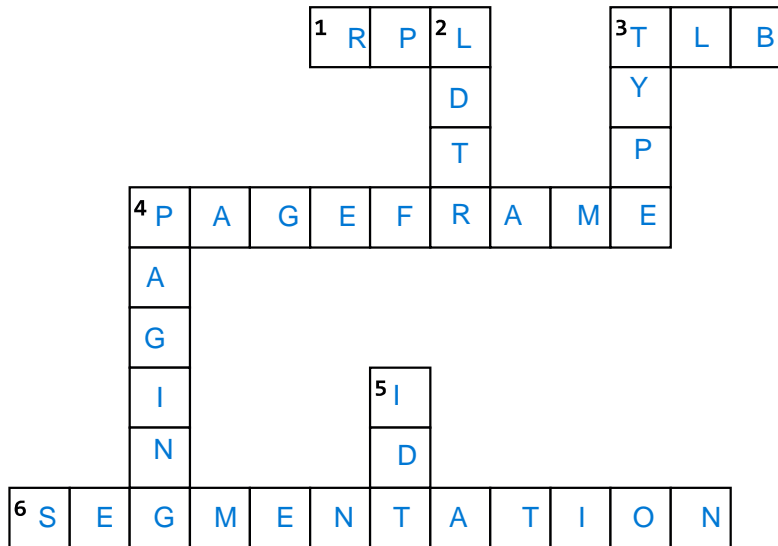

## Across

1. it is used to request the access the segment
3. what is use of control register DR6 & Dr7
4. It is a 4 KB unit of continious address of physical memory
6. it is aprocessof converting logical address to a linear address

## Down

2. 16 bit selector for the Local Descriptor
3. It indicate the type of segment in segment descriptoN
4. Less efficient use of memory with more fragmentation
5. It contains group of descriptors that define interrupts or exception handling routines