

V01 1

ES-2835-109V-XX-XXX Datasheet



This 2835 LED Light Source is a high performance energy efficient device which can handle high thermal and high driving current. The small package outline and high intensity make it an ideal choice for LED panel light, LED bulb light, LED tube light, backlighting and etc.

The White Power LED is available in the range of color temperature from 2700K to 7000K. This part has a foot print that is compatible to most of the same size LED in the market today.



FEATURES


- Available in Cool White, Neutral White and Warm White color
- ANSI-compatible chromaticity bins
- High luminous Intensity and high efficiency
- Compatible with reflow soldering process
- Low thermal resistance
- Long operation life
- Wide viewing angle at 120°
- Silicone encapsulation
- Environmental friendly, RoHS
 Compliance

APPLICATIONS


- Flat panel light
- Backlighting
- LED tube light
- LED bulb light
- Decorative and landscape lighting
- Signage and channel letter
- Reading lamp
- Decorating and entertainment lighting
- Architectural lighting



PACKAGE DIMENSIONS



RECOMMENDED SOLDER PAD DESIGN



- 1. All dimensions in millimeters.
- 2. Thickness tolerance of copper plate is ±0.02mm.
- 3. Thickness tolerance of product is ±0.05mm.
- 4. Tolerance is ±0.1mm unless otherwise noted.



ABSOLUTE MAXIMUM RATINGS

Item	Symbol	Absolute Maximum Rating	Unit
Forward current	l _F	120	mA
Peak Forward Current[1]	I _{FP}	200	mA
Reverse Voltage	V_{R}	5	V
Power Dissipation	Pd	1000	mW
Operating Temperature	T_{opr}	-40~+85	°C
Storage Temperature	T_{stg}	-40~+100	°C
Soldering Temperature	T_{sld}	Soldering: 260°C for 10 seco	onds
LED Junction Temperature	T_{j}	125	°C

IFP Conditions: Pulse Width ≤10msec. and Duty ≤1/10.


CHARACTERISTICS (Tj=25°C)

Item	Symbol	Condition	Min	Тур	Max	Unit
Forward Voltage	V_{F}	I ₌ =100mA	8.4		9.6	V
Viewing Angle	20 1/2	$I_F = 100 \text{mA}$		120		deg.
Luminous Flux	Фv	$I_F = 100 \text{mA}$	113		155	lm
Color Rendering Index	CRI	$I_F = 100 \text{mA}$	80			
Color Temperature	CCT	$I_F = 100 \text{mA}$	2700		7000	K
Thermal Resistance (Junction to Solder point	R _{th-js}	I _F =100mA		20		°C/W


- 1. Luminous flux is measured with an accuracy of ± 10%.
- 2. Chromaticity coordinate bins are measured with an accuracy of \pm 0.01.
- 3. CRI is measured with an accuracy of \pm 2.
- 4. Some color and CRI bins may have limited availability, please contact us before ordering.
- 5. All measurements were made under the standardized environment of Everstar



RELATIVE SPECTRAL POWER DISTRIBUTION (T_i=25°C)

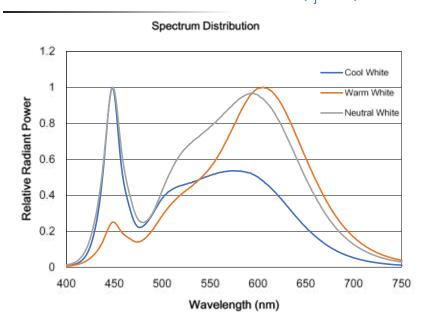


TYPICAL SPATIAL DISTRIBUTION

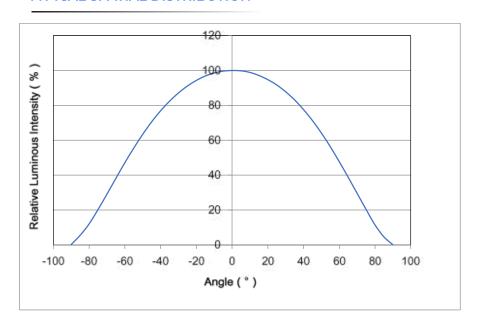





RELATIVE LUMINOUS FLUX VS.CURRENT (T_i=25°C)

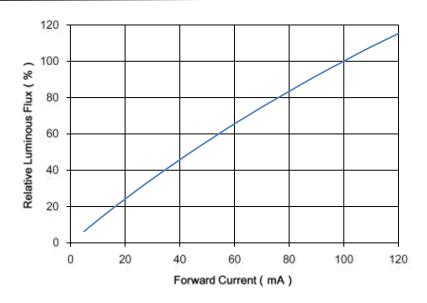


ELECTRICAL CHARACTERISTICS (T_i=25°C)



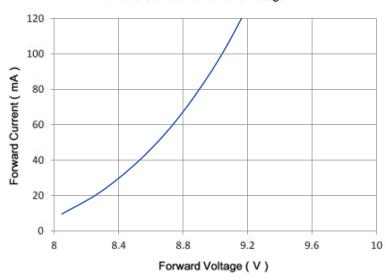




MAXIMUM CURRENT VS. AMBIENT TEMPERATURE

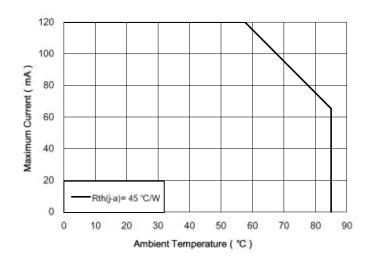

RELATIVE RADIANT FLUX VS. JUNCTION TEMPERATURE

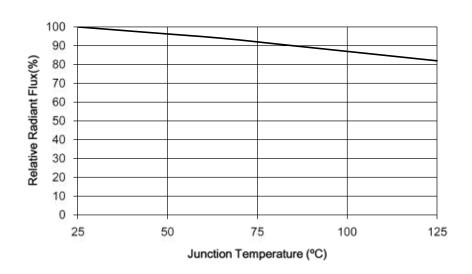



SORTING RANKS

(1) Luminous Flux (Tj=25°C)

Ordering code	Condition				Unit
Ordering code	Condition	L1	L2	L3	Offic
ES-2835-109V-XX-827		115-120	120-125	130-140	
ES-2835-109V-XX-830		118-122	122-128	140-150	
ES-2835-109V-XX-840	100mA	128-135	135-140	150-155	lm
ES-2835-109V-XX-860		128-135	135-140	150-155	
ES-2835-109V-XX-865		128-135	135-140	150-155	

(2) Forward Voltage (Tj=25°C)


Rank	Condition	Min.	Max.	Unit
V1	100mA	8.8	9.1	V
V2	100mA	9.1	9.3	V

- 1. 10% tolerance for luminous intensity may be caused by measurement inaccuracy.
- 2. Measurement Uncertainty of the Forward Voltage: ± 3%




(3) Chromaticity Bins

Part Number		ES2835-109V-XX-827					
Bin Code	CCT		Color Coordinates (X,Y)				
27.5	27.5 27007	Χ	0.4729	0.4521	0.4425	0.4627	
27-5 2700K	Υ	0.4254	0.4204	0.3951	0.3998		

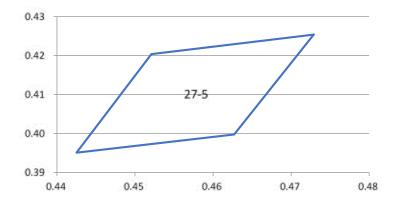


Part Number		ES2835-109V-XX-830				
Bin Code	ССТ	Color Coordinates (X,Y)				
20 F	3000K	Х	0.4504	0.4278	0.4196	0.4408
30-5	30-5 3000K	Υ	0.4198	0.4128	0.3873	0.3938

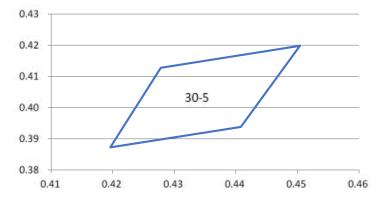




Part Number		ES-2835-109V-XX-840					
Bin Code	ССТ	Color Coordinates (X,Y)					
40 F	40.5	Χ	0.3967	0.3726	0.3682	0.3905	
40-5 4000K	Υ	0.4006	0.3855	0.3598	0.3733		




Part Number		ES-2835-109V-XX-860				
Bin Code	ССТ	Color Coordinates (X,Y)				
60.5	6000K	Χ	0.3296	0.3137	0.3151	0.3287
60-5	6000K	Υ	0.3527	0.3384	0.3177	0.3296





Part Number		ES-2835-109V-XX-865					6500K
Bin Code	ССТ		Color Coordinates (X,Y)				
CF F	6325-	Χ	0.3154	0.3086	0.3	096	0.3161
65-5	6746K	Υ	0.3345	0.3277	0.3	219	0.3284

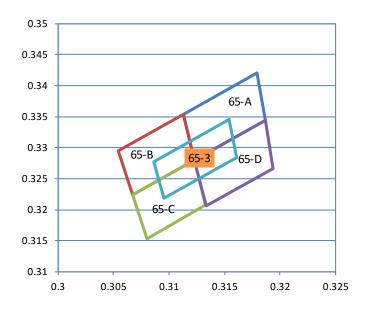




REFLOW SOLDERING CHARACTERISTICS


Preheating140°C~160°C±5°C, within 2 minutes.

Operatio heating: 260°C(Max.) within 10 seconds.(Max)

Gradual Cooling (Avoid quenching).

Lead sold	er	Lead-free solder		
Pre-heat	120-150°C	Pre-heat	150-200°C	
Pre-heat time	120 sec.Max.	Pre-heat time	120 sec.Max.	
Peak Temperature	240°C Max.	Peak Temperature	260°C Max.	
Soldering time condition	10 sec.Max.	Soldering time condition	10 sec.Max.	







Notes:

The encapsulated material of the LEDs is silicone. Therefore the LEDs have a soft surface on the top of package. The pressure to the top surface will be influence to the reliability of the LEDs. Precautions should be taken to avoid the strong pressure on the encapsulated part. So when using the picking up nozzle, the pressure on the silicone resin should be proper.



TAPE AND REEL

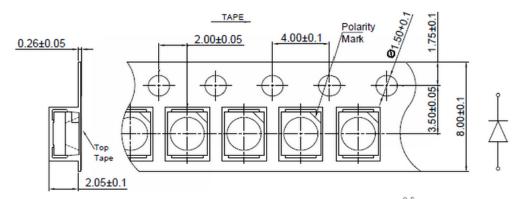


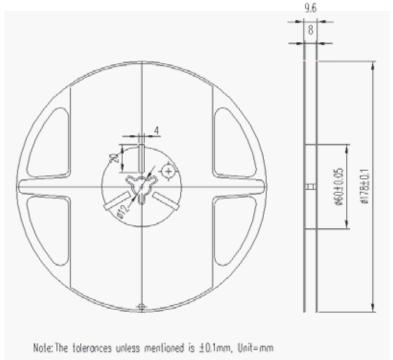


- (1) Quantity: 4,000pcs/Reel
- (2) Cumulative Tolerance: Cumulative Tolerance/10 pitches to be ±0.2mm
- (3) Adhesion Strength of Cover Tape: Adhesion strength to be 0.1-0.7N when the cover tape is turned off from the carrier tape at the angle of 10° to the carrier tape
- (4) Package: P/N, Manufacturing data Code No. and quantity to be indicated on a damp proof Package.




PACKAGING






moisture-proof bag



desiccant

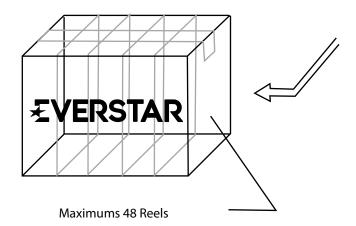



TAPE AND REEL

Test Items	Test Duration	Number of Damaged
Steady State Operating Life of High Temperature (HTOL) Ts=85°C, IF=Max	1000hrs	0/20
Steady State Operating Life of Low Temperature (LTOL) Ta=-40°C, IF=Max	1000hrs	0/20
Pulse Wet Operating Life of High Temperature (PWHTOL) 60°C/90%RH, IF30mins ON/30min OFF	500hrs	0/20
High Temperature Storage (HTS) °C 80°C	1000hrs	0/20
Low Temperature Storage (LTS) -40°C	1000hrs	0/20
Thermal Shock (TS) -45°C~125°C 30min dwell 20sec transfer	100cycles	0/20
Solder Resistance (SR) 265°C, 3X MSL	5sec	0/20
Solder Ability (SA) 245°C5sec, 95% coverage	5sec	0/11
Mechanical Shock (MS) 1500G 0.5msec pulse shock	Each6 axis	0/6
Random Vibration (RV) 6G RMS, 10-2000Hz, 10min	Per axis	0/6
Variable Vibration Frequency (VVF) 10-2000-10Hz, log or linear sweep rate, 20G for 1 min, 1.5mm each apply 3x per axis over	6hrs	0/6
Salt Spread (SS) 35°C, 30g/m2/day	48hrs	0/11

ltem	Symbol	Test Condition	Criteria fo Min.	r Judgment Max.
Forward	VF	IF=Typical Current		U.S.L x1.1
Luminous Flux	lm	IF=Typical Current	L.S.L x0.7	
CCX&CCY	x.y	IF=Typical Current		Shift<0.02



PRECAUTION FOR USE

(1) This device should not be used in any type of fluid such as water, oil, organic solvent, etc.

When washing is required, IPA should be used.

- (2) When the LEDs are illuminating, operating current should be decided after considering
- the ambient maximum temperature.
- (3) LEDs must be stored to maintain a clean atmosphere. If the LEDs are stored for 3months or more after being shipped from EVERSTAR, a sealed container with a nitrogen atmosphere should be used for storage.
- (4) The LEDs must be used within seven days after opening the moisture proof packing. Repack unused Products with anti-moisture packing, fold to close any opening and then store in a dry place.
- (5) The appearance and specifications of the product may be modified for improvement without notice.
- (6) This LED is sensitive to the static electricity and surge. It is recommended to use a wrist Band or antielectrostatic glove when handling the LEDs.
- (7) On manual soldering, a solder tip must be needed as grounded for usage. If over voltage which exceeds the absolute maximum rating is applied to LEDs, it will cause damage LEDs and result in destruction. Damaged LEDs will show some unusual characteristics such as leak current remarkably increase, turn-on voltage becomes lower and the LEDs get unlighted at low current.

