


Fibure Aramid Ripcord

Fibure Aramid Ripcord for ripping through steel armour or PE Jacket.

Fibure Aramid Ripcord is an aramid based, continuousfilament yarn designed specifically for fiber optic cableripcord application.

Fibure Ripcords are also available in water- blocking variant, designed with water blocking solution preventingthe water from travelling along the ripcord.


- Magnificent cutting properties
- Available in coloured variants
- High and uniform standard
- Available in WB versions

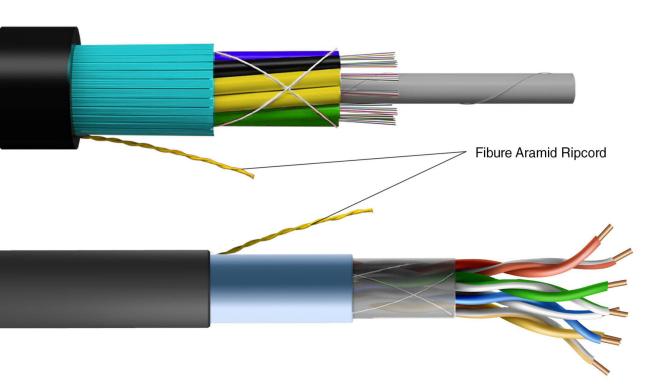

Properties	Meter weight	Runnage	Break Strength	Elongation
Test method	ASTM D 885	ASTM D 885	ASTM D 885	ASTM D 885
Unit	g/m	m/kg	N	%
1610 dTex				
Nom.	0.18	5556	255	2.5
Min.	0.16	5051	190	2.0
Max.	0.20	6173		3.0
3220 dTex				
Nom.	0.32	3125	515	2.5
Min.	0.30	2083	385	2.0
Max.	0.48	3289		3.0
1100 dTex				
Nom.	0.11		230	2.5
Min.	0.099		200	2.0
Max.	0.121			3.0

Packing Dimensions	Unit	Paper Tube	Paper Tube
Tube inner diameter	mm	94 ± 1	94 ± 1
Outer diameter	mm	220	220
Tube Length	mm	295	295
Traverse	mm	270	270

Packing Information

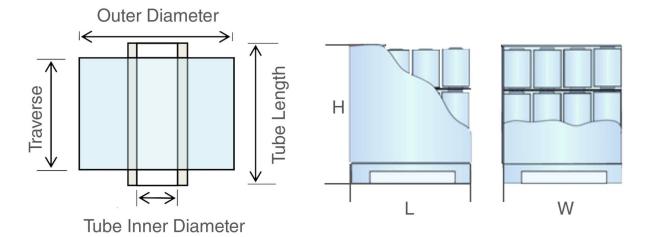

Mangalchand Tubes Pvt. Ltd. F-443, Road No. 13, Vishwakarma Industrial Area, Jaipur-302013, Rajasthan, India

email : cc@fibure.com Phone : +91-141-4086453



