



Architecture Diagrams

CoExist Alert

Code with Cisco | Silver Flag CSR Challenge | Mission 3: Human-Animal Coexistence


Architecture Read

These diagrams show the four views reviewers need most: system components, detection-to-warning sequence, escalation and ownership workflow, and runtime deployment. The PDF embeds Mermaid-rendered vector diagrams generated from the companion sources under `docs/diagrams/`.


Reading note

Field sensors are simulated in this proof of concept and are labeled that way in the UI and diagrams. Demo controls are a user-facing surface: they can trigger the ingest API for rehearsal, but they are not a field sensor node.


1 System Components

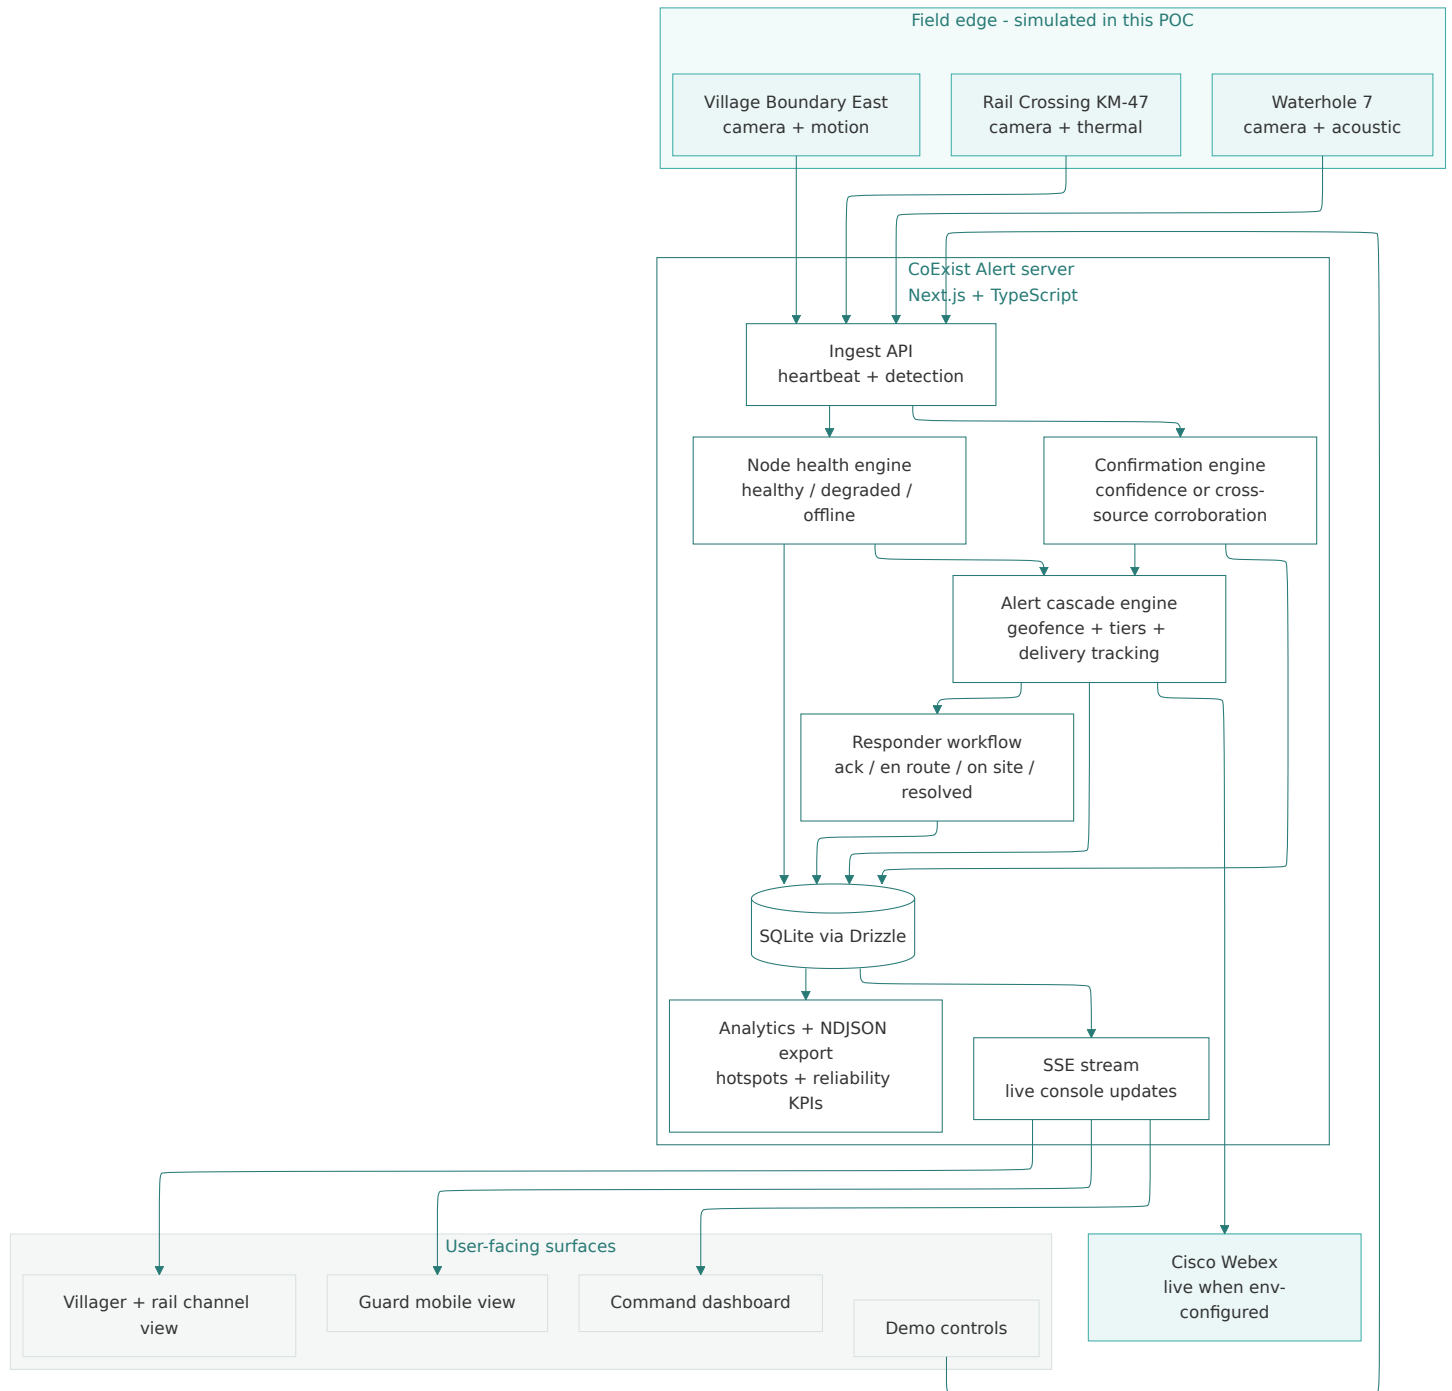

2 Detection To Warning Sequence

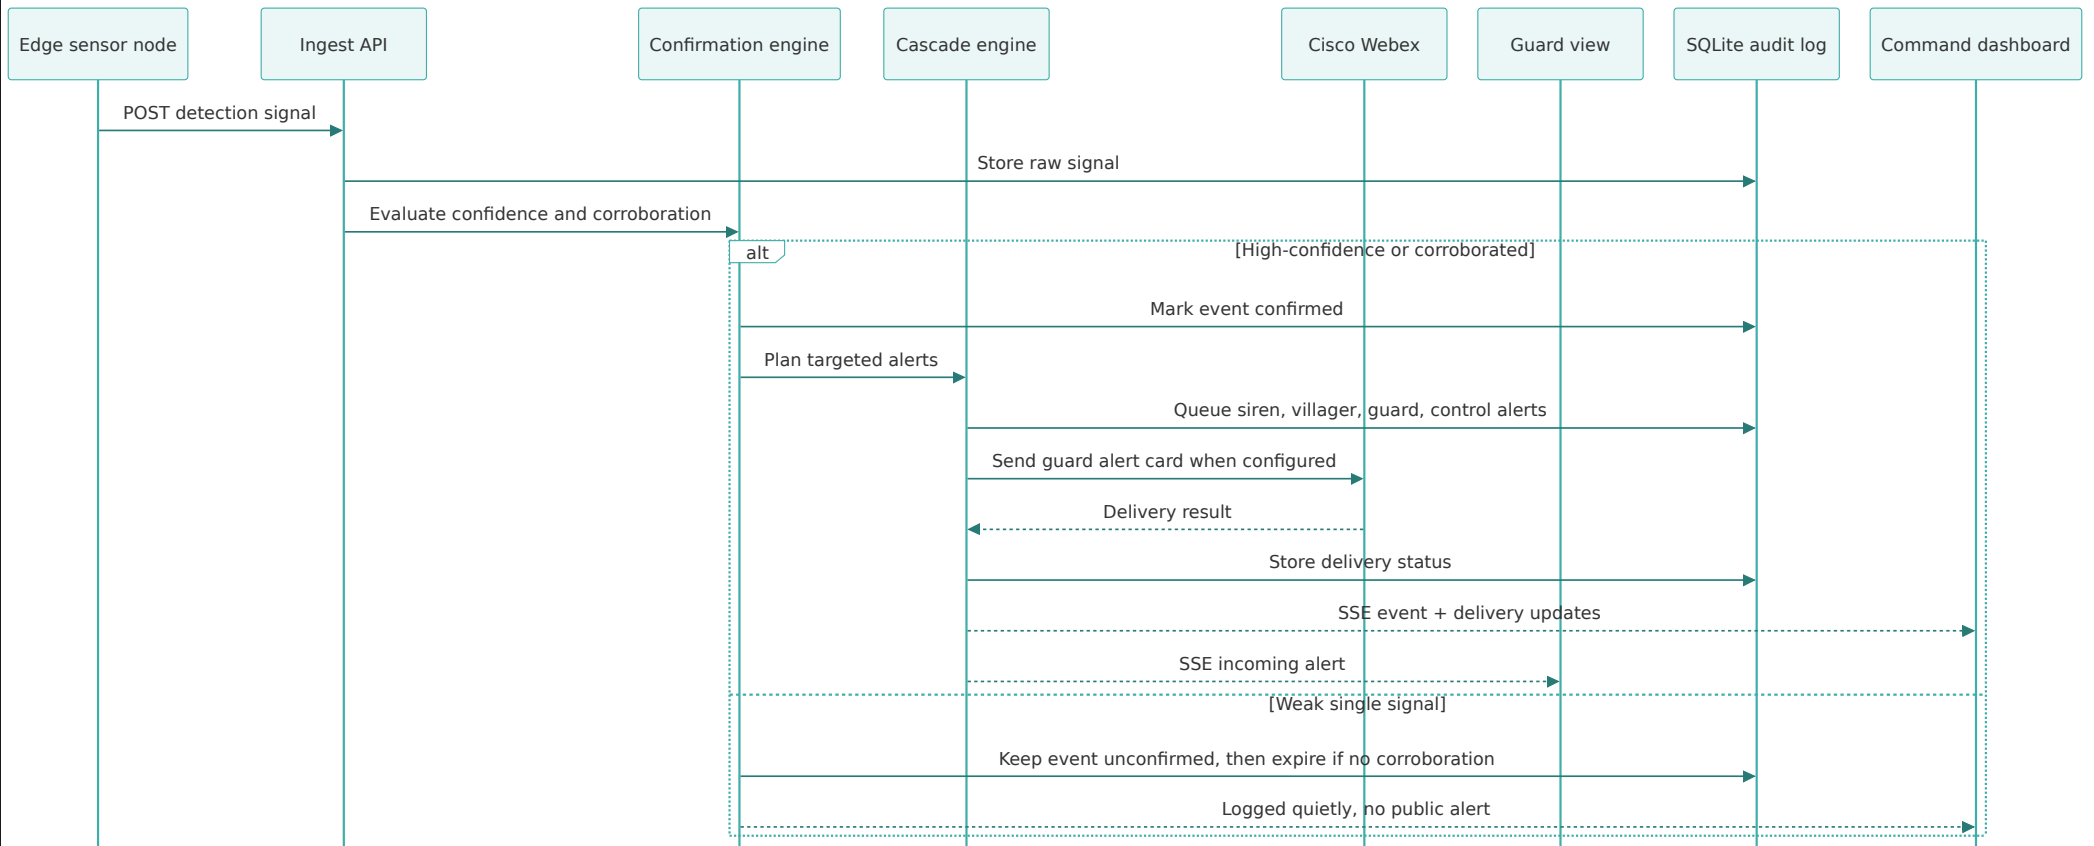


3 Escalation And Ownership Workflow

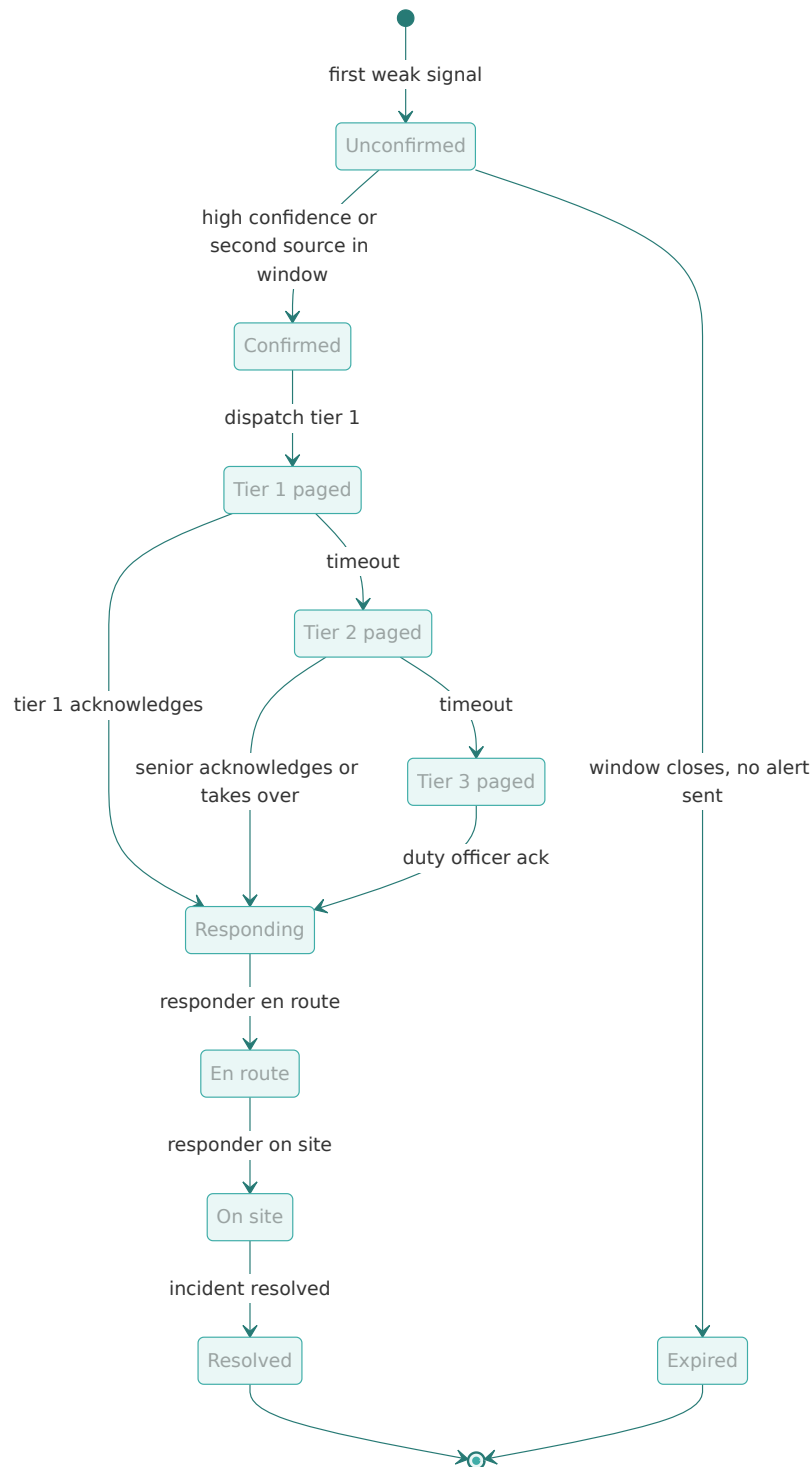

Ownership rule

The first acknowledging responder owns the incident. A paged senior can take over, but other responders cannot progress or resolve someone else's active incident.

4 Runtime And Deployment Flow

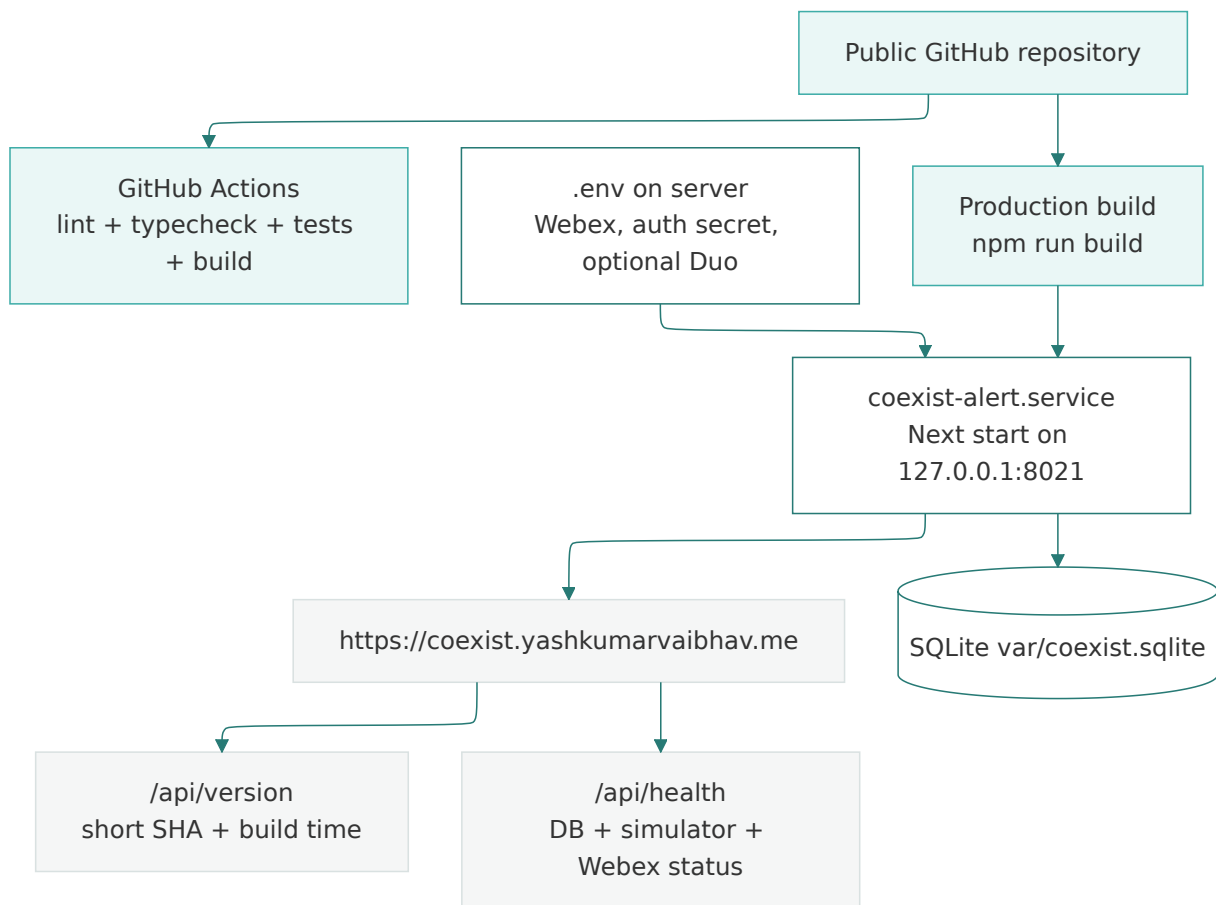

Deployment proof

The public deployment is verified by matching the latest Git commit with `/api/version`, plus `/api/health` for database, simulator, and Webex readiness.

5 Cisco Mapping Summary

Stage	Cisco product	Role in CoExist Alert
Sense	Meraki MV, MT, Cisco Spaces	Production edge detection and sensor payload shape.
Observe	ThousandEyes, Splunk	Health semantics, reliability analytics, event-log export.
Engage	Webex APIs	Live guard alert card and optional in-card acknowledgement.
Connect	Meraki MG, Catalyst	Remote backhaul narrative and link-quality model.
Secure	Duo, Secure Access, Umbrella	App auth/RBAC now; Duo step-up when configured; production access-control path.