



MANUFACTURER OF CONSTRUCTION **CHEMICALS**

Block Joining Mortar | Tile Adhesive | Epoxy Grouting | Water Proofing

www.confastchemicals.com



Confast Chemicals is one of the India's leading construction chemical company. And a manufacturer and supplier of speciality construction chemicals. The Strength of the company is its quality and reliability.

We offers a wide range of products in tile, stone adhesive and water proofing. We also train applicators and contractors to ensure the best result for clients.

We take pride in our products and believe in each of them with utmost confidence.



Our Products



Confast Blockfix

Is a ready to mix, Self curing cementitious mortar for mounting various blocks.



Confast TileSet 11 (CITE, Type 1)

Is a single component professional cement based powder adhesive.



Confast TileSet 22 (C2T, Type 2)

Cement-based, high performance, easy-to-use tile adhesive.



Confast TileSet 33 (C2TE, Type 3)

Is a high polymer modified, cement based wall and floor tile adhesive.



Confast TileSet 44 (C2TES1, Type 3)

Is a highly polymer modified. flexible wall and floor tile adhesive.



Confast Poxy 77

Is a epoxy based three component grout.



Confast SBR Latex+


SBR bonding additive that has been specially modified to improve the properties of render, screed and mortar mixes.



Confast Block Fix is a ready to mix, Self curing cementitious mortar for mounting and bonding, AAC blocks, CLC blocks, Hollow blocks, Concrete blocks and Bricks.

It is made from polymeric additives which help in providing mechanical bond and adhesion between block to block and block to surface.

Confast block fix is in compliance with C 1660 -09 ASTM standards (www.astm.org) Which is world's only standard for thin bed mortar for autoclaved aerated concrete masonry.

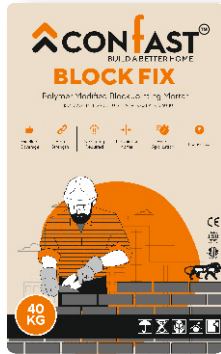

FEATURES :

- High Bonding Strength.
- Pre-Mixed and Ready to use.
- No Curing required.
- Improve adhesion.
- Easy to use.
- Minimum Wastage.



COVERAGE

- 140 to 160 Sq.ft. in 3MM for 4 Inch AAC Blocks.



SHELF LIFE

- 12 Month from the date of manufacturing.




PACK SIZE

- 40 Kg/ Bag



Confast Tileset -11 is single component professional cement based powder adhesive in grey with reduced slip and extended opening time for laying tiles of ceramic or stone on both internal and external floors and walls and also suitable for vitrified tiles on floor in internal areas.

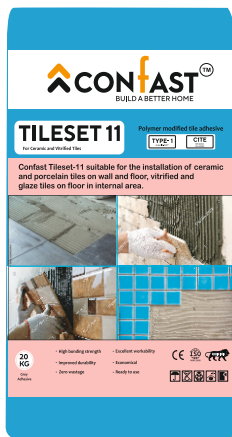

SUITABLE FOR :

- Ceramic & Porcelain tile on wall and floor.
- Vitrified tiles on floor.



RECOMMENDED SUBSTRATE

- On surfaces such as concrete, Screed, Plaster in internal area.



COVERAGE

- For a 3 MM bed thickness the coverage will be 4 - 4.5/ Sq. Mtr.



PACK SIZE

- 20 Kg/ Bag



CATEGORY

IS 15477 : 2019

TYPE 1

EN 12004

C1 T E



COLOR

- Grey



SHELF LIFE

- 12 Months from the date of manufacturing.



Confast Tileset-22 Cement-based, high performance, easy-to-use tile adhesive with reduced slip feature, extended open time, additional features and used for bonding Vitrified and natural stones on wall and floor, for both internal and external areas. Use for bonding on window sills/jams.



SUITABLE FOR :

- Medium size of vitrified tiles and Natural Stone.
- Suitable for Window sills / Jams.
- Internal & External on Wall and Floor.



RECOMMENDED SUBSTRATE

- On surfaces such as concrete, Screed, Plaster, Tile on Tile application in Internal and external area.



COVERAGE

- For a 3mm bed thickness the coverage will be 4-4.5/ sq.mtr.



CATEGORY

IS 15477 : 2019

TYPE 2



COLOR

- Grey ☐
- White ☐

EN 12004

C2 T



PACK SIZE

- 20 Kg/ Bag



SHELF LIFE

- 12 Months from the date of manufacturing.



Confast tileset 33 is a high polymer modified cement based wall and floor tile adhesive with increased adhesion and non - slip properties. Confast tileset 33 has been specially formulated for fixing a large variety of tiles such as ceramic porcelain. Vitrified and natural stone in internal as well as external areas.



SUITABLE FOR :

- Large format size of vitrified and glass mosaic tiles.
- Granite, Marble and all types of natural stones in internal and external areas.
- Suitable for hot temperature areas.
- Internal & External on Wall and Floor.



RECOMMENDED SUBSTRATE

- On surfaces such as concrete, Screed, Plaster, Tile on Tile application in Internal and external area.



COVERAGE

- For a 3mm bed thickness the coverage will be 4-4.5/ sq.mtr.



PACK SIZE

- 20 Kg/ Bag



CATEGORY

IS 15477 : 2019

TYPE 3

EN 12004

C2 T E



COLOR

- Grey ☐
- White ☐




SHELF LIFE

- 12 Months from the date of manufacturing.



Confast Tileset 44 is a highly modified flexible wall floor tile adhesive for fixing natural stone, Artificial stone various of substrates. Suitable for internal and external areas.

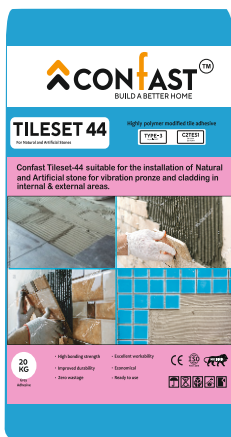

SUITABLE FOR :

- Large format size of vitrified and glass mosaic tiles.
- Granite, Marble and all types of natural stones in internal and external areas.
- Suitable for moderate vibration area hot temperature and cladding.



CATEGORY

IS 15477 : 2019

TYPE 3

EN 12004

C2 T E S1



RECOMMENDED SUBSTRATE

- On surfaces such as concrete, Screed, Plaster, gypsum plaster.
- Tile on Tile and moderate vibration area in internal and external areas.



SHELF LIFE

- 12 Months from the date of manufacturing.



COVERAGE

- For a 3mm bed thickness the coverage will be 4-4.5/ sq.mtr.



COLOR

- Grey ☐
- White ☐



PACK SIZE

- 20 Kg/ Bag



Confast poxy 77 is a three component based epoxy grout. It is a stain resistant, water resistant and high abrasion for wall and floor. It is suitable for like tiles, ceramic, glass mosaic, granite, etc...



SUITABLE FOR :

- Suitable for dry and wet area like kitchen, bathroom, swimming Pools.
- Commercial and industrial areas.
- Public restaurants, Laboratories & other chemical research facilities.



COVERAGE

- Its depend on the tile size, joint width and depth.

$$\frac{(L+B) \times D \times W \times 1.75}{(L+W) \times (B+W)} = \text{Kg/m}^2$$

L = Length of Tile (mm)

B = Breadth of Tile (mm)

W = Width of Joint (mm)

D = Depth of the Tile (mm)



SHELF LIFE

- 24 Months from the date of manufacturing.



COLOR

- 48 Color shades.




PACK SIZE

- 1 Kg , 5 Kg



Epoxy Grout Shade

	01 - Natural White		25 - Brick Red
	02 - Coral Red		26 - Scarlet
	03 - Pearl White		27 - Hemp
	04 - Silk		28 - Sable
	05 - Anti White		29 - Ivory
	06 - Almond		30 - Smoke Grey
	07 - Dusty Brown		31 - Sunrise
	08 - Caramel		32 - Sage
	09 - Tan		33 - Empire Oak
	10 - Sand Stone		34 - Olive Green
	11 - Mocha		35 - Light Grey
	12 - Frost		36 - Dark Grey
	13 - Dark Maple		37 - Terracotta
	14 - Coal Black		38 - Chocolate
	15 - Space Blue		39 - Jaisalmer
	16 - Ocean Blue		40 - Tera Red
	17 - Burgundy		41 - Dark Blue
	18 - Steel Grey		42 - Blue
	19 - Naturel Earth		43 - Violet
	20 - Platinum		44 - Peach
	21 - Raven		45 - Lime Green
	22 - Silver Grey		46 - Lemon Yellow
	23 - Argent		47 - Sun Gold
	24 - Mushroom		48 - Light Green

- Grout Shades are appropriate guide only.
- Actual shades and textures will depend on jobsite conditions.
- It is advisable to mix Grout from different batches to get uniform colour.



Confast SBR Latex + bonding additive that has been specially modified to improve the properties of render, screed and mortar mixes. SBR bonding agent (Styrene Butadiene copolymer) is liquid latex additive of cementitious render, screed and mortar to improve resistant to chemicals, water and abrasion



SUITABLE FOR :

- It provide an excellent bond to the existing substrate.
- Prevents Leakage & dampness.
- It improved chemical, abrasion and impact resistant.
- Improves abrasion resistant of cement mix.



PACK SIZE

- 20 Kg / Bucket



COVERAGE

- Depends on usage and surface.



हम सिर्फ दिवारो से टाइल्स ही नहि ...
साथ में जोड़ते हे आपका विश्वास.



Manufactured and Marketed By :

Confast Chemicals Pvt.Ltd.
B/h Ultratech RMC,
Near Hindustan Pipe,
Narsanda, District Kheda.
Pin code 387345