Head motion | Global accelerometer node 1090010

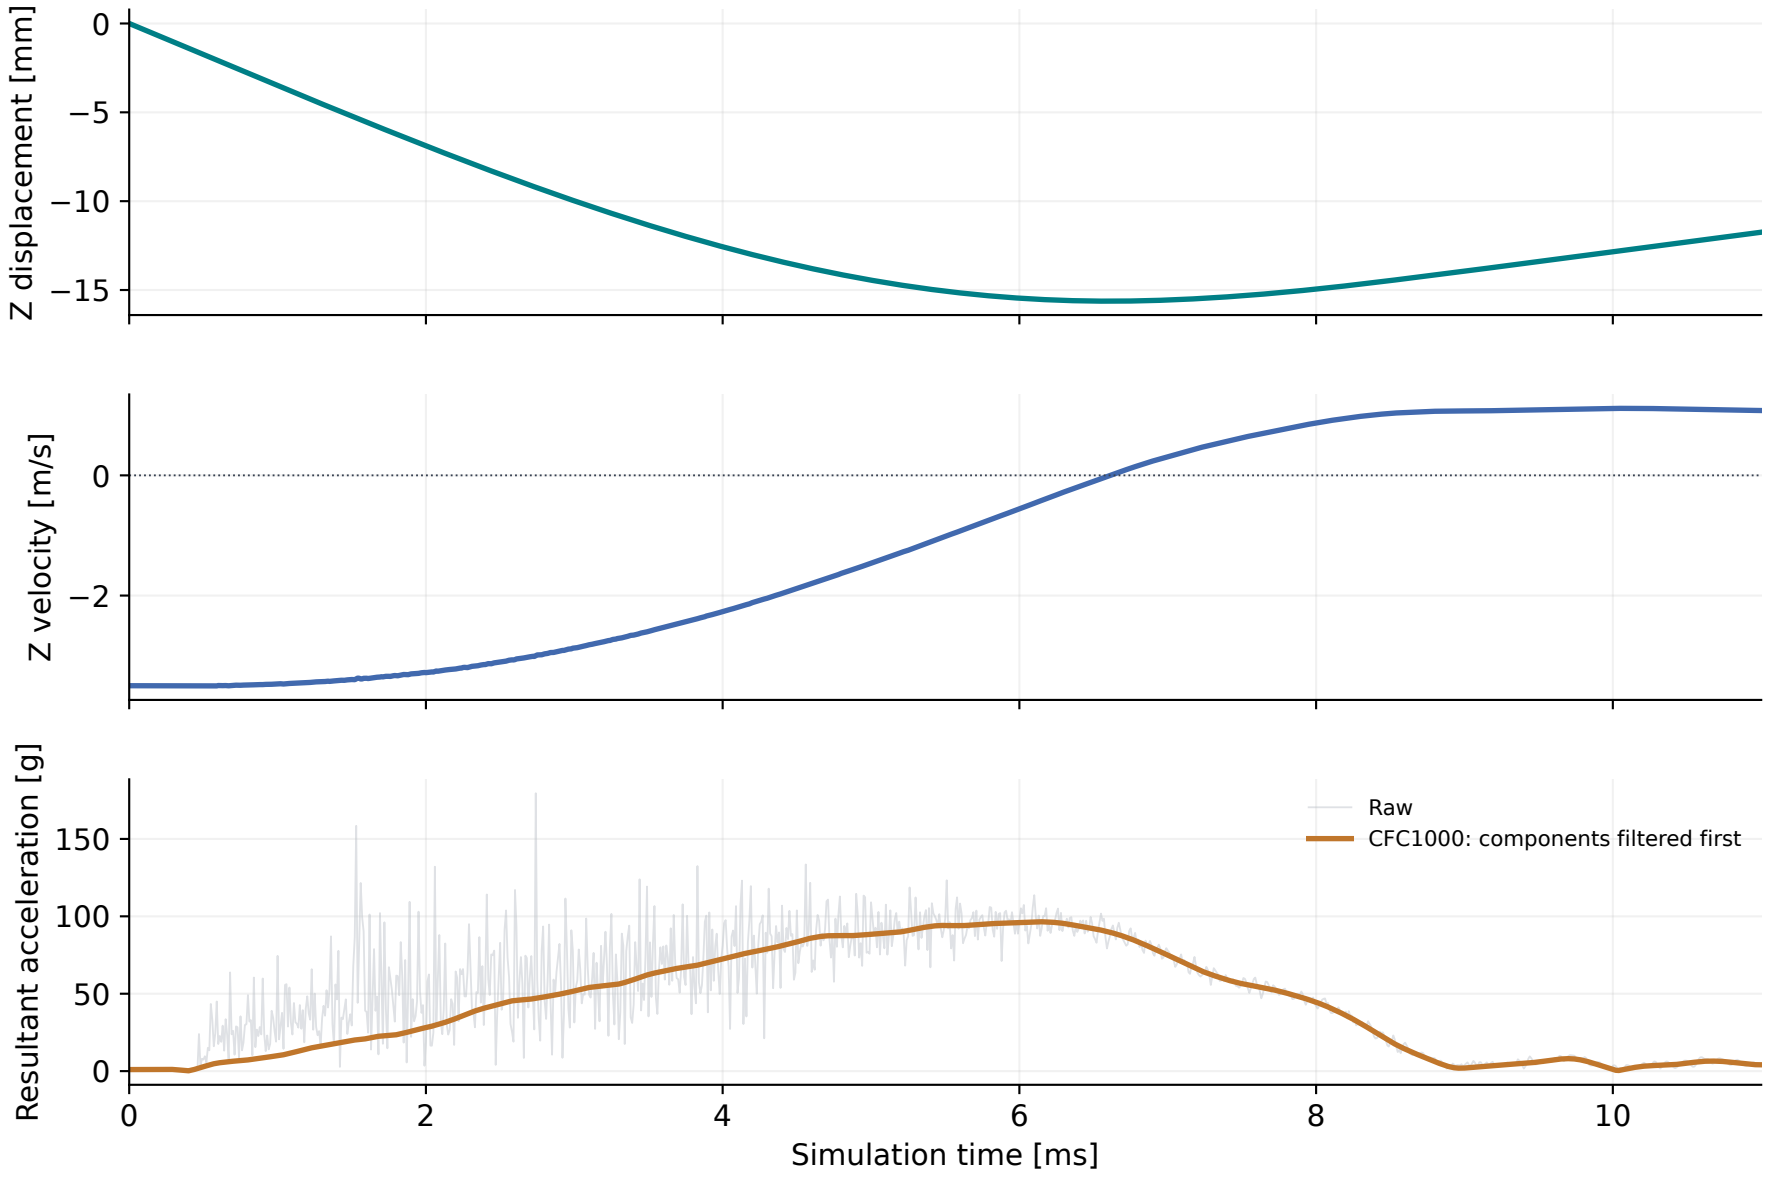

Displacement and velocity are raw; acceleration uses CFC1000 on X/Y/Z before calculating the resultant.
Forward–backward Butterworth, uniform resampling, 10 ms endpoint reflection. Gravity retained; 1 g = 0.00980665 mm/ms².
SAE J211-style digital processing; not certification of the model or measurement channel. No injury claim.