
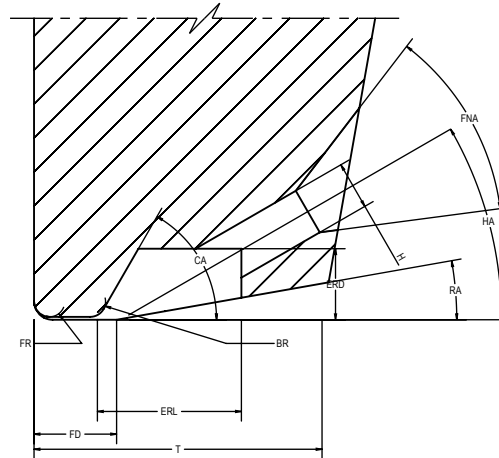
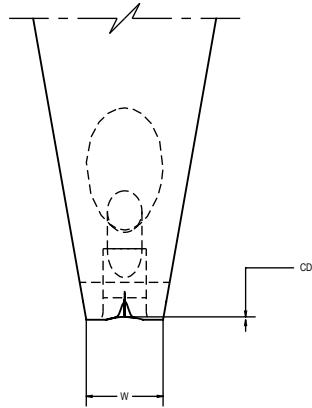
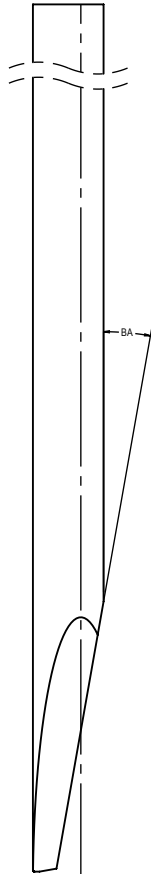



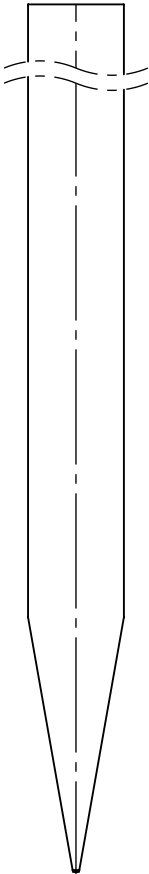

HOW TO ORDER
30COB-2525-L 180-DEG-REV

DIMENSIONS	
BA=10°	(REF)
BR=.0008 ±.0001	[0.02 ±0.003]
CA=60°	(REF)
CD=.0002 ±.0000	[0.004 ±0.001]
ERD=.0037 ±.0003	[0.094 ±0.008]
ERL=.0075	[0.191] (REF)
ERW=.0023 ±.0002	[0.057 ±0.005]
FD=.0043 ±.0008	[0.109 ±0.019]
FL=.0033 ±.0002	[0.084 ±0.005]
FNO=.0038	[0.097] (REF)
FR=.0008 ±.0001	[0.02 ±0.003]
FRO=.0010	[0.024] (REF)
H=.0025 ±.0002	[0.064 ±0.005]
HA=30°	(REF)
ISA=20°	(REF)
RA=10°	(REF)
T=.0150 ±.0005	[0.381 ±0.013]
TD=.0624 ±.0001	[1.585 ±0.003]
TDF=.0460 ±.0005	[1.168 ±0.013]
TL=.8280 ±.0050	[21.031 ±0.127]
W=.0040 ±.0002	[0.102 ±0.005]

MATERIAL	DRAWN		DATE		small precision tools					
TREATMENT	4/6/2026		CKD.						DATE	
UNLESS OTHERWISE SPECIFIED INCH [mm] .XX = ± .01 [0.25] .XXX = ± .005 [0.127] .XXXX = ± .0005 [0.0127] FRACTIONS = ± 1/64 [0.40] ANGLE = ± 1° FINISH: ALL SURFACES ✓ MAX	ENG.		DATE						TITLE	
	MKTG.		DATE		30COR-2525-L 180-DEG-REV					
	PROD.		DATE		SCALE					
	3rd ANGLE PROJECTION		8;8;8		DWG					
			SIZE		DRAWN_BY					
			WAD.Runner		REV.					
				ACAD FILE #:		5201977				
				SUPERS.						