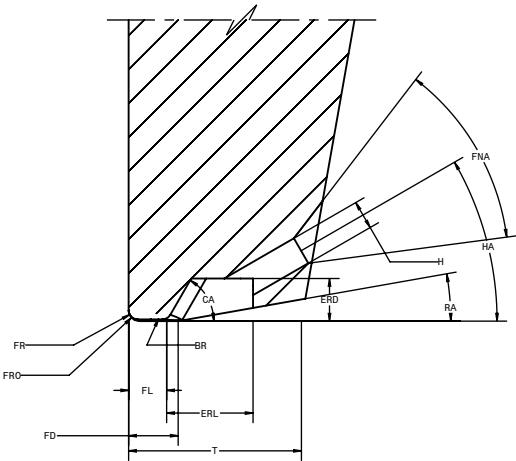
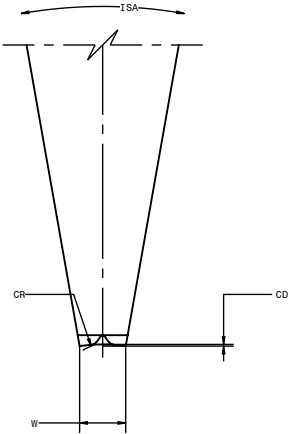



HOW TO ORDER
30COB-2525-L 180-DEG-REV

DIMENSIONS	
CD	= .0002 ± .0000 [0.004 ± 0.001]
ERL	= .0075 [0.191] (REF)
FD	= .0043 ± .0008 [0.109 ± 0.019]
FL	= .0033 ± .0002 [0.084 ± 0.005]
FRO	= .0010 [0.024] (REF)
H	= .0025 ± .0002 [0.064 ± 0.005]
T	= .0150 ± .0005 [0.381 ± 0.013]
TD	= .0624 ± .0001 [1.585 ± 0.003]
TDF	= .0460 ± .0005 [1.168 ± 0.013]
TL	= .8280 ± .0050 [21.031 ± 0.127]

MATERIAL	DRAWN 3/3/2026				SECTION AF-AF SCALE 60:1						
TREATMENT	CKD. DATE				SPT small precision tools						
UNLESS OTHERWISE SPECIFIED INCH [mm] .XX = ± .01 [0.25] .XXX = ± .005 [0.127] .XXXX = ± .0005 [0.0127] FRACTIONS = ± 1/64 [0.40] ANGLE = ± 1° FINISH: ALL SURFACES ✓ 8 MAX	ENG. DATE										
	MKTG. DATE										
3rd ANGLE PROJECTION				TITLE 5201977F							
PROG. DATE				SCALE 8;8;8		DWG A		DRAWN_BY WAD.Runner		REV. A	
				ACAD FILE #: 5201977		SUPERS.					