






...

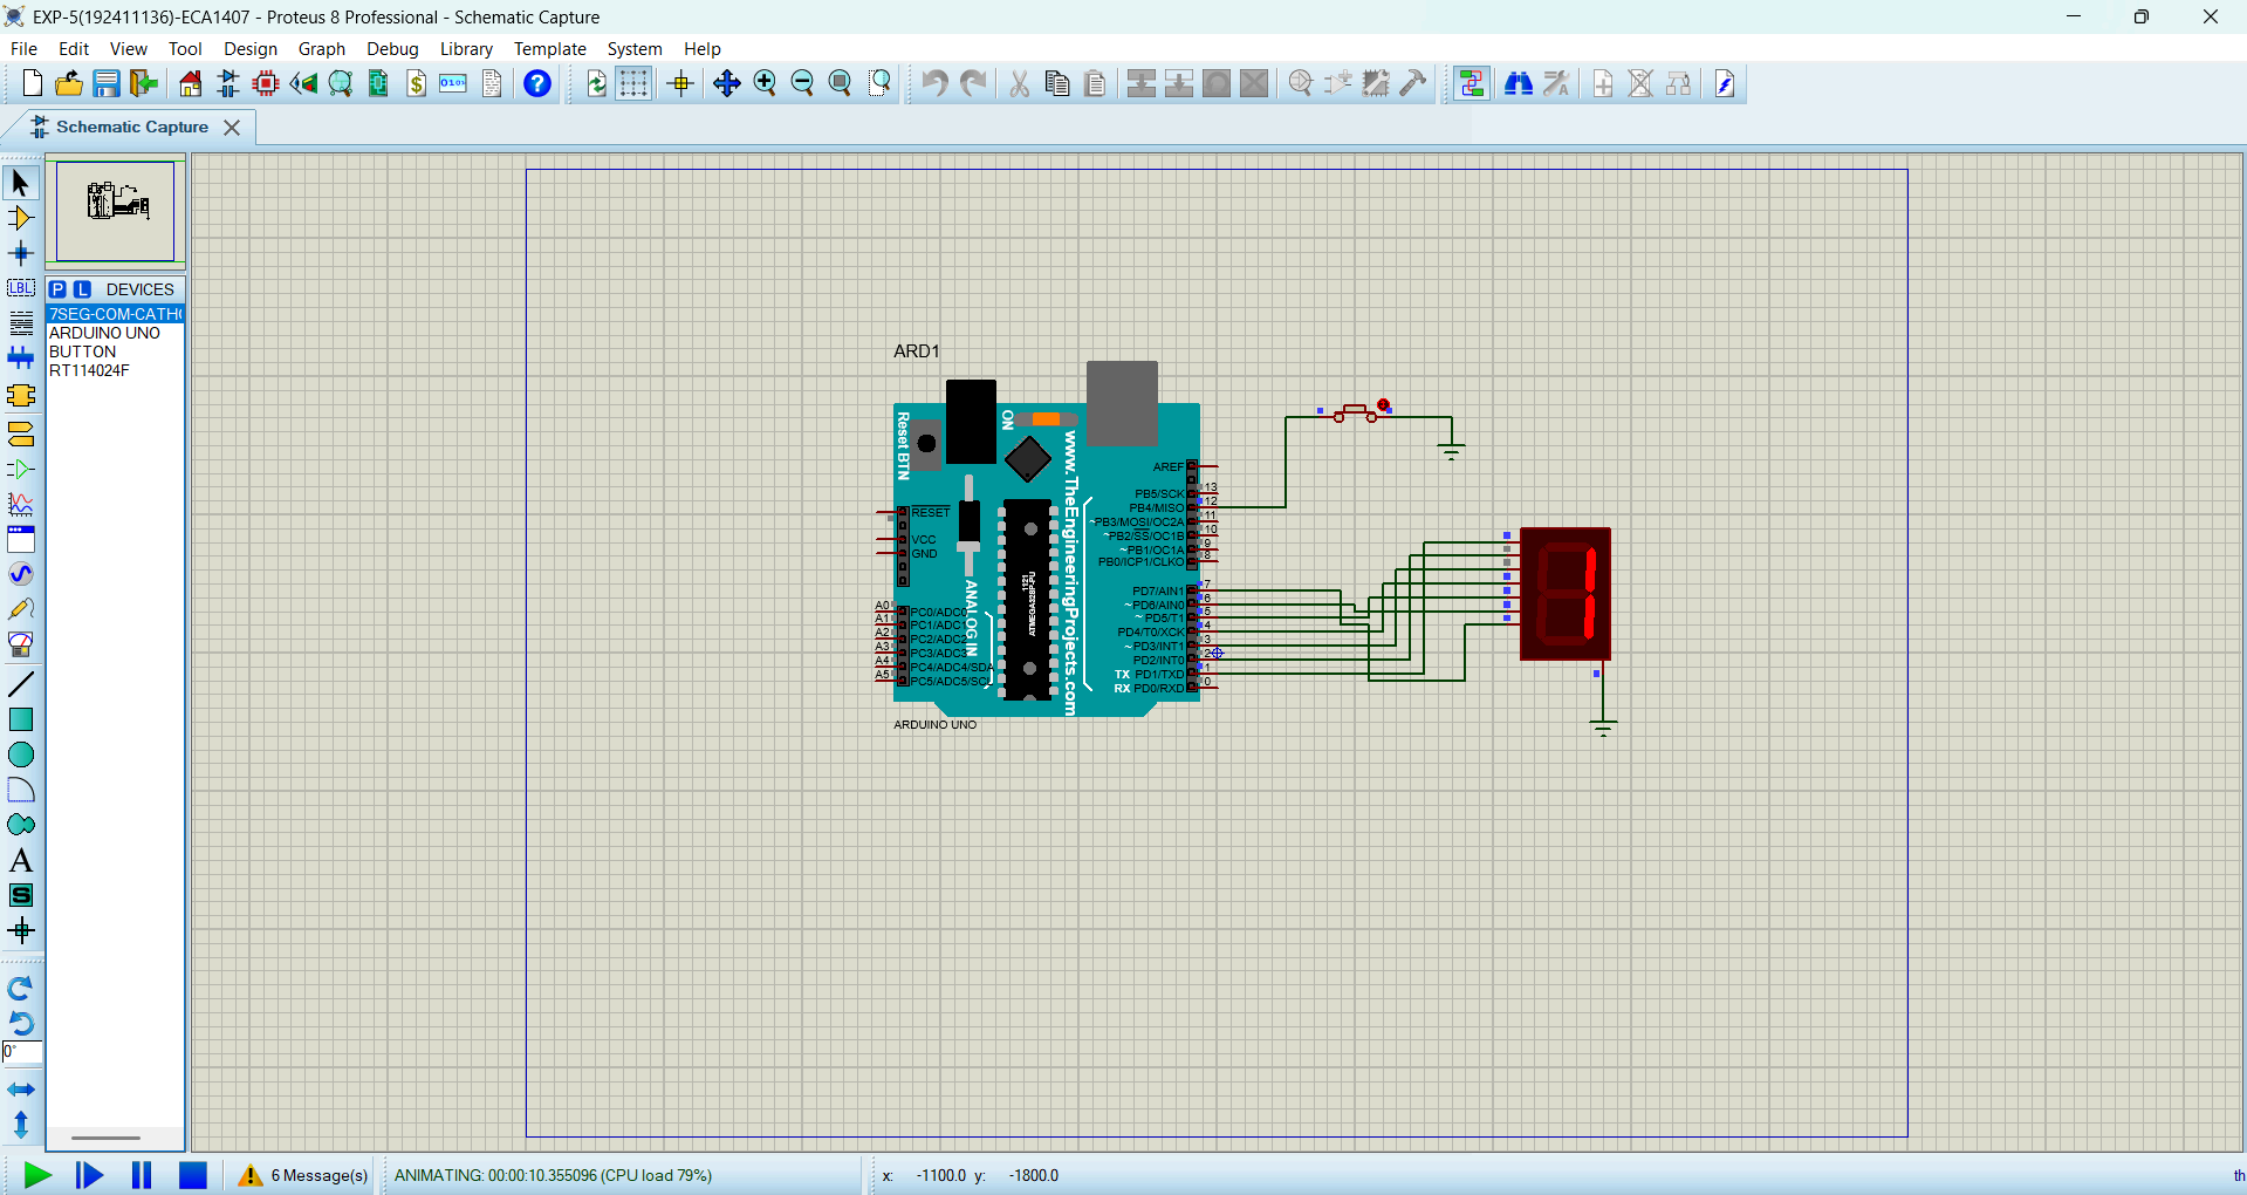

```
1 //Embedded system-ECA1407
2 //Name: P.Yaswanth Choudhary
3 //Reg no: 192411136
4 int x0,x1,x2,x3,x4,x5,x6,x7,x8,x9;
5 int delay_time=200;
6
7 void setup() {
8 //configure pin2 as an input and enable the internal pull-up resistor
9 pinMode(12, INPUT_PULLUP);
10 pinMode(1,OUTPUT);
11
12 pinMode(2,OUTPUT);
13 pinMode(3,OUTPUT);
14 pinMode(4,OUTPUT);
15 pinMode(5,OUTPUT);
16 pinMode(6,OUTPUT);
17 pinMode(7,OUTPUT);
18
19 }
20 void loop() {
21 //read the pushbutton value into a variable
```

Output

[illegible]