

ARTWORK APPROVAL

ISO - Doc No. : GRP/ F/02, Rev. No. : 04 Date - 01.08.2018

PSM/PSP – PSM-000-6237

AW005750 **Version 01**

Prepared By / Préparé par
Sachin

Version Date
30-Jan-2020

ORIFLAME INDIA PVT. LTD-CUSTOMER

(727822) FAIRNESS ESSENTIALS MASK &
SCRUB WITH VITAMINS E AND B3 75ML-35924

APPROVED

By ManojT at 11:19 am, Mar 02, 2020

A Dia (Circumference) Dia (Circonférence)	: 35 (109.24)
B Sleeve Length Longueur de jupe	: 125
C No Print Height at Shoulder Zone non imprimable	: 06
D No Print Height at Open End Zone non imprimable	: 17.4
E Eyemark/Registration distance at open end Position du spot de repérage	: 03
● Eyemark/Registration size Taille du spot	: 3X8
● Non lacquering height Zone non vernie	: 09

All dimensions are in "MM"

INTERNAL REFERENCE

No of Stations

Flexo = 0
Screen = 0
Offset = 2
Total = 2

Flexo+Screen,Screen

☐ FL-1 ☐ FL-2
☐ SC ☐ HS

Offset

☒ M ☐ B ☒ P

APPROVAL / VALIDATION

Signature

Date:

WARNING
The artwork file is not a colour proof. The file is meant to approve the nature and position of text and pattern which is to be printed as well as colour separation.
Le Bon A Graver valide la nature et le placement des textes et des motifs à imprimer ainsi que la séparation des teintes.

Tube Colour / Couleur du tube

☐ WHITE

Print Type / Procédé d'impression

☒ Offset ☐ Screen ☐ Flexo ☐ Flexo+Screen
Print Colours / Couleurs d'impression

☐ PMS: P 9280 C

☐ PMS: P 7463 C

☐ PMS: P XXXX C

☐ PMS: P XXXX C

☐ PMS: P XXXX C

☐ PMS: P XXXX C

☐ PMS: P XXXX C

☐ Print start from Neck
Impression à l'épaule

Hot Foil / Marquage à chaud

☐ Colour

Lacquer/Varnish / Type de vernis

☒ Glossy / Brillant ☐ Satin matt / satiné mat

☐ Matt / mat ☐ Semi matt / semi mat

If Screen printing select lacquer sequence


Si sérigraphie, choisissez la séquence du vernis

☐ Prelacquer / impression sur vernis

☐ Post lacquer / vernis sur impression

EN FR

Pg: 1/2

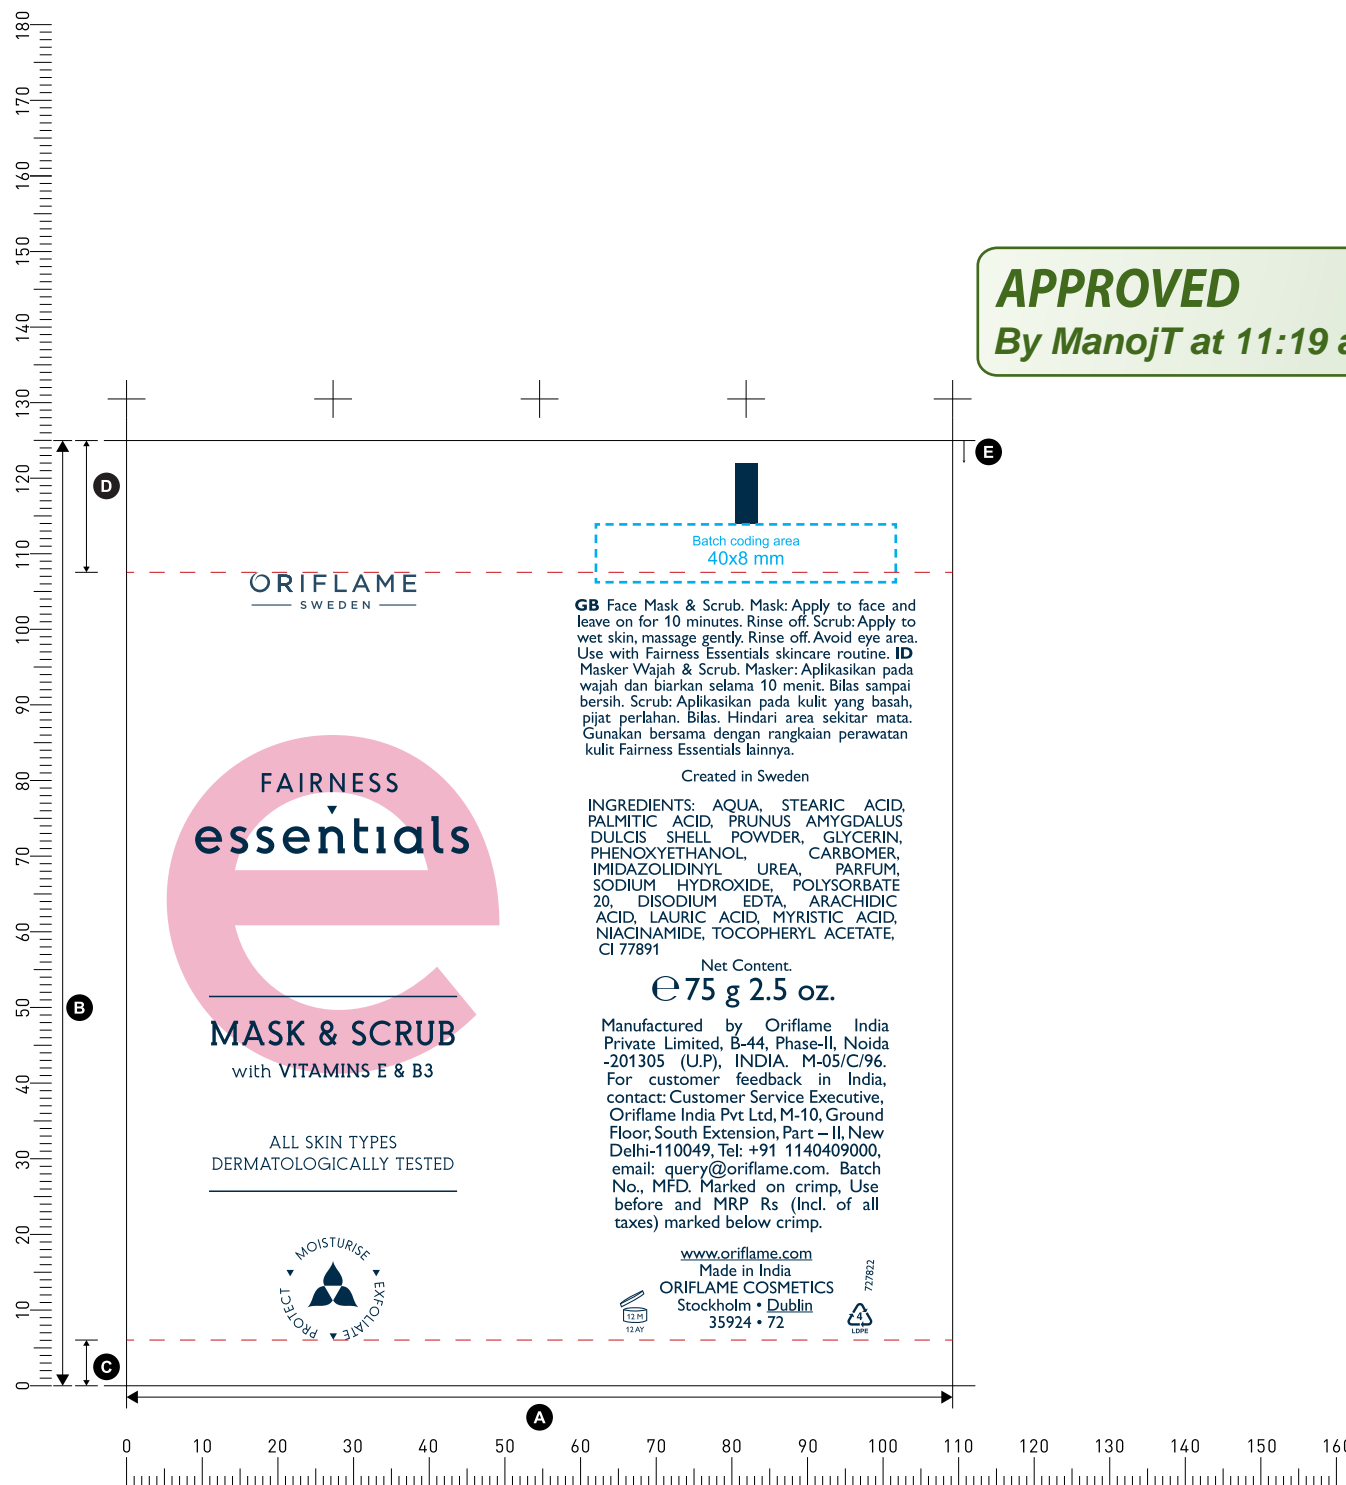

ARTWORK VERSION HISTORY/HISTORIQUE DES VERSIONS

PSM-000-6237**AW005750**

VER	DATE	COMMENT
01	30-01-2020	<ol style="list-style-type: none">1. Centre align both panel2. Change eye mark colour black to P 7463 C

Note:- "If no pint at open end is less than 10MM there is chance of ink cracking while sealing of tube (depends upon colour of sleeve and ink), we suggesting there should be a sealing test before commercial printing"