
APPROVED

By ManojT at 11:07 am, Feb 11, 2020

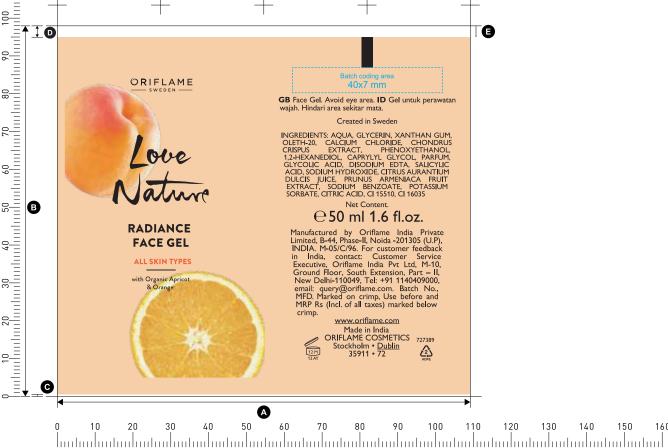

A Dia (Circumference) 35 (109.24) Sleeve Length 95+3=98 onaueur de iupe. No Print Height at Shoulder 0.5 'one non imprimable No Print Height at Open End 03 yemark/Registration distance at open end 03 Eyemark/Registration size : 3X8 Non lacquering height 09 All dimensions are in 'MM' Tube Colour / Couleur du tube INTERNAL REFERENCE WHITE No of Stations Print Type / Procédé d'impression Flexo = 5 Screen = 2 Offset Screen Flexo Flexo+Screen Offset = 0 Print Colours / Couleurs d'impression Total = 7 PMS: P 2015 C (Flexo) Flexo+Screen, Screen PMS: Cyan (Flexo) **√** FL-2 PMS: Magenta (Flexo) HS SC PMS: Offset PMS: Black (Flexo) В PMS: P 2026 C (Screen) APPROVAL / VALIDATION PMS: Black Text (Screen) Print start from Neck limpression à l'épaulement Hot Foil / Marquage à chaud Colour Lacquer/Varnish / Type de vernis Glossy / Brillant Satin matt / satiné mat Signature Semi matt / semi mat Matt / mat Date: If Screen printing select lacquer sequence Si sérigraphie, choisissez la séquence du vernis The artwork file is not a colour proof. The file is meant to approve the nature and position of text and pattern which is to be printed as well as colour separation. Prelacquer / impression sur vernis Post lacquer / vernis sur impression 160 Le Bon A graver n'est pas une épreuve couleur. Le Bon A Graver valide la nature et le placement des textes et des motifs à imprimer ainsi que la séparation des teintes.

EN FR

3D Neopac

ORIFLAME INDIA PVT. LTD-CUSTOMER

(727389) LOVE NATURE RADIANCE FACE GEL WITH ORGANIC APRICOT AND ORANGE 50 ML-35911

AW005748

Sachin

ARTWORK APPROVAL ISO - Doc No.: GRP/ F/02, Rev. No.: 04 Date - 01.08.2018 PSM/PSP-PSM-000-6235

Version 01

Pg: 1/2

30-Jan-2020



ARTWORK VERSION HISTORY/HISTORIQUE DES VERSIONS

PSM-000-6235	AW005748
F 31VI=UUU=UZ.3.3	AVV((U.) / 40

VER	DATE	COMMENT
01	30-01-2020	Centre align both panel

Note:- "If no pint at open end is less than 10MM there is chance of ink cracking while sealing of tube (depends upon colour of sleeve and ink), we suggesting there should be a sealing test before commercial printing"