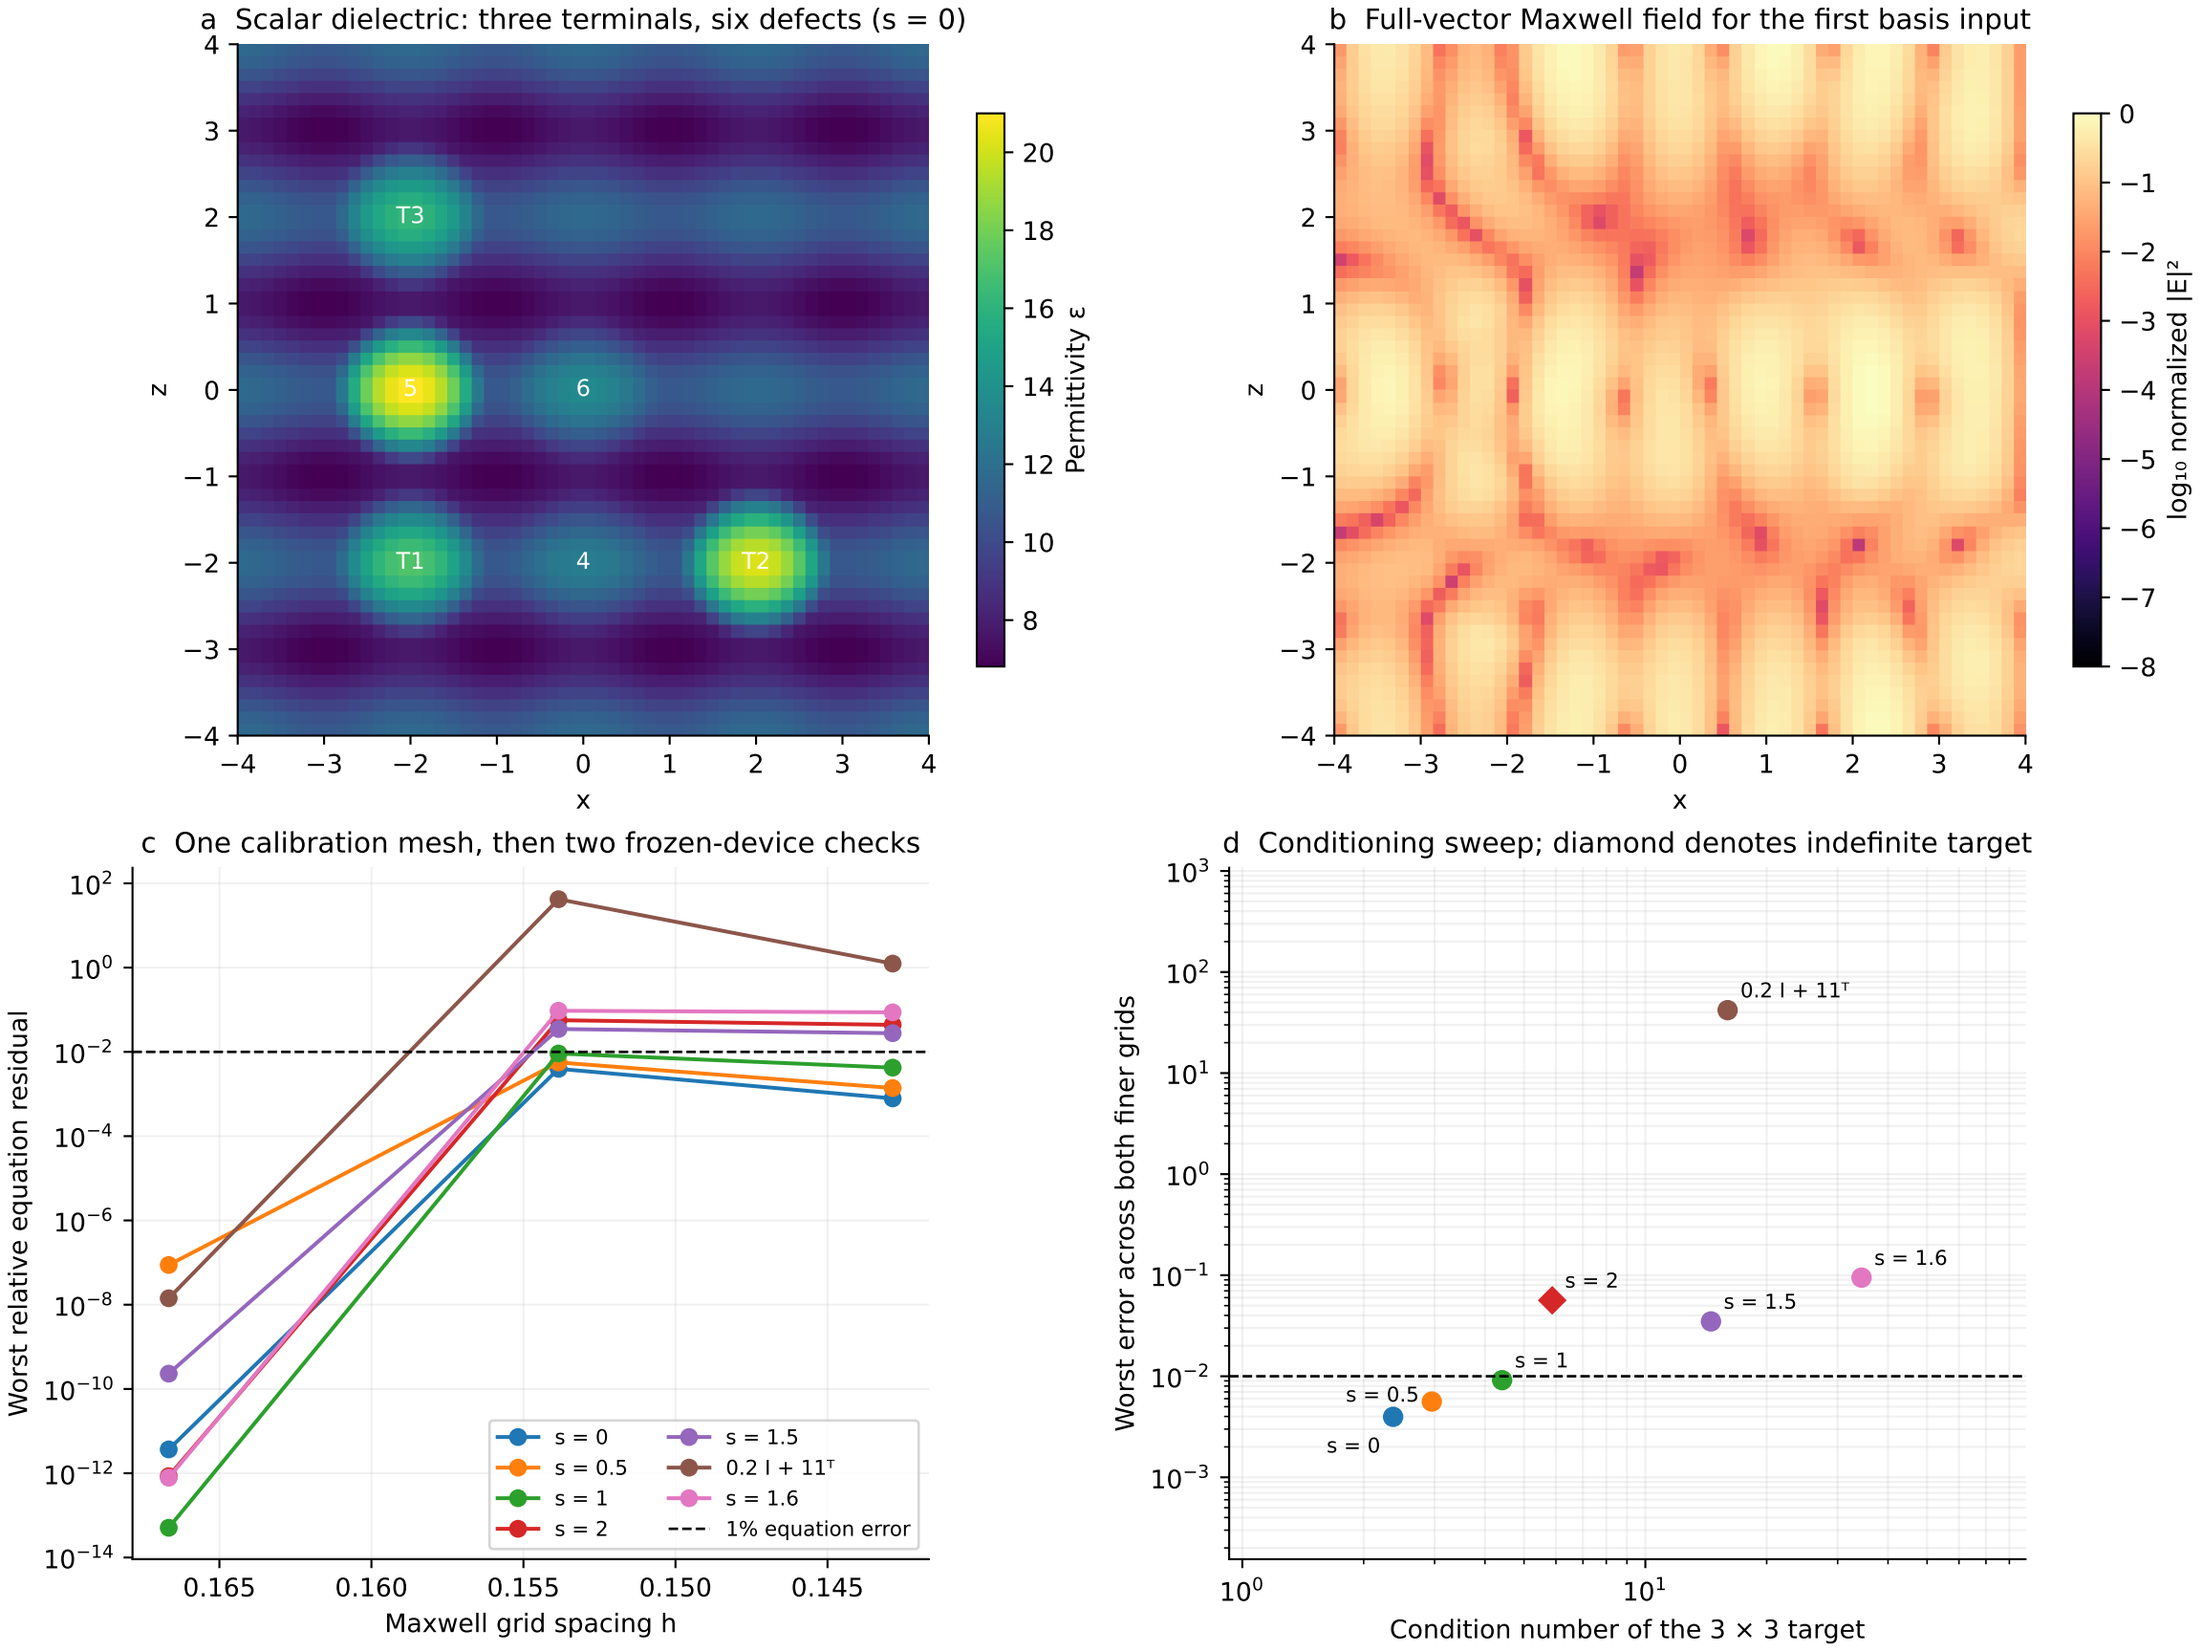
a Scalar dielectric: three terminals, six defects (s = 0)
T3
5
6
T1
4
T2
x
z
Permittivity ε
b Full-vector Maxwell field for the first basis input
x
z
log₁₀ normalized |E|²
c One calibration mesh, then two frozen-device checks
Worst relative equation residual
Maxwell grid spacing h
s = 0
s = 0.5
s = 1
s = 2
s = 1.5
0.2 I + 11ᵀ
s = 1.6
1% equation error
d Conditioning sweep; diamond denotes indefinite target
Worst error across both finer grids
Condition number of the 3 × 3 target
0.2 I + 11ᵀ
s = 2
s = 1.5
s = 1.6
s = 1
s = 0.5
s = 0