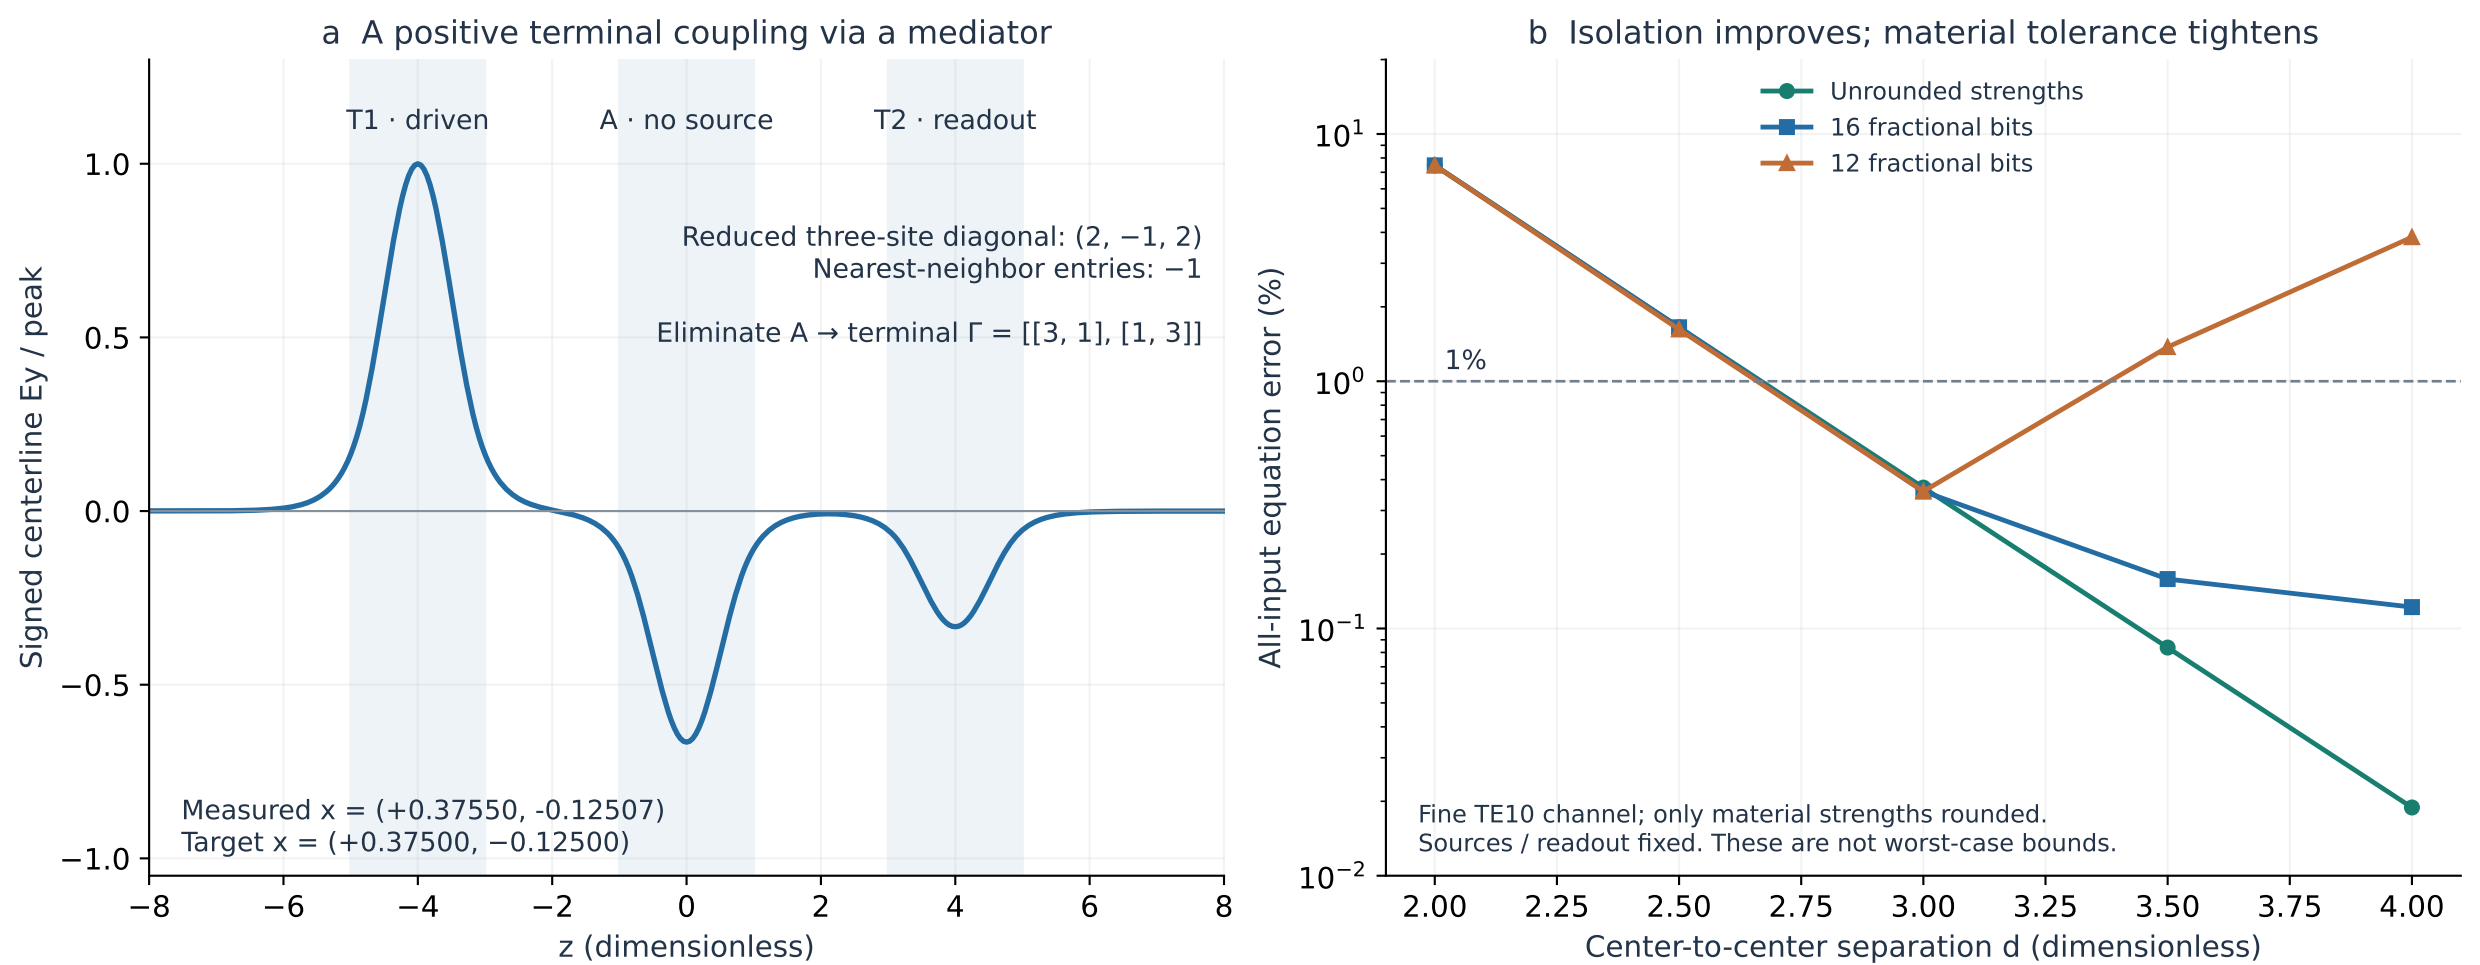
a A positive terminal coupling via a mediator
T1 · driven
A · no source
T2 · readout
Reduced three-site diagonal: (2, −1, 2)
Nearest-neighbor entries: −1
Eliminate A → terminal Γ = [[3, 1], [1, 3]]
Measured x = (+0.37550, -0.12507)
Target x = (+0.37500, −0.12500)
Signed centerline Ey / peak
z (dimensionless)
b Isolation improves; material tolerance tightens
Unrounded strengths
16 fractional bits
12 fractional bits
1%
All-input equation error (%)
Center-to-center separation d (dimensionless)
Fine TE10 channel; only material strengths rounded.
Sources / readout fixed. These are not worst-case bounds.