VALA
PIPES

PLUMBING SYSTEMS · COMPANY PROFILE

Flow, pressure & precision

Pipe systems, fittings and valves from Türkiye — for distributors, contractors and projects.

PPR-C · Blue Fusion · PB · PE-RT · PVC drainage · Magnetic filters



2026

ISTANBUL · ÇERKEZKÖY · TÜRKİYE

WAREHOUSE & DISPATCH

A plumbing brand from Türkiye

Pressure pipes, fittings, valves, heating pipes and drainage — produced in Çerkezköy and shipped from Türkiye to the world.

VALApipes is the plumbing-systems line of VALA, the international brand of EBA Banyo Ürünleri Sanayi ve Ticaret Ltd. Şti. It brings PPR-C, Blue Fusion, polybutylene, PE-RT and PVC systems together under one brand and one quality standard.

Our production facility is in Velimeşe OSB, Çerkezköy / Tekirdağ; our head office is in Ataşehir, Istanbul. Every system family is produced and packed under the same roof, so a project receives a coordinated range rather than parts from different suppliers.

We work directly with distributors, wholesalers, contractors and project teams — from a first container to long-term supply programmes.

Alongside VALApipes, VALA Bathroom (valabath.com) supplies faucets, shower systems, bathroom accessories, furniture and sanitaryware to the same markets — one partner for the building's plumbing and its finished bathrooms.

42	20+	6	543
EXPORT COUNTRIES	YEARS OF EXPORT	SYSTEM FAMILIES	CODES IN THE 2026 ORDER FORM


PRODUCTION HALL


FINISHED-GOODS STOCK


INTERNAL LOGISTICS

Built to stay in the wall

Once a pipe is built into a wall it is rarely seen again. That is why raw material, forming, testing, packing and loading follow one production discipline.

01

Virgin raw material

PPR-C polymer from certified suppliers in Korea, the USA and Saudi Arabia — 100% original virgin grade, with no recycled content.

02

Standards-led production

Pipes to TS EN ISO 15874, DIN 8077 and DIN 8078. Heat-fusion jointing per DVS 2207-11. ISO 9001 quality system and CE marking.

03

Tested in our laboratory

Batch checks in Çerkezköy for density (ISO 1183), melt flow (ISO 1133), tensile properties (ISO 527), Vicat (ISO 306), impact (ISO 179) and heat deflection (ISO 75).

04

Packaging & traceability

Branded yellow VALApipes cartons, batch serial coding and country-specific labelling on request — a consistent identity on every shelf.

05

Planned logistics

Loading tables for 20' and 40' containers, tilt, jumbo and Optima trucks (up to 87 m³). Goods are supplied EXW from our factory.

06

Export experience

More than 20 years of export, with partners in 42 countries across the Middle East, Africa, Europe and Latin America.








ÇERKEZKÖY FACTORY · STILLS FROM THE VALA CORPORATE FILM


Inside our Çerkezköy factory

Production, raw-material handling and finished-goods stock under one roof — ready for container loading.


PIPE EXTRUSION LINE

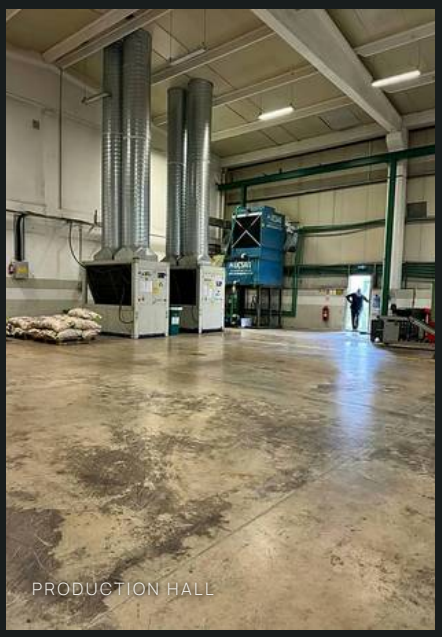
PRODUCTION HALL


RAW-MATERIAL AREA

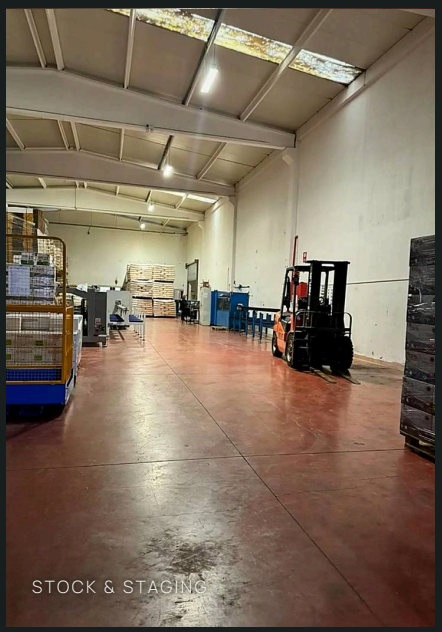
STOCK & STAGING


PACKED GOODS

01 Raw material accepted and checked on site

02 Pipes and fittings produced in the same facility

03 Stock, packing and loading from one location

Stills from the VALA corporate film 2026 (valapipes.com).

Six system families. One discipline.

From hot and cold water to heating and drainage — supported by valves, transition fittings, tools and fixings.



01 PPR-C Pipes & Fittings

PN16 · PN20 · PN25 · Ø20–110 mm




02 PPR-C Blue Fusion

PN20 · Ø20–110 mm



03 PB Pipes & Fittings

Push-fit · Ø15–22 mm

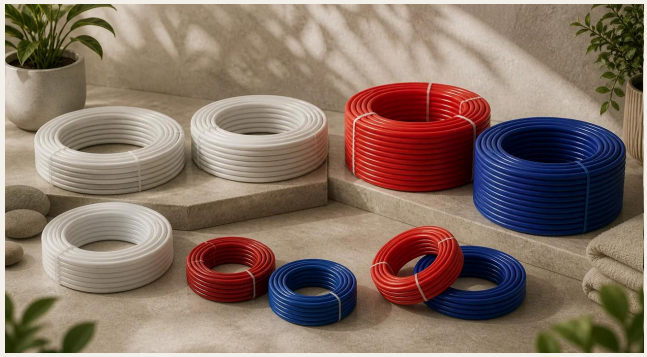

04 PE-RT Pipes

16 × 2 mm · Oxygen-barrier options



05 PVC Drainage

TS EN 1329-1 · Ø50–160 mm



06 Magnetic Filters

Washing machine · Boiler

Ranges, sizes and pressure classes vary by product code. See the 2026 technical catalogue for full code tables.



PPR-C HOT & COLD WATER RISERS

PRESSURE SYSTEMS · 01

PPR-C pipes

Polypropylene random copolymer (PPR, Type 3) for hot and cold potable water, risers and horizontal mains.

SERVICE TEMP.	Continuous ≤ 70 °C; short-term peaks up to 95 °C
JOINTING	Heat (socket) fusion at 260 °C ± 10 °C per DVS 2207-11
STANDARDS	TS EN ISO 15874 · DIN 8077 · DIN 8078

PIPE	CLASS	SIZES
PPR-C pipe	PN16 · PN20	Ø20–110 mm
Glass-fibre composite (GF)	PN20 · PN25	Ø20–110 mm
Inside aluminium-foiled	PN20	Ø20–32 mm
Inside aluminium-foiled	PN25	Ø20–63 mm
UV double protection	PN16 · PN20	Ø20–110 mm
Al-foiled + UV protection	PN25	Ø20–63 mm

Nine diameters: Ø20, 25, 32, 40, 50, 63, 75, 90 and 110 mm.



PN16 pipe
Ø20–110 mm



PN20 pipe
Ø20–110 mm



Composite PN20
Glass-fibre (GF)



Composite PN25
Glass-fibre (GF)



Al-foiled PN25
Inside aluminium foil

Product images are representative. Confirm class, dimensions and colour by product code.

A complete fitting system

338 PPR-C fitting codes in the 2026 order form — plain, reducing and threaded transition fittings from Ø20 to Ø110 mm.



Socket
Ø20–110



90° elbow
Ø20–110



45° elbow



Tee piece
Ø20–110



Reduction



End cap
Ø20–63



Long crossover
Ø20–32



Manifold
32×20 – 50×32 mm



Female tee
Threaded, brass insert



Male elbow
Threaded, brass insert



Female hex connection
Ø20–90



Double-sided adaptor
Ø20–63



Adapter with loose nut
Ø20–32



Female elbow
Threaded, brass insert



Male tee
Threaded, brass insert



Water meter adaptor
25 × 1"

Plain fittings

Sockets, reductions, 90° / 45° / tailed / long elbows, tees and reduction tees, end and blind caps, crossovers.

Transition fittings

Round and hex male / female adapters, elbows and tees with brass inserts; loose-nut adapters; Ø20 to Ø90 × 3".

Installation points

Battery and WC connection pieces, double battery connections, adjustable battery sets, manifolds and test taps.

Valves & connection sets

Shut-off, control and service valves that fuse directly into the PPR-C line — from economy to chrome “Lux” and “Delux” versions.



Ball valve
Ø20–63



Ball valve, metal handle



Ball valve tap
Ø20



Stop valve



Stop valve, metal head
up to Ø63



Lux brass valve
Ø25



Radiator ball valve, elbow
Ø20–25



Metal ball valve, flange
Ø20–63

Also in the range: chrome eco, lux and concealed valves · mini and eco ball valves · straight radiator valves · check valves · male filters · boiler connection sets.

SYSTEM FAMILY · 06

Magnetic filters

Neodymium magnet filters capture ferromagnetic particles in the line before they reach washing machines, thermosiphons and boilers.



Washing machine
½"



Washing machine
¾"



Boiler connection set
25 × ¾", brass

Thermosiphon filter ½" also available. Materials: PP-R with neodymium magnet or brass body.





PRESSURE SYSTEMS · 02

Blue Fusion

A PN20 PPR-C pipe line in a distinctive blue colour code, with its own family of Fusion transition fittings.

CLASS	PN20
SIZES	Ø20 × 3.4 to Ø110 × 18.4 mm — nine diameters
JOINTING	Heat (socket) fusion; threaded Fusion fittings
USE	Hot and cold water lines, risers and mains





Female round adapter



Male round adapter



Female elbow



Female tee



Female double battery conn.

PB & PE-RT

Flexible pipe systems for potable water, central heating and underfloor heating circuits.



03 Polybutylene (PB)

Push-fit PB pipes and fittings for potable water, central heating and residential plumbing.

SIZES	15–22 mm
FORM	Coils 25 / 50 / 100 m and straight bars
RATING	Max. 80 °C · 10 bar
FITTINGS	Elbows, tees, reduced tees, socket unions, reducers, 2- and 3-outlet manifolds




Coil pipe



Equal tee



Manifold

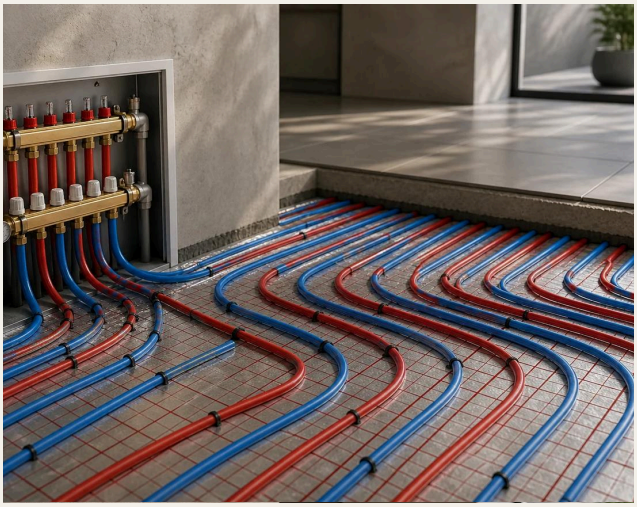

04 PE-RT

Single-layer PE-RT and PE-RT/AL/PE-RT multilayer pipes for underfloor heating and radiant systems.

SIZE	16 × 2 mm
VERSIONS	PE-RT · with red / blue cover · 5-layer EVOH oxygen barrier (also with covers) · PE-RT/AL/PE-RT
RATING	Max. 95 °C · 6 bar at 70 °C
O_2 BARRIER	DIN 4726



PE-RT/AL/PE-RT



O_2 barrier, red



O_2 barrier, blue

ALSO FOR HEATING CIRCUITS

Manifolds

PPR / PEX manifolds with valves, Ø25 with 4 to 8 outlets, and wall-mount kits.

PEX pipes

PEX, oxygen-barrier PEX and Al-PEX pipes, Ø16 and Ø20 × 2.0 mm.

Fixing & tools

PEX torque clamps and PEX-ALPEX pipe cutters.

Ratings as published in the VALApipes product data. Confirm pipe build and coil length by product code.

PVC drainage

TS EN 1329-1 Type-1 uPVC soil and waste systems for residential and commercial buildings.

STANDARD	TS EN 1329-1, Type-1
DIAMETERS	Ø50 · Ø75 · Ø110 · Ø160 mm
LENGTHS	Short pieces to 6 m pipes, by diameter
COLOUR	White
FITTINGS	Elbows 45° / 90°, single and double branches, sliding sockets, reductions, end caps, cleaning access, S-siphons, check valves





45° branch



90° branch



Double branch



Sliding socket



Reduction



Cleaning access



S-siphon



Check valve

Site & infrastructure

Waste-water check valves Ø50–200 mm · inspection boxes 20–48 cm · square covers 30–60 cm · lid boxes · manhole covers and frames 600 mm.

Fixings

Clamps with triphone, nuts or full set from 3/8" to 10" and wide heavy-load clamps from 1" to 10".

Everything for the installer

Welding equipment, cutting tools and fixings sold alongside the pipe systems — so a distributor can supply the complete job.



01

Welding

- Welding machines — Eco Minibox, Lux CM6
- Welding kits 16–160 mm
- Repair welding tools

02

Cutting & testing

- PPR pipe cutters Ø16–42 and Ø40–63
- Automatic cutter Ø16–42
- PEX-ALPEX cutter · test pump

03

Fixing

- Single and double pipe clamps
- Clamps 3/8"–10", heavy-load 1"–10"
- Brackets, holders, corner conduit, tank connectors



Clamp with nuts



Clamp, full set



Pipe cutter



Boiler connection set



APPLICATIONS

From rooftop to basement

01
Residential
Clean water, waste water and heating — from single homes to residential towers.

02
Commercial
Main lines and branches for offices, malls and mixed-use buildings.

03
Hotels & resorts
High-volume hot-water distribution and guest-bathroom lines.

04
Healthcare & public
Hospitals, schools and municipal buildings.

05
Underfloor heating
PE-RT, PE-RT/AL/PE-RT and PB circuits with manifolds.

06
Drainage
TS EN 1329-1 PVC soil and waste stacks and branches.

07
Mass housing
Contractor supply through distributor stock.

08
Light industrial
Oil-free compressed-air lines within the rated PN class.

WHICH SYSTEM WHERE

Hot & cold water	PPR-C · Blue Fusion · PB
Heating & UFH	PE-RT · PB · PPR-C composite / Al-foiled
Drainage	PVC Type-1
Appliance protection	Magnetic filters

Out of scope for PPR-C: continuous service above 70 °C, gravity drainage, petroleum products and aggressive solvents.

Engineering data first

The references, standards and raw-material values published in our 2026 technical catalogue and data sheets.

CE	ISO 9001	TSE	DIN 8077
EUROPEAN CONFORMITY	QUALITY MANAGEMENT	TURKISH STANDARDS	PPR DIMENSIONS

Standards by system

PPR-C pipes	TS EN ISO 15874 · DIN 8077 · DIN 8078
PPR-C fittings	TS EN ISO 15874 · DIN 8077
Heat-fusion jointing	DVS 2207-11
PVC drainage	TS EN 1329-1
PE-RT oxygen barrier	DIN 4726
Quality system	ISO 9001

DOCUMENTATION

Batch test certificates, Declarations of Performance and project-specific dimensional tables are available on request. Country-specific certification requirements are reviewed for each market.

PPR-C raw material properties

PROPERTY	METHOD	VALUE
Density at +23 °C	ISO 1183	0.90–0.91 g/cm³
Melt flow rate MFR 230 °C / 2.16 kg	ISO 1133	0.2–0.5 g/10 min
Yield stress (50 mm/min)	ISO 527	23–28 MPa
Elongation at yield	ISO 527	> 10 %
Tensile modulus (secant)	ISO 527	850 MPa
Ball indentation hardness	ISO 2039-1	48 N/mm²
Shore hardness D	DIN 53505	65
Charpy notched impact, +23 °C	ISO 179/1eA	22 kJ/m²
Vicat softening VST/A50	ISO 306	132 °C
Melting range	DSC	145–150 °C
Thermal conductivity	DIN 52612	0.24 W/mK
Linear thermal expansion (20–90 °C)	DIN 53752	1.5×10^{-4} 1/K

From raw material to dispatch

01

Raw material acceptance

Virgin PPR-C from Korea, the USA and Saudi Arabia; density and melt-flow checks.

02

Extrusion & moulding

Pipes and fittings formed in Çerkezköy to DIN dimensional specifications.

03

Laboratory testing

Tensile, Vicat, impact and heat-deflection tests to ISO methods.

04

Packing & traceability

Batch serial codes on every carton; country-specific labels on request.

Source: VALApipes 2026 technical catalogue (raw-material table) and PPR-C technical data sheet.



VALAPIPES CARTONS AT A DISTRIBUTOR

From factory floor to container door

Our yellow VALApipes cartons give every distributor a consistent shelf identity — size, code and colour laid out the same way in every store. Each batch carries a serial code, and country-specific labelling is available on request.

BOX TYPE 1

0.021 m^3

BOX TYPE 2

0.032 m^3

Gross loading capacity


VEHICLE	M³	TYPE 1	TYPE 2
20' DC	33.3	1,585	1,040
40' DC	66.9	3,185	2,090
40' HC	76	3,619	2,375
Tilt truck	79	3,761	2,468
Jumbo truck	80	3,809	2,500
Truck with trailer (Optima)	87	4,142	2,718

Gross capacity in cartons, from the 2026 technical catalogue. Actual loads depend on the product mix.



From Türkiye to 42 countries

More than 20 years of export experience. Our export team works directly with distributors, contractors and wholesalers — loading, documentation and packaging handled in one place.

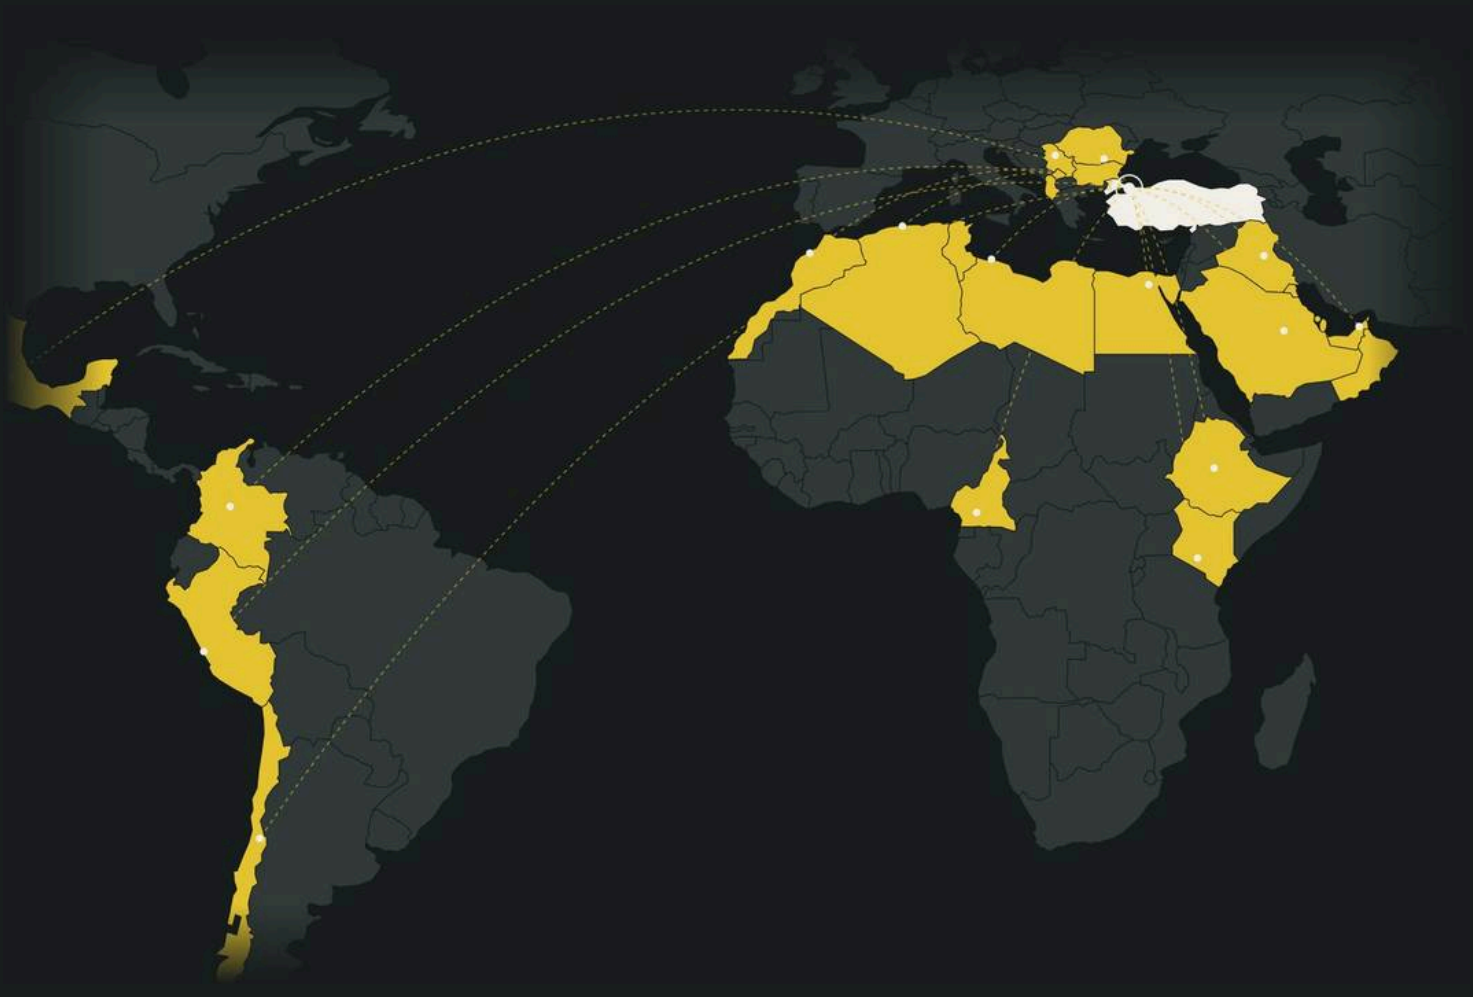

Istanbul head office Selected markets

Middle East & Gulf

UAE (Dubai) · Saudi Arabia · Qatar · Oman · Bahrain · Kuwait · Iraq

North, West & East Africa

Egypt · Libya · Algeria · Morocco · Tunisia · Cameroon · Kenya · Ethiopia

Europe & the Balkans

Bulgaria · Romania · Serbia · Albania · Kosovo

Latin America

Mexico · Colombia · Peru · Chile

Selected markets shown. Full country references on request.

Grow with VALApipes

Clear terms and a complete range — built for distributors who want one reliable source for plumbing systems.

01

Distributor

Stock and sell the VALApipes range in your territory, with catalogues, technical documents and branded cartons for a consistent shelf presence.

02

Exclusive distributor

Territory exclusivity for partners with annual purchases of USD 150,000 or more.

03

Project supply

Direct supply for contractors, developers and hotel or hospital projects — from a single order to multi-year agreements.

04

Private label

Production under your own brand is possible. Packaging, labelling and quantities are agreed per order.

COMMERCIAL TERMS

INCOTERMS	EXW factory — Çerkezköy, Tekirdağ
PAYMENT	40% advance · 60% before shipment
DELIVERY	4 weeks
MINIMUM QUANTITIES	Per product, as listed in the order form — metres for pipes, pieces for all other items
PRICES	Quoted on request, based on your completed order form

Technical catalogue
2026 edition, EN · RU · FR

Data sheets & guides
TDS, installation guides, DoP summaries

CAD library
AutoCAD DXF blocks at valapipes.com

Samples
Sample requests via valapipes.com

Clear details before dispatch

One form, one offer. From the order form to an EXW collection in five steps.

01 Request the order form

The 2026 VALApipes order form lists 543 product codes with their minimum quantities — no prices.

02 Enter your quantities

Fill in the "Your Qty" column. Below the minimum, the order quantity adjusts to the minimum automatically.

03 Send it to us

Email the completed form to info@vala.com.tr.

04 Receive your price offer

We reply with a price offer for the selected codes and quantities.

05 Confirm & ship

40% advance to start; 60% before shipment. Delivery in 4 weeks, EXW Çerkezköy.

Minimum quantities — examples

PPR-C pipe PN20 Ø20 × 3.4	7,500 m
PPR-C pipe PN20 Ø63 × 10.5	300 m
PPR-C pipe PN20 Ø110 × 18.4	150 m
PE-RT pipe 16 × 2	20,000 m
PPR socket Ø20	10,000 pcs
PPR tee piece Ø20	7,500 pcs
PPR female round adapter Ø20 × ½"	2,500 pcs
PPR ball valve eco Ø20	1,750 pcs
Magnet filter, washing machine ¾"	200 pcs
PPR welding kit 63 mm	50 pcs

GOOD TO KNOW

- Minimums apply per product code.
- Pipes in metres (m); all other items in pieces (pcs).
- Mixed orders across system families are welcome.
- Private-label and country-specific labelling are agreed before production.
- Prices are never listed in the form — every offer is prepared for you.

VALA
PIPES

YOUR VALAPIPES CONTACT

Your next plumbing project

For distribution, private label and project supply enquiries.

VALA Pipes

EXPORT & SALES

EMAIL	info@vala.com.tr
PHONE	+90 540 440 22 00
WHATSAPP	+90 540 440 22 00
WEB	www.valapipes.com · www.vala.com.tr

HEAD OFFICE

Ferhatpaşa Mah. Mareşal Fevzi Çakmak
Cad. 35 Sok. No: 48
Ataşehir / İstanbul / Türkiye

FACTORY

Velimeşe O.S.B. Mah. 227. Sok. No: 24/1
Çerkezköy / Tekirdağ / Türkiye

EBA Banyo Ürünleri Sanayi ve Ticaret Ltd. Şti.

