


THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF AIDIN ROBOTICS INC. EXCEPT AS AUTHORIZED BY AIDIN ROBOTICS INC.
IN A SEPARATE WRITING, THIS DOCUMENT AND ITS INFORMATION SHALL NOT BE COPIED, USED OR DISCLOSED TO OTHER AND SHALL BE RETURNED
TO AIDIN ROBOTICS INC. UPON REQUEST

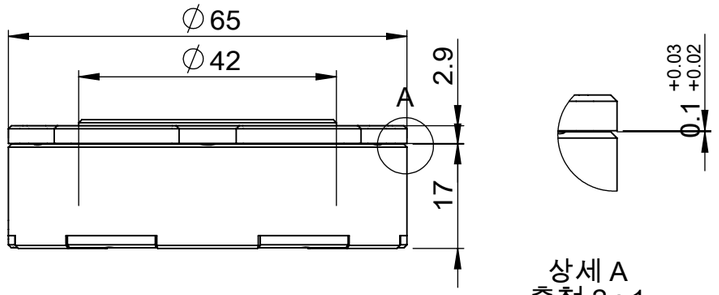

상세 A
축척 2 : 1

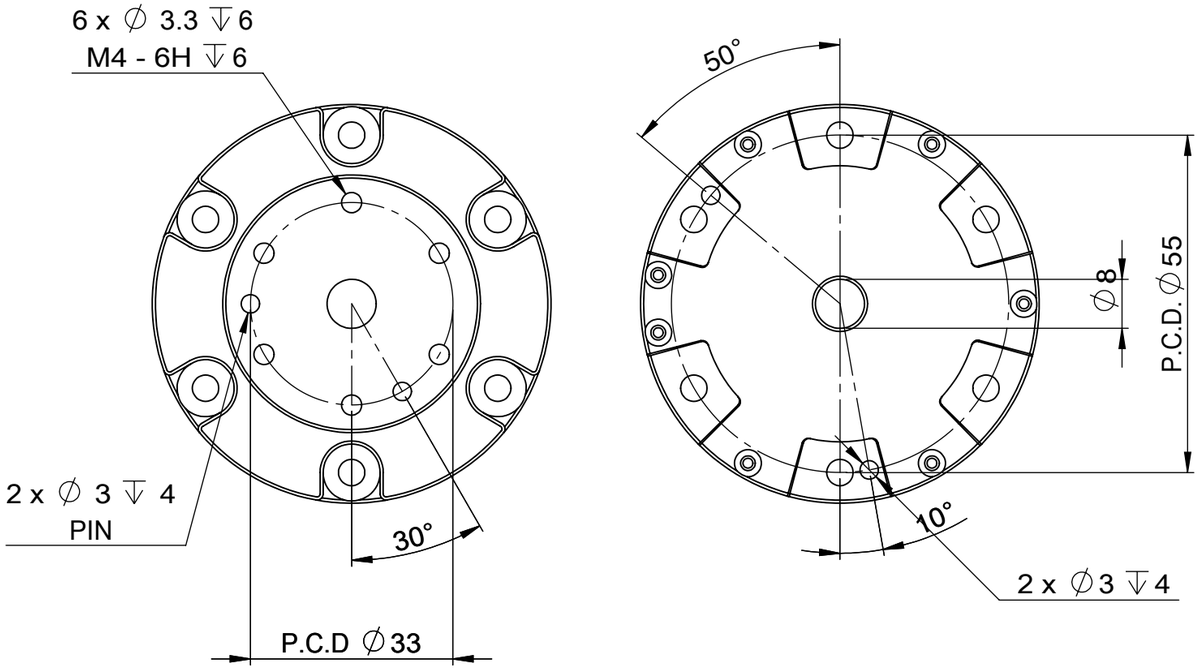

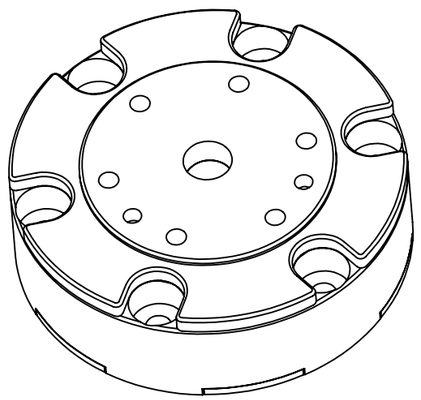

Index	Unit	Value
Operating voltage	VDC	5
Max. safe excitation voltage	VDC	12
Nominal force range (F_XYZN)	N	2000
Nominal torque range (M_XYZN)	Nm	100
Limit force (F_XYZL)	N	3000
Limit torque (M_XYZL)	Nm	120
Force Noise-free resolution (STD)	N	12
Torque Noise-free resolution (STD)	Nm	1
Dimensions	mm	D65 x H21
Weight	g	
Temperature	℃	10-50
Sample rate	Hz	1000
Interfaces	1,000Kbps	CAN, CAN-FD
Wire	Length: 15 cm	For User: CAN_H / CAN_L / VCC / GND

- NOTE -
1. 상단 내부 M4 Tap, M4 6개 체결 (PCD : 33)
2. 하단 외부 M4 카운터 보우, M4볼트 6개 체결 (PCD : 55)

NO	DATE	CONTENT	REV. BY	CHECKED BY

TOLERENCES UNLESS OTHERWISE SPECIFIED

SURFACE	SIZE (mm)	f
~ -	0.5 ~ 6	±0.05
▽ Ra 25	6 ~ 30	±0.1
▽▽ Ra 6.3	30 ~ 120	±0.15
▽▽▽ Ra 1.6	120 ~ 400	±0.2
▽▽▽▽ Ra 0.2	400 ~ 1000	±0.3
	1000 ~ 2000	±0.5
	2000 ~	-

NO	NAME	SPECIFICATION	MATERIAL	Q'TY	SET	FINISH

DRAWN BY	CHECKED BY	APPROVED BY	CREATED	MODIFIED		
			2026-02-12	2026-02-12	3RD ANGLE PROJECTION	1:1 mm

AIDIN ROBOTICS

A3FT2000-D65

A3 (420 x 297)