
Part Number: AK60-6

1. Electrical & Mechanical Specifications (Standard Reference)

Parameter	Symbol	Specification Value	Test Condition / Notes
Part Number	ID	AK60-6	AK-Series QDD
Manufacturer	Vendor	CubeMars	Outer-Rotor BLDC QDD
Rated Input Voltage	V_rated	24.0 V	Nominal DC Bus
Stall / Peak Torque	tau_stall	9.0 N.m peak torque	At 24.0 V
Continuous Rated Torque	tau_cont	3.0 N.m rated torque	25 degC ambient, continuous duty
No-Load Speed	omega_0	320 rpm (at 24V KV80)	Unloaded output shaft
Actuator Mass (Weight)	m_act	360 g	Includes housing & internal gearhead
Internal Reduction	i_int	6 : 1 Planetary QDD	Integrated gear stage
Envelope Dimensions	W x H x D	68.0 x 39.5 x 68.0 mm	Outer housing envelope

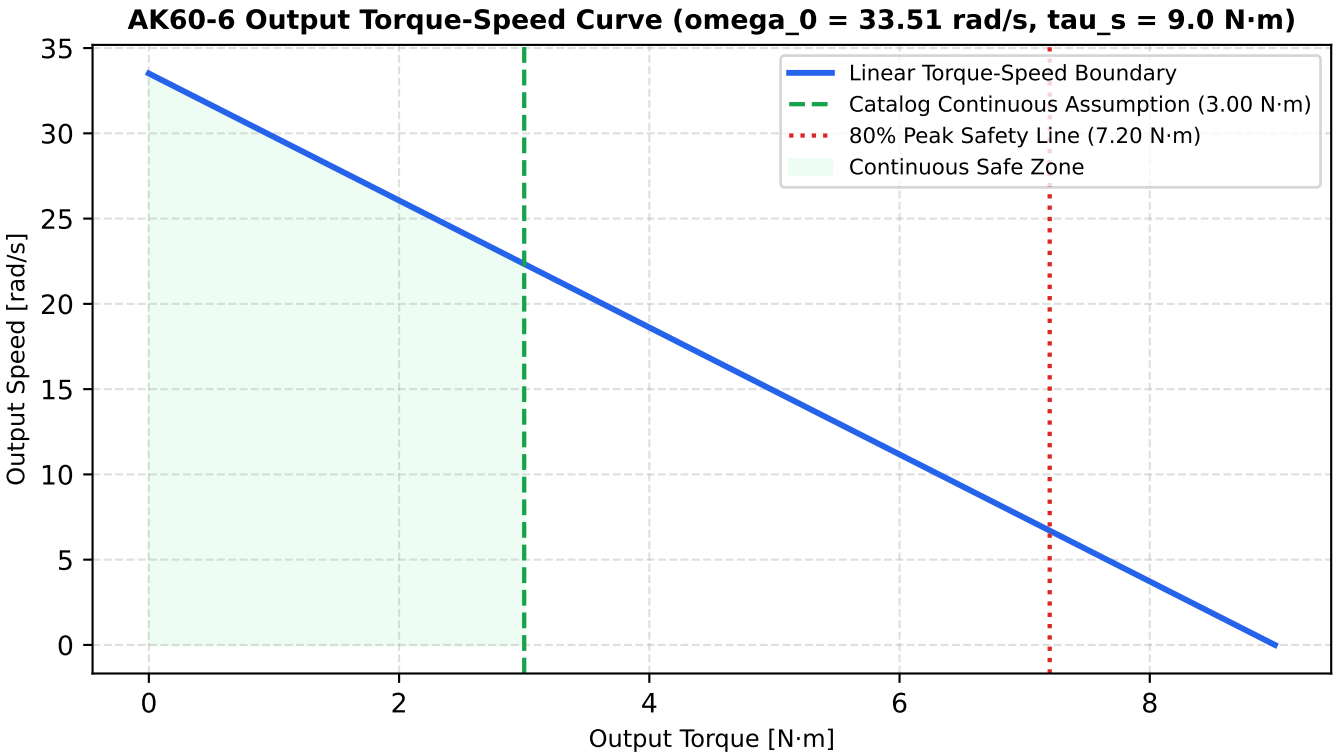

AK60-6 — Project Reference & Review Notes

2. Mechanical Mounting & Frame Integration
   - Housing Envelope: 68.0 mm x 39.5 mm x 68.0 mm
   - Catalog Mass (unverified): 360 g (0.3600 kg)
   - Mounting Pattern: Not verified; obtain manufacturer flange/shaft drawings.

3. Thermal & Duty-Cycle Notes
   - Catalog continuous torque is an input assumption until its manufacturer rating is check
   - The 0.33x stall estimate, where used, is a heuristic rather than a measured thermal rat
   - The linear torque-speed envelope is a screening model, not a measured performance curve

4. Project Reference Index
   - Part ID: AK60-6 | Source Document: ak60-6.pdf | Spec Table: Page 1