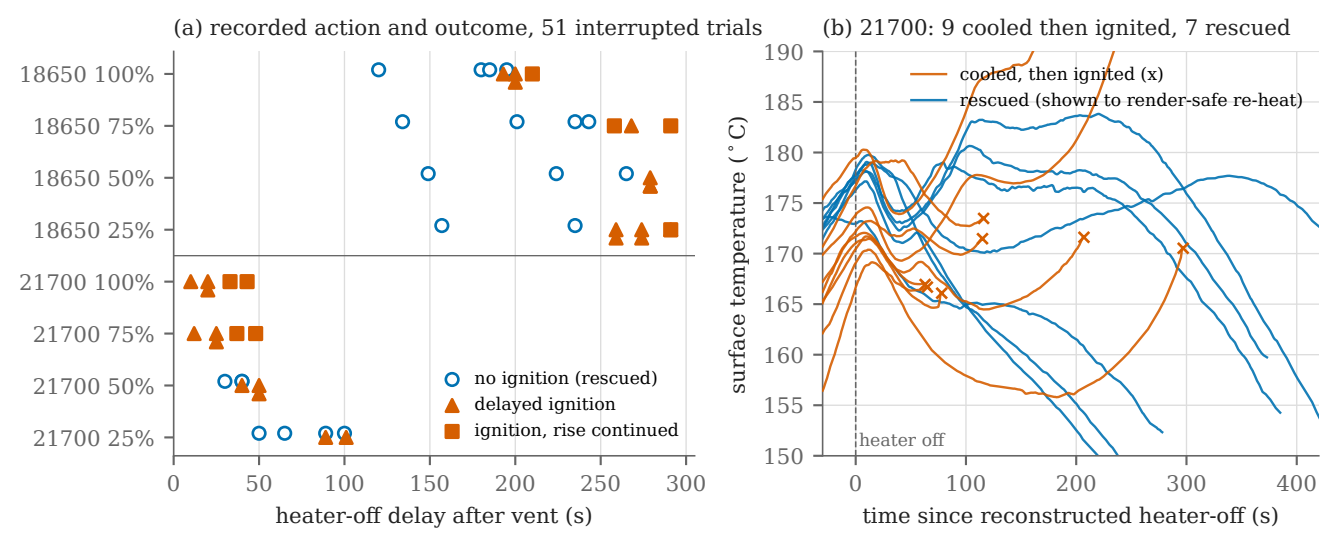
(a) recorded action and outcome, 51 interrupted trials
18650 100%
18650 75%
18650 50%
18650 25%
21700 100%
21700 75%
21700 50%
21700 25%
no ignition (rescued)
delayed ignition
ignition, rise continued
0
50
100
150
200
250
300
heater-off delay after vent (s)
(b) 21700: 9 cooled then ignited, 7 rescued
cooled, then ignited (x)
rescued (shown to render-safe re-heat)
heater off
surface temperature (°C)
190
185
180
175
170
165
160
155
150
0
100
200
300
400
time since reconstructed heater-off (s)