

Battery Charger

⚠ Note: This content is to prevent damage to the user's safety and property in advance. Please read the following carefully and use it correctly.



Battery Specifications


Powering your devices safely and efficiently

- The table below provides details of the RB-Y1 charger.

General Properties	Value
Output Voltage Adj. Range	46.1 ~ 60.5V
Output Current Adj. Range	5.2 ~ 10.5A
Input Voltage Range	85 ~ 264VAC / 120 ~ 370VDC


General Properties	Value
Input Frequency Range	47 ~ 63Hz
Input AC Current (Typ.)	7A / 115VAC, 3.3A / 230VAC, 2.9A / 277VAC
Working Temp.	-40 ~ +70°C

Charging Curve

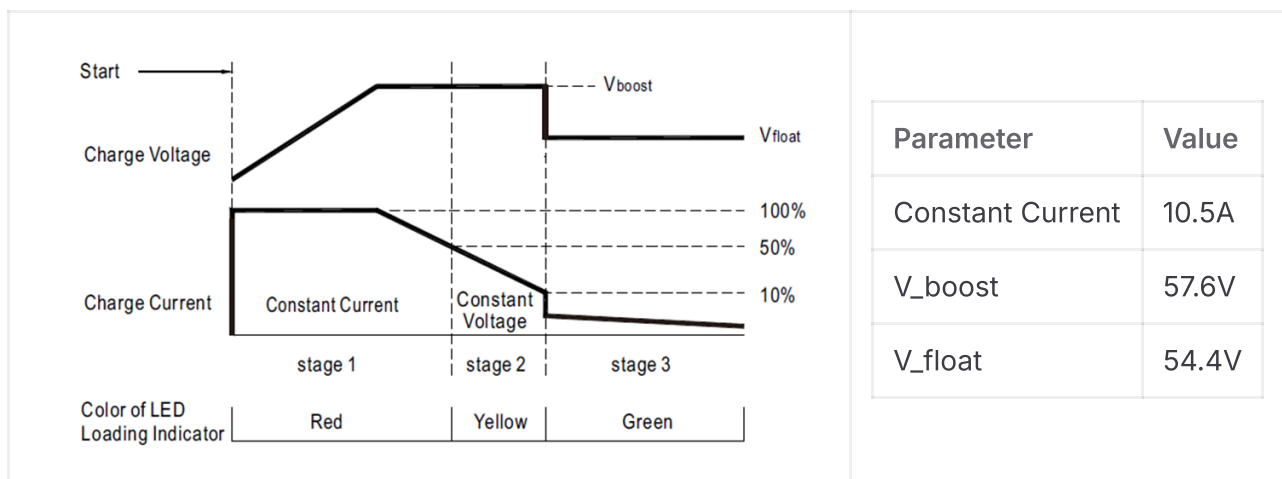

Mechanical Specifications

- Charger Drawing: [Download](#)

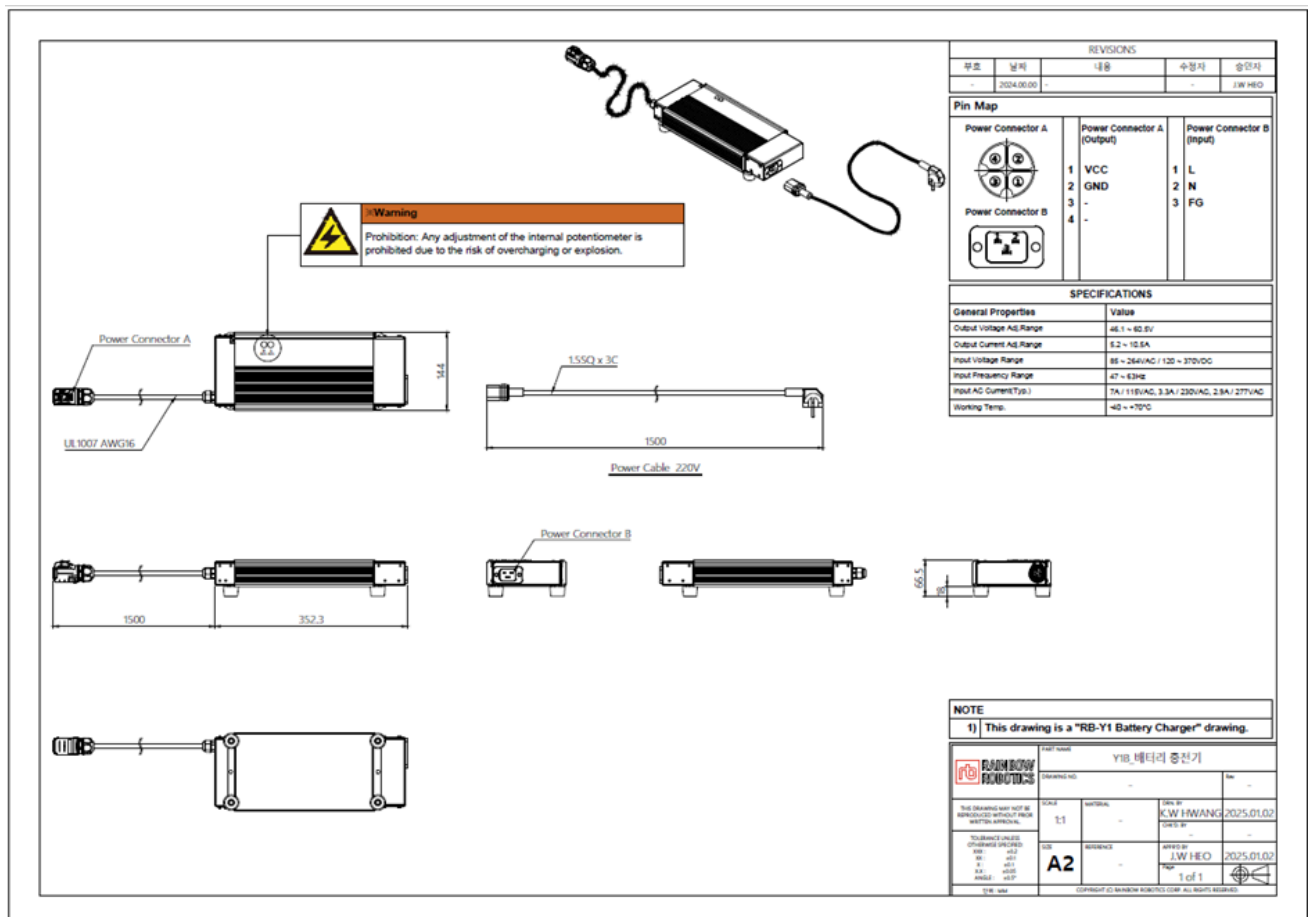

Previous page
Electrical Part

Next page
Software-Architecture

