Innovative Service Around the Globe YAGEO

DATA SHEET

MULTILAYER CERAMIC CAPACITORS

CC Series

NP0

16V TO 100V

YAGEO

Product Specification – Jul 07, 2004 V.6 Supersedes Date of Mar. 12, 2004

SCOPE

This specification describes Yageo CC NP0 series chip capacitors.

ORDERING INFORMATION

Part number is identified by the series, size, tolerance, packing style, temperature coefficient, rated voltage and capacitance value.

CC ×××× × × **NPO** × **BN** ×××
(1) (2) (3) (4) (5)

(1) SIZE

0402 (1005)
0603 (1608)
0805 (2012)
1206 (3216)
1210 (3225)
1812 (4832)

(2) TOLERANCE

B = ±0.1pF
C = ±0.25pF
D = ±0.5pF
F = ±1%
G = ±2%
J = ±5%

(3) PACKING STYLE

R = 7" paper tape
K = 7" blister tape
P = 13" paper tape
F = 13" blister tape
C = Bulk case

(4) RATED VOLTAGE

7 = 16V
8 = 25V
9 = 50V
0 = 100V

(5) CAPACITANCE VALUE:

First two for significant figures and 3rd for number of zero
Letter "R" for decimal point

CONSTRUCTION

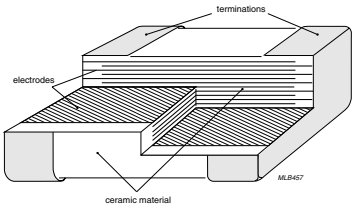

Fig. 1 Surface mounted multilayer ceramic capacitor construction

DIMENSION

For dimensions see Table 1

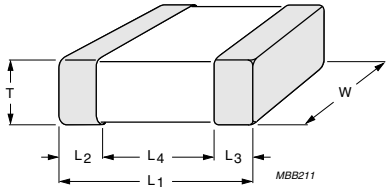

Fig. 2 Surface mounted multilayer ceramic capacitor dimension

Table 1

TYPE		CC0402	CC0603	CC0805	CC1206	CC1210	CC1812
L_1 (mm)		1.0±0.05	1.6±0.10	2.0±0.10	3.2±0.15	3.2±0.20	4.5±0.20
W (mm)		0.5±0.05	0.8±0.07	1.25±0.10	1.6±0.15	2.5±0.20	3.2±0.20
T (mm)	min.	0.45	0.73	0.50	0.50	0.50	0.50
	max.	0.55	0.87	1.35	1.35	1.80	1.80
L_2/L_3 (mm)	min.	0.15	0.20	0.25	0.25	0.25	0.25
	max.	0.30	0.50	0.75	0.75	0.75	0.75
L_4 (mm)	min.	0.40	0.60	0.55	1.40	1.40	2.20

CAPACITANCE RANGE & THICKNESS FOR 16V & 25V

Table 2

CAPACITANCE (pF)	16V 0402	16V 0603	25V 0402	25V 0603	25V 0805	25V 1206	25V 1210
150							
180			0.5±0.05				
220							
270	0.5±0.05						
330							
390							
470							
560							
680							
820				0.8±0.07			
1,000							
1,200							
1,500							
1,800		0.8±0.07					
2,200							
2,700							
3,300					0.85±0.1		
3,900					1.25±0.1		
4,700							
5,600							
6,800							
8,200						0.85±0.1	
10,000							
12,000							0.6±0.1
15,000							0.85±0.1
18,000							
22,000							1.15±0.1

CAPACITANCE RANGE & THICKNESS FOR 50V & 100V

Table 3

CAPACITANCE (pF)	50V 0402	0603	0805	1206	1210	1812	100V 0603	0805	1206	1210	1812
0.47											
0.56											
0.68											
0.82											
1.0											
1.2											
1.5											
1.8											
2.2											
2.7											
3.3											
3.9											
4.7											
5.6											
6.8											
8.2											
10	0.5±0.05	0.8±0.07	0.6±0.1	0.6±0.1							
12											
15											
18											
22											
27											
33											
39											
47							0.8±0.07	0.6±0.1	0.6±0.1		
56											
82											
100											
120											
150											
180											
220											

CAPACITANCE RANGE & THICKNESS FOR 50V & 100V (CONT.)

Table 4

CAPACITANCE (pF)	50V 0402	0603	0805	1206	1210	1812	100V 0603	0805	1206	1210	1812
270		0.8±0.07	0.6±0.1	0.6±0.1			0.8±0.07	0.6±0.1	0.6±0.1		
330											
390											
470											
560											
680											
820											
1,000											
1,200			0.85±0.1		0.6±0.1	0.6±0.1		0.85±0.1			
1,500											
1,800											
2,200			1.25±0.1					1.25±0.1			
2,700											
3,300				0.85±0.1					0.85±0.1		
3,900											
4,700											
5,600				1.15±0.1	0.85±0.1				1.15±0.1		
6,800											
8,200										0.85±0.1	
10,000											
12,000						0.85±0.1					0.85±0.1
15,000											
18,000						1.15±0.1					1.15±0.1
22,000											

THICKNESS CLASSES AND PACKING QUANTITY

Table 5

THICKNESS CLASSIFICATION (mm)	8mm TAPE WIDTH / AMOUNT PER REEL				12mm TAPE WIDTH / AMOUNT PER REEL	AMOUNT PER BULK CASE		
	Ø180mm, 7"		Ø330mm, 13"		Ø180mm, 7" Blister			
	Paper	Blister	Paper	Blister	1812	0402	0603	0805
0.5±0.05	10,000	---	50,000	---	---	50,000	---	---
0.6±0.1	4,000	---	20,000	---	---	---	---	10,000
0.8±0.07	4,000	---	15,000	---	---	---	15,000	---
0.85±0.1	4,000	---	15,000	---	---	---	---	8,000
1.15±0.1	---	3,000	---	10,000	---	---	---	---
1.25±0.1	---	3,000	---	10,000	---	---	---	5,000

ELECTRICAL CHARACTERISTICS

Table 6

CHARACTERISTICS	TEST CONDITIONS	REQUIREMENT
Operation temperature range	---	–55°C to +125°C
Temperature characteristic/coefficient (TC)	With respect to 20°C within operation temperature range	NP0=16V, 0±60ppm/K NP0>16V, 0±30ppm/K
Capacitance tolerance	With respect to 20°C C≤1000pF 1Vrms/1MHz C>1000pF 1Vrms/1KHz	C<5; ±0.1pF, ±0.25pF C≥5; ±0.25pF, ±0.5pF C≥10pF; ±2%, ±5%
Dissipation factor (D.F.)	With respect to 20°C C≤1,000pF 1Vrms/1MHz C>1,000pF 1Vrms/1KHz	C<10pF D.F. ≤10(3/C+0.7) $\times 10^{-4}$ or 30×10^{-4} whichever is less C≥10pF, D.F. ≤10×10^{-4}
Insulation resistance (IR)	At U_r (rated voltage) for 1 minute U_r >500V, at 500V(DC) for 1minute	R_{ins} >10GΩ or $R_{ins}\times C$≥500s whichever is less
Dielectric withstanding Voltage	At 2.5x U_r (for U_r ≤100V) 1.5x U_r +100V (for U_r >100V) for 5sec	No breakdown

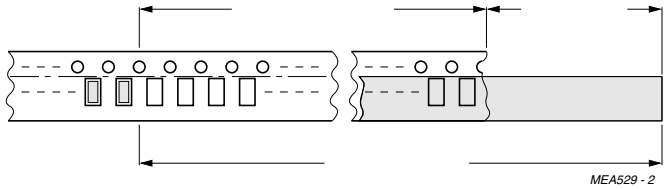
MEA529 - 2

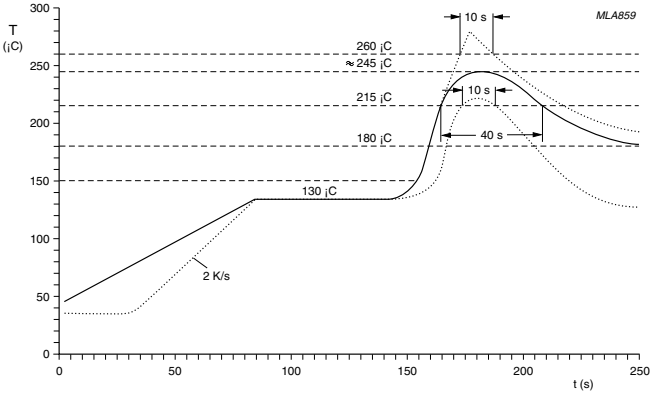
MLA859
T
(¡C)
300
250
200
150
100
50
0
260 ¡C
≈ 245 ¡C
215 ¡C
180 ¡C
130 ¡C
10 s
10 s
40 s
2 K/s
0
50
100
150
200
250
t (s)

TEST AND REQUIREMENT

Table 10

IEC384-10	TEST ITEMS	CONDITIONS	REQUIREMENTS
4.9	Bending	Bending rate 1mm/s, jig. radius 340mm	$\|\Delta C/C\| \leq 1\%$
4.10	Resistance to soldering heat	260±5°C for 10±0.5s in static solder bath	$\|\Delta C/C\|$ within 0.5% or 0.5pF whichever is greater
4.11	Solderability	235±5°C for 2±0.5s in a static solder bath	The termination shall be well tinned
4.12	Rapid change of temperature	–55°C to +125°C, 5 cycles	$\|\Delta C/C\|$ within 1% or 1pF, whichever is greater
4.14	Damp heat	At 40°C, 90 to 95% RH and U_r applied for 500 hours	$\|\Delta C/C\|$ within 2% or 1pF whichever is greater D.F. ≤2xspecified value IR≥2,500MΩ or RxC≥25s, whichever is less
4.15	Endurance	At upper category temperature 2x U_r applied (1.5x U_r for U_r >50V) for 1,000 hours	$\|\Delta C/C\|$ within 2% or 1pF whichever is greater D.F. ≤2xspecified value IR≥4,000MΩ or RxC≥40s, whichever is less

REVISION HISTORY

REVISION	DATE	CHANGE NOTIFICATION	DESCRIPTION
Version 06	Jul 07, 2005	-	- Thickness updated
Version 05	Mar 12, 2004	-	- Thickness and packing quantity amending
Version 04	Aug. 13, 2003	-	- Taping drawing amended
Version 03	Dec. 03, 2002	-	- New Yageo edition
Version 02	Jul. 04, 2002	-	-
Version 01			
Version 0			- First issue of this specification