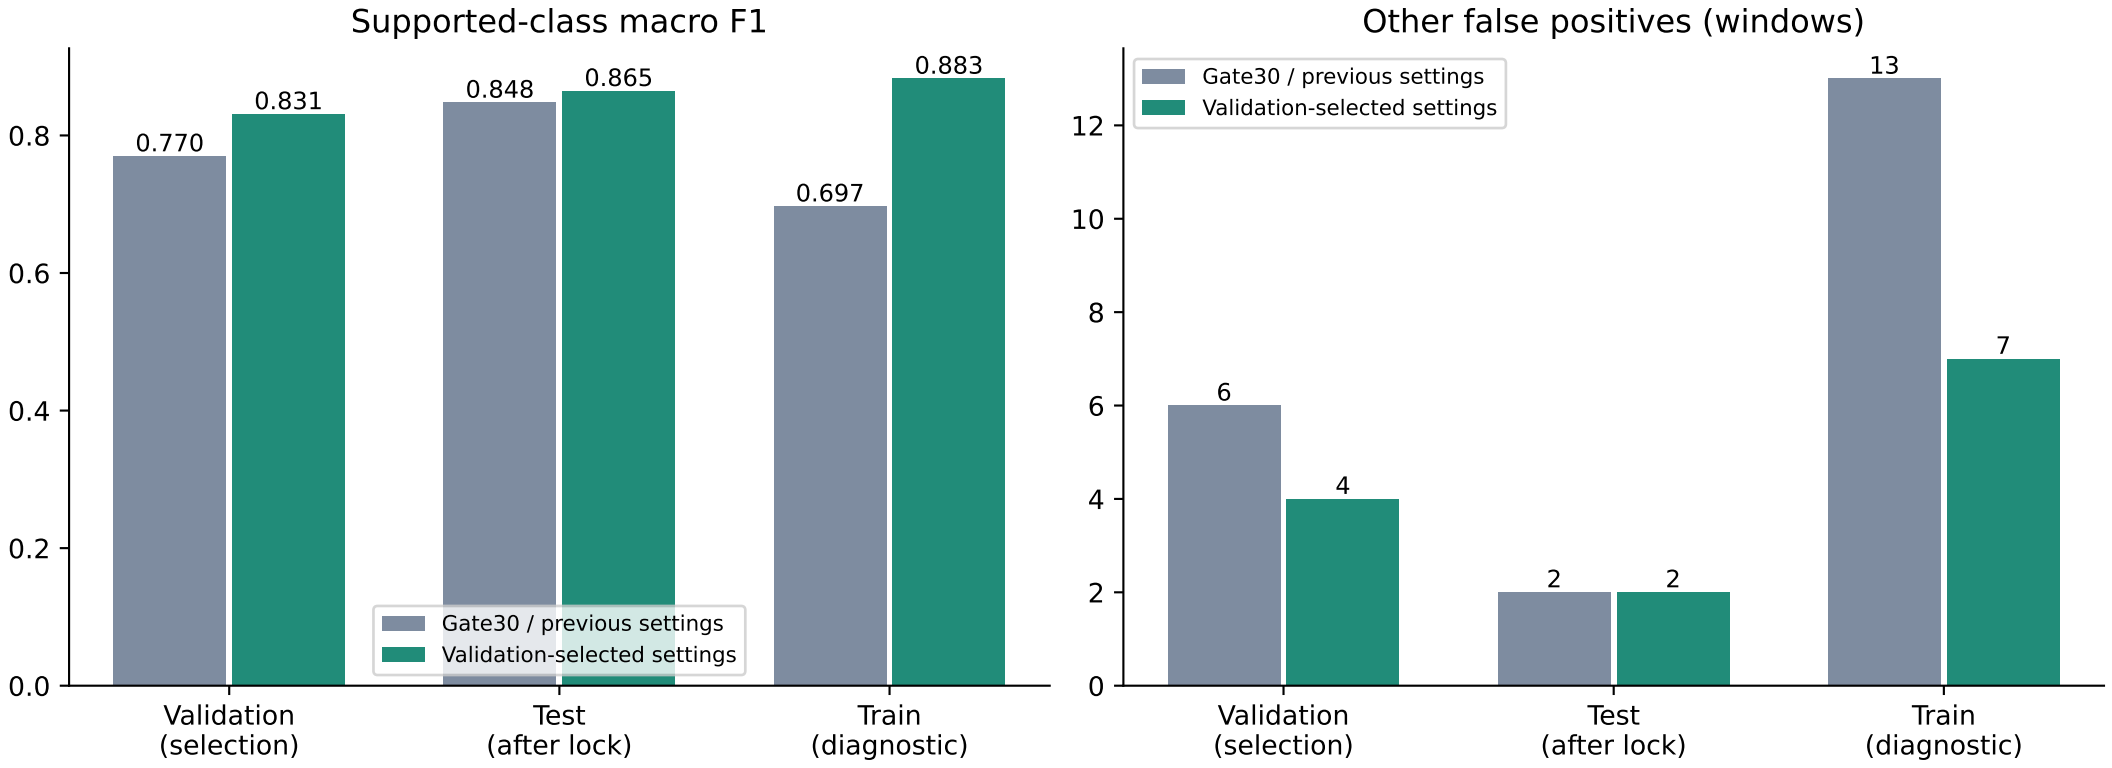
Supported-class macro F1
0.770
0.831
0.848
0.865
0.697
0.883
Gate30 / previous settings
Validation-selected settings
0.0
0.2
0.4
0.6
0.8
Validation (selection)
Test (after lock)
Train (diagnostic)
Other false positives (windows)
Gate30 / previous settings
Validation-selected settings
6
4
2
2
13
7
0
2
4
6
8
10
12
Validation (selection)
Test (after lock)
Train (diagnostic)