

Rockchip PX30 Linux SDK Quick Start

ID: RK-JC-YF-941

Release Version: V1.9.1

Release Date: 2023-04-20

Security Level: ☐Top-Secret ☐Secret ☐Internal ☒Public

DISCLAIMER

THIS DOCUMENT IS PROVIDED "AS IS". ROCKCHIP ELECTRONICS CO., LTD. ("ROCKCHIP") DOES NOT PROVIDE ANY WARRANTY OF ANY KIND, EXPRESSED, IMPLIED OR OTHERWISE, WITH RESPECT TO THE ACCURACY, RELIABILITY, COMPLETENESS, MERCHANTABILITY, FITNESS FOR ANY PARTICULAR PURPOSE OR NON-INFRINGEMENT OF ANY REPRESENTATION, INFORMATION AND CONTENT IN THIS DOCUMENT. THIS DOCUMENT IS FOR REFERENCE ONLY. THIS DOCUMENT MAY BE UPDATED OR CHANGED WITHOUT ANY NOTICE AT ANY TIME DUE TO THE UPGRADES OF THE PRODUCT OR ANY OTHER REASONS.

Trademark Statement

"Rockchip", "瑞芯微", "瑞芯" shall be Rockchip's registered trademarks and owned by Rockchip. All the other trademarks or registered trademarks mentioned in this document shall be owned by their respective owners.

All rights reserved. ©2023. Rockchip Electronics Co., Ltd.

Beyond the scope of fair use, neither any entity nor individual shall extract, copy, or distribute this document in any form in whole or in part without the written approval of Rockchip.

Rockchip Electronics Co., Ltd.

No.18 Building, A District, No.89, software Boulevard Fuzhou, Fujian, PRC

Website: www.rock-chips.com

Customer service Tel: +86-4007-700-590

Customer service Fax: +86-591-83951833

Customer service e-Mail: fae@rock-chips.com

Preface

Overview

The document describes the basic usage of the PX30 Linux SDK, aiming to help developers master the PX30 Linux SDK development package quickly.

Intended Audience

This document (this guide) is mainly intended for:

Technical support engineers

Software development engineers

Chipset and System Support

Chipset	Buildroot	Debian	Yocto	Kernel
PX30/PX30-S	2021.11	N/A	N/A	4.4/4.19/5.10

Revision History

Date	Version	Author	Revision History
2022-06-16	V1.0.0	WJL	Initial version.
2022-06-20	V1.8.0	WJL	Update version to V1.8.0
2022-09-20	V1.8.1	LinJianHua	Support Linux5.10 SDK
2022-11-20	V1.8.2	Caesar Wang	Update Linux Upgrade Instruction
2023-04-20	V1.9.1	WJL	Update the compilation instructions

Contents

Rockchip PX30 Linux SDK Quick Start

1. Set up an Development Environment
2. Software Development Guide
 - 2.1 Development Guide
 - 2.2 Chip Information
 - 2.3 Software Update History
3. Hardware Development Guide
4. SDK Building Introduction
 - 4.1 SDK Project Directory Introduction
 - 4.2 SDK Board Level Configuration
 - 4.3 Compilation Commands
 - 4.4 Automatic Build
 - 4.5 Build and package each module
 - 4.5.1 U-boot Build
 - 4.5.2 Kernel Build
 - 4.5.3 Recovery Build
 - 4.5.4 Buildroot Build
 - 4.5.5 Debian Building
 - 4.5.6 Yocto Build
 - 4.5.7 Cross-compilation
 - 4.5.7.1 Cross-compile toolchains inside SDK
 - 4.5.7.2 Cross-compilation of Buildroot
 - 4.5.7.3 Build Modules in Buildroot
 - 4.5.8 Firmware Package
5. Upgrade Introdution
 - 5.1 Windows Upgrade Introduction
 - 5.2 Linux Upgrade Instruction
 - 5.3 System Partition Introduction
6. PX30 SDK Firmware

1. Set up an Development Environment

It is recommended to use Ubuntu 20.04 for compilation. Other Linux versions may need to adjust the software package accordingly. In addition to the system requirements, there are other hardware and software requirements.

Hardware requirements: hard disk space should be greater than 40G. If you do multiple builds, you will need more hard drive space.

Software requirements: Ubuntu 20.04 64-bit system.

Please install software packages with below commands to setup SDK compiling environment:

```
sudo apt-get install binfmt-support bison bzip2 chrpath cmake \
  cpp-aarch64-linux-gnu device-tree-compiler diffstat expat expect \
  fakeroot flex g++ g++-aarch64-linux-gnu gawk gcc gcc-multilib git \
  g++-multilib gpgv2 libgucharmap-2-90-dev liblz4-tool libssl-dev live-build \
  make ncurses-dev patchelf qemu-user-static ssh texinfo unzip
```

It is recommended to use Ubuntu 20.04 system or higher version for development. If you encounter an error during compilation, you can check the error message and install the corresponding software packages accordingly.

Considering the time cost of building the development environment, we also provide a cross-compiler docker image for customer verification, shortening the time required to build the compilation environment.

Rockchip_Developer_Guide_Linux_Docker_Deploy_EN.pdf is released with the SDK, available under docs/ApplicationNote , and will be constantly improved and updated.

The compatibility test results of the Docker image are as follows:

Distribution	Docker Version	Image import	Firmware compile
ubuntu 22.04	20.10.12	pass	pass
ubuntu 21.10	20.10.12	pass	pass
ubuntu 21.04	20.10.7	pass	pass
ubuntu 18.04	20.10.7	pass	pass
fedora35	20.10.12	pass	NR (not run)

2. Software Development Guide

2.1 Development Guide

Aiming to help engineers get started with SDK development and debugging faster, *Rockchip_Developer_Guide_Linux_Software_CN.pdf* is released with the SDK, please refer to the documents under the project's docs/ directory, which will be constantly improved and updated.

2.2 Chip Information

Aiming to help engineers get started with PX30 SDK development and debugging faster, We have released *Rockchip PX30-S Datasheet V1.0-20220301.pdf* with the SDK.

2.3 Software Update History

Software release version upgrade can be checked through project xml file by the following command:

```
# Linux4.4 SDK
.repo/manifests$ realpath px30_linux_release.xml
# e.g.:printf version v1.8.0, update time on 20220620
<SDK>/.repo/manifests/px30_linux_release_v1.8.0_20220620.xml

# Linux4.19 SDK
.repo/manifests$ realpath px30_linux4.19_release.xml
# e.g.:printf version v1.2.0, update time on 20220620
<SDK>/.repo/manifests/px30_linux4.19_release_v1.2.0_20220620.xml

# Linux5.10 SDK
.repo/manifests$ realpath px30_linux5.10_release.xml
# e.g.:printf version v1.1.0, update time on 20230420
<SDK>/.repo/manifests/px30_linux5.10_release_v1.1.0_20230420.xml
```

Software release version updated information can be checked through the project text file by the following command:

```
# Linux4.4 SDK
.repo/manifests$ cat PX30_Linux_SDK_Release_Note.md

# Linux4.19 SDK
.repo/manifests$ cat PX30_Linux4.19_SDK_Release_Note.md

# Linux5.10 SDK
.repo/manifests$ cat PX30_Linux5.10_SDK_Release_Note.md
```

Or refer to the project directory:

```
# Linux4.4 SDK
<SDK>/docs/PX30/PX30_Linux_SDK_Release_Note.md

# Linux4.19 SDK
<SDK>/docs/PX30/PX30_Linux4.19_SDK_Release_Note.md

# Linux5.10 SDK
<SDK>/docs/PX30/PX30_Linux5.10_SDK_Release_Note.md
```

3. Hardware Development Guide

Please refer to user guides in the project directory for hardware development:

PX30 hardware design guide:

```
<SDK>/docs/PX30/Hardware/Rockchip_PX30_Hardware_Design_Guide_V1.3_20191206_EN.pdf
```

PX30 EVB hardware development guide:

```
<SDK>/docs/PX30/Hardware/Rockchip_PX30_User_Manual_EVB_V1.1_EN.pdf
```

4. SDK Building Introduction

4.1 SDK Project Directory Introduction

There are app, buildroot, device, docs, external, kernel, output, prebuilts, rkbin, tools, u-boot and other directories in the project directory. Each directory or its sub-directories will correspond to a git project, and the commit should be done in the respective directory.

- app: store application APPs with Demo.
- buildroot: root file system based on Buildroot (2021.11).
- device/rockchip: store board-level configuration for each chip and some scripts and prepared files for building and packaging firmware.
- docs: stores development guides, platform support lists, tool usage, Linux development guides, and so on.
- external: stores some third-party libraries, including audio, video, network, recovery and so on.
- kernel: soft links to kernel code directories, linked to kernel-5.10 directories by default.
- prebuilts: stores cross-building toolchain.
- rkbin: stores Rockchip Binary and tools.
- rockdev: stores building output firmware.
- tools: stores some commonly used tools under Linux and Windows system.
- u-boot: store U-Boot code developed based on v2017.09 version.
- yocto: stores the root file system developed based on Yocto 4.0.

4.2 SDK Board Level Configuration

Enter the project `<SDK>/device/rockchip/px30` directory:

Board level configuration	Note
rockchip_defconfig	Default
rockchip_px30_evb_ddr3_v10_defconfig rockchip_px30_evb_ddr3_v10_32bit_defconfig	Suitable for PX30 EVB V10 development board with DDR3
rockchip_px30_evb_ddr3_v11_defconfig rockchip_px30_evb_ddr3_v11_32bit_defconfig	Suitable for PX30 EVB V11 development board with DDR3
rockchip_px30_evb_ddr4_v10_defconfig rockchip_px30_evb_ddr4_v10_32bit_defconfig	Suitable for PX30 EVB V10 development board with DDR4
rockchip_px30_robot64_defconfig rockchip_px30_robot64_no_gpu_defconfig	Suitable for PX30 Robot development board with tiny system

The first way:

Add board configuration file behind `./build.sh` , for example:

Select the board configuration of **PX30 EVB V10 development board with DDR3:**

```
./build.sh rockchip_px30_evb_ddr3_v10_defconfig
or
./build.sh rockchip_px30_evb_ddr3_v10_32bit_defconfig
```

Select the board configuration of **PX30 EVB V11 development board with DDR3:**

```
./build.sh rockchip_px30_evb_ddr3_v11_defconfig
or
./build.sh rockchip_px30_evb_ddr3_v11_32bit_defconfig
```

Select the board configuration of the **PX30 EVB V10 development board with DDR4:**

```
./build.sh rockchip_px30_evb_ddr4_v10_defconfig
or
./build.sh rockchip_px30_evb_ddr4_v10_32bit_defconfig
```

Select the board configuration of the **PX30 Robot development board with tiny system:**

```
./build.sh rockchip_px30_robot64_defconfig
or
./build.sh rockchip_px30_robot64_no_gpu_defconfig
```

The second way:

```
px30$ ./build.sh lunch

You're building on Linux
Lunch menu...pick a combo:

1. rockchip_defconfig
2. rockchip_px30_evb_ddr3_v10_32bit_defconfig
3. rockchip_px30_evb_ddr3_v10_defconfig
4. rockchip_px30_evb_ddr3_v11_32bit_defconfig
```

```
5. rockchip_px30_evb_ddr3_v11_defconfig
6. rockchip_px30_evb_ddr4_v10_32bit_defconfig
7. rockchip_px30_evb_ddr4_v10_defconfig
8. rockchip_px30_robot64_defconfig
9. rockchip_px30_robot64_no_gpu_defconfig
Which would you like? [1]:
...
```

4.3 Compilation Commands

Execute the command in the root directory: `./build.sh -h|help`

```
px30$ ./build.sh -h
Usage: build.sh [OPTIONS]
Available options:
chip                - choose chip
lunch               - choose defconfig
*_defconfig         - switch to specified defconfig
    Available defconfigs:
    rockchip_defconfig
    rockchip_px30_evb_ddr3_v10_32bit_defconfig
    rockchip_px30_evb_ddr3_v10_defconfig
    rockchip_px30_evb_ddr3_v11_32bit_defconfig
    rockchip_px30_evb_ddr3_v11_defconfig
    rockchip_px30_evb_ddr4_v10_32bit_defconfig
    rockchip_px30_evb_ddr4_v10_defconfig
    rockchip_px30_robot64_defconfig
    rockchip_px30_robot64_no_gpu_defconfig
olddefconfig        - resolve any unresolved symbols in .config
savedefconfig        - save current config to defconfig
menuconfig          - interactive curses-based configurator
kernel-4.19          - build kernel 4.19
kernel-4.4           - build kernel 4.4
kernel-5.10          - build kernel 5.10
kernel              - build kernel
modules             - build kernel modules
linux-headers        - build linux-headers
loader              - build loader (uboot|spl)
uboot               - build u-boot
spl                 - build spl
uefi                - build uefi
wifibt              - build Wifi/BT
rootfs              - build default rootfs
buildroot            - build buildroot rootfs
yocto               - build yocto rootfs
debian              - build debian rootfs
recovery            - build recovery
pcba                - build PCBA
security_check       - check conditions for security features
createkeys          - build secureboot root keys
security_uboot       - build uboot with security paramter
security_boot        - build boot with security paramter
security_recovery    - build recovery with security paramter
security_rootfs      - build rootfs and some relevant images with security paramter
(just for dm-v)
```



```

firmware      - generate and check firmwares
updateimg     - build update image
otapackage    - build OTA update image
sdpackage     - build SDcard update image
all           - build all basic image
save          - save images and build info
allsave       - build all & firmware & updateimg & save
cleanall      - cleanup
post-rootfs   - trigger post-rootfs hook scripts
shell         - setup a shell for developing
help          - usage

```

Default option is 'allsave'.

4.4 Automatic Build

Enter root directory of project directory and execute the following commands to automatically complete all build:

```

# "./build.sh" and "./build.sh allsave" commands have the same effect
# "./build.sh" completes the following actions in order:
#     1/ "./build.sh all" will build u-boot, kernel, rootfs, recovery.
#         the compiled image is stored in the output/firmware directory.
#     2/ "./build.sh firmware" will package oem, userdata.
#         the packaged image is stored in the output/firmware directory.
#     3/ "./build.sh updateimg" will package all image into update.img.
#         update.img is stored in the output/firmware directory.
#     4/ "./build.sh save" will save the firmware, logs, patches, and
#         configuration of compilation.
#         the above will be stored in the output/$defconfig directory, $defconfig
#         is the name of the compilation configuration used.
./build.sh all

```

It is Buildroot by default, you can specify rootfs by setting the environment variable RK_ROOTFS_SYSTEM. There are three types of system for RK_ROOTFS_SYSTEM: buildroot, Debian, and yocto.

For example, if you need debain, you can generate it with the following command:

```

$export RK_ROOTFS_SYSTEM=debian
$./build.sh

```

4.5 Build and package each module

4.5.1 U-boot Build

```

### U-Boot build command
./build.sh uboot

```

4.5.2 Kernel Build

```
### Kernel build command
./build.sh kernel
```

4.5.3 Recovery Build

```
### Recovery build command
./build.sh recovery
```

Note: Recovery is a unnecessary function, some board configuration will not be set

4.5.4 Buildroot Build

Enter project root directory and run the following commands to automatically complete compiling and packaging of Rootfs.

```
./build.sh rootfs
```

After build, rootfs.ext4 is generated in Buildroot directory “output/rockchip_chipset/images”.

4.5.5 Debian Building

```
./build.sh debian
```

Or enter debian/ directory:

```
cd debian/
```

Please refer to the readme.md in the directory for further building and Debian firmware generation.

(1) Building base Debian system

```
sudo apt-get install binfmt-support qemu-user-static live-build
sudo dpkg -i ubuntu-build-service/packages/*
sudo apt-get install -f
```

Build 64 bit Debian:

```
RELEASE=buster TARGET=desktop ARCH=arm64 ./mk-base-debian.sh
```

After building, linaro-buster-alip-xxxxx-1.tar.gz (xxxxx is timestamp generated) will be generated in “debian”:

FAQ:

- If you encounter the following problem during above building:

```
noexec or nodev issue /usr/share/debootstrap/functions: line 1450:
.../rootfs/ubuntu-build-service/buster-desktop-arm64/chroot/test-dev-null:
Permission denied E: Cannot install into target '/rootfs/ubuntu-build-
service/buster-desktop-arm64/chroot' mounted with noexec or nodev
```

Solution:

```
mount -o remount,exec,dev xxx (xxx is the project directory), and then rebuild
```

In addition, if there are other building issues, please check firstly that the building system is not ext2/ext4.

- Because building Base Debian requires to access to foreign websites, and when domestic networks access foreign websites, download failures often occur:

The live build is used in Debian10, you can configure like below to change the image source to domestic:

```
+++ b/ubuntu-build-service/buster-desktop-arm64/configure
@@ -11,6 +11,11 @@ set -e
echo "I: create configuration"
export LB_BOOTSTRAP_INCLUDE="apt-transport-https gnupg"
lb config \
+ --mirror-bootstrap "https://mirrors.tuna.tsinghua.edu.cn/debian" \
+ --mirror-chroot "https://mirrors.tuna.tsinghua.edu.cn/debian" \
+ --mirror-chroot-security "https://mirrors.tuna.tsinghua.edu.cn/debian-security" \
+ --mirror-binary "https://mirrors.tuna.tsinghua.edu.cn/debian" \
+ --mirror-binary-security "https://mirrors.tuna.tsinghua.edu.cn/debian-security"
--apt-indices false \
--apt-recommends false \
--apt-secure false \
```

If the package cannot be downloaded for other network reasons, there are pre-build packages shared from the following links, put it in the current directory, and then do the next step directly.

- [Debian10 Base 32bit](#)
- [Debian10 Base 64bit](#)

(2) Building rk-debian rootfs

Build 64bit Debian:

```
VERSION=debug ARCH=arm64 ./mk-rootfs-buster.sh
```

(3) Creating the ext4 image(linaro-rootfs.img)

```
./mk-image.sh
```

The linaro-rootfs.img will be generated.

4.5.6 Yocto Build

Enter project root directory and execute the following commands to automatically complete compiling and packaging Rootfs.

PX30 EVB boards:

```
./build.sh yocto
```

After compiling, rootfs.img is generated in yocto directory “/build/lastest”.

FAQ:

If you encounter the following problem during above compiling:

```
Please use a locale setting which supports UTF-8 (such as LANG=en_US.UTF-8).
Python can't change the filesystem locale after loading so we need a UTF-8
when Python starts or things won't work.
```

Solution:

```
locale-gen en_US.UTF-8
export LANG=en_US.UTF-8 LANGUAGE=en_US.en LC_ALL=en_US.UTF-8
```

Or refer to [setup-locale-python3](#). The image generated after compiling is in “yocto/build/lastest/rootfs.img”. The default login username is root.

Please refer to [Rockchip Wiki](#) for more detailed information of Yocto.

4.5.7 Cross-compilation

4.5.7.1 Cross-compile toolchains inside SDK

Directory	Introduction
prebuilts/gcc/linux-x86/aarch64/gcc-arm-10.3-2021.07-x86_64-aarch64-none-linux-gnu	gcc arm 10.3 64bit toolchain

4.5.7.2 Cross-compilation of Buildroot

If you need to compile individual modules or third-party applications, you need to configure the cross-compilation environment. For example, PX30, whose cross-compilation tool is located in the `buildroot/output/rockchip_px30_64/host/usr` directory, needs to set the `bin/` directory of the tool and the `aarch64-buildroot-linux-gnu/bin/` directory as environment variables, and execute the script of automatically configuring environment variables in the top-level directory:

```
source envsetup.sh
```

Enter the command to view:

```
cd buildroot/output/rockchip_px30_64/host/usr/bin
./aarch64-linux-gcc --version
```

Then the following logs are printed:

```
aarch64-linux-gcc.br_real (Buildroot -g61d86e7108) 11.3.0
```

4.5.7.3 Build Modules in Buildroot

For example, for the rockchip-test module, commonly used build commands are as follows:

- Build rockchip-test

```
SDK$make rockchip-test
```

- Rebuild rockchip-test

```
SDK$make rockchip-test-rebuild
```

- delete rockchip-test

```
SDK$make rockchip-test-dirclean
or
SDK$rm -rf buildroot/output/rockchip_px30_64/build/rockchip-test-master
```

4.5.8 Firmware Package


After compiling various parts of Kernel, U-Boot, Recovery, Rootfs above, enter root directory of project directory and run the following command to automatically complete all firmware packaged into rockdev directory:

Firmware generation:

```
./build.sh firmware
```

5. Upgrade Introduction

Interfaces layout of PX30 EVB board are showed as follows:

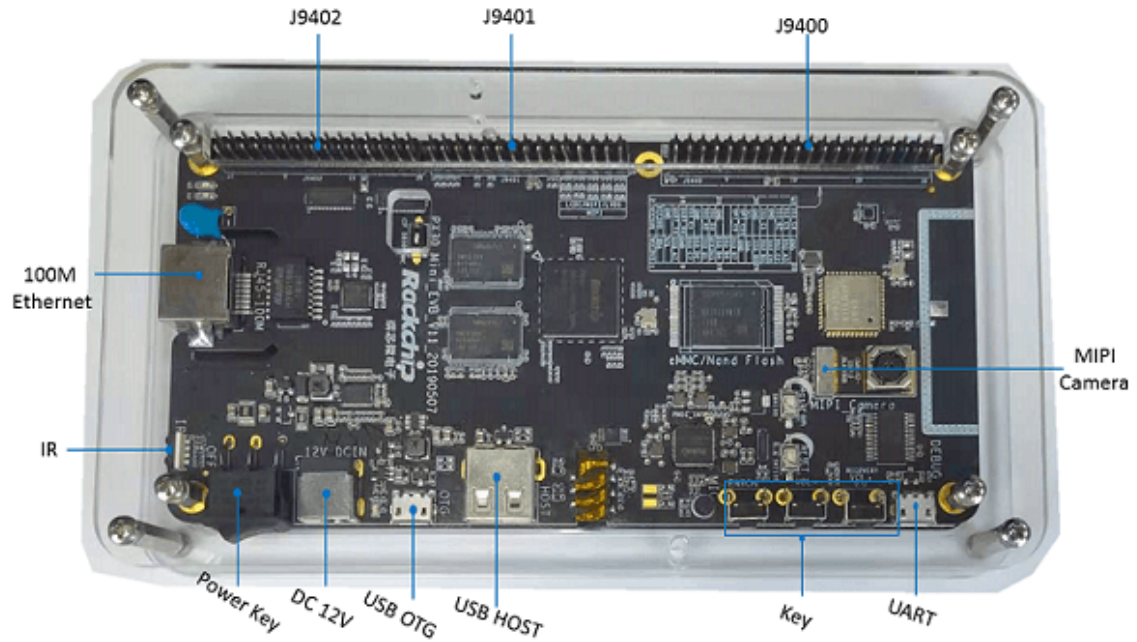


5.1 Windows Upgrade Introduction

SDK provides windows upgrade tool (this tool should be V2.92 or later version) which is located in project root directory:

```
tools/windows/RKDevTool
```

As shown below, after compiling the corresponding firmware, device should enter MASKROM or BootROM mode for update. After connecting USB cable, long press the button “MASKROM” and pressreset button “RST” at the same time and then release, device will enter MASKROM Mode. Then you should load the paths of the corresponding images and click “Run” to start upgrade. You canalso press the “recovery” button and press reset button “RST”then release to enter loader mode to upgrade. Partition offset and flashing files of MASKROM Mode are shown as follows (Note:Window PC needs to run the tool as an administrator):

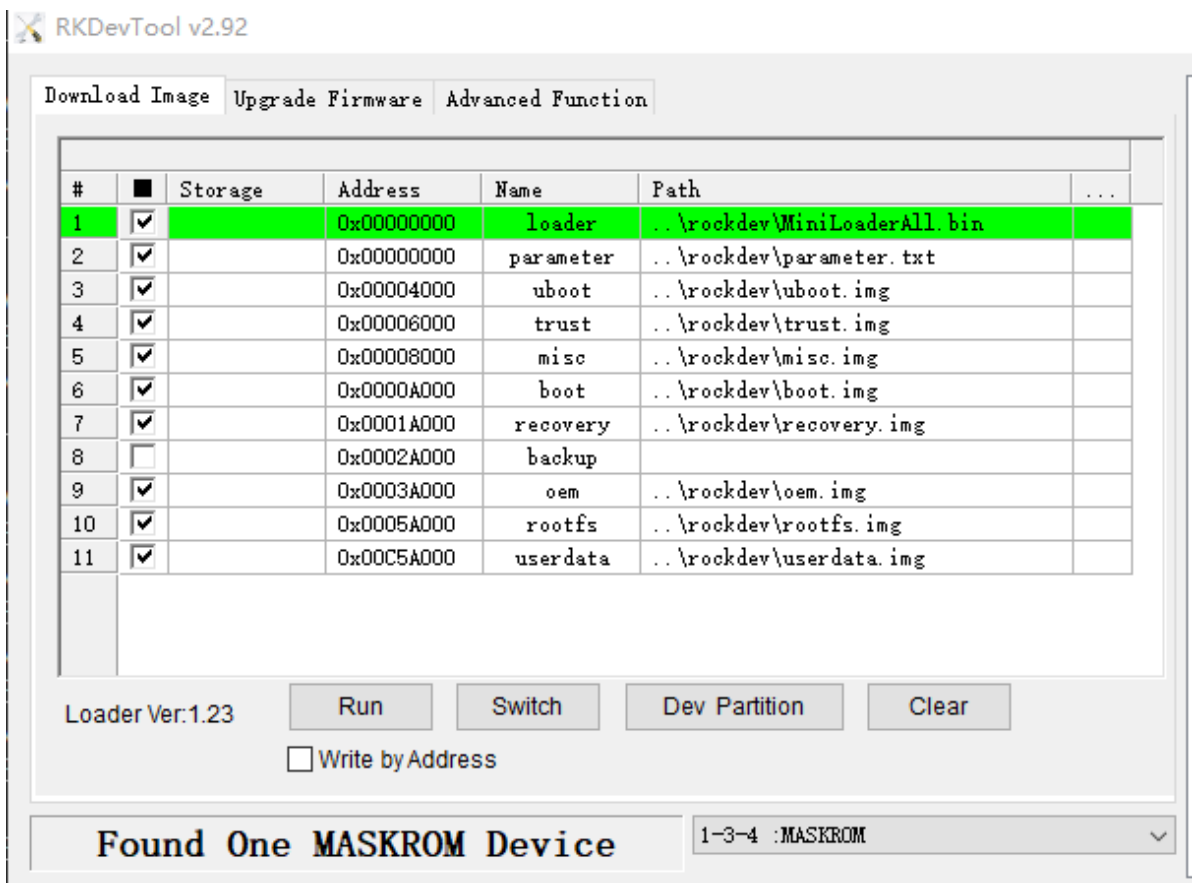

Note: Before upgrade, please install the latest USB driver, which is in the below directory:

<SDK>/tools/windows/DriverAssitant_v5.11.zip

5.2 Linux Upgrade Instruction

The Linux upgrade tool (Linux_Upgrade_Tool should be v2.1 or later versions) is located in “tools/linux” directory. Please make sure your board is connected to MASKROM/loader rockusb, if the compiled firmware is in rockdev directory, upgrade commands are as below:

```
sudo ./upgrade_tool ul rockdev/MiniLoaderAll.bin -noreset
sudo ./upgrade_tool di -p rockdev/parameter.txt
sudo ./upgrade_tool di -u rockdev/uboot.img
sudo ./upgrade_tool di -misc rockdev/misc.img
sudo ./upgrade_tool di -b rockdev/boot.img
sudo ./upgrade_tool di -recovery rockdev/recovery.img
sudo ./upgrade_tool di -oem rockdev/oem.img
sudo ./upgrade_tool di -rootfs rockdev/rootfs.img
sudo ./upgrade_tool di -userdata rockdev/userdata.img
sudo ./upgrade_tool rd
```

Or upgrade the whole update.img in the firmware

```
sudo ./upgrade_tool uf rockdev/update.img
```

Or in root directory, run the following command on the machine to upgrade in MASKROM state:

```
./rkflash.sh
```

5.3 System Partition Introduction

Default partition introduction (below is PX30 EVB reference partition):

Number	Start (sector)	End (sector)	Size	Name
1	16384	24575	4096K	uboot
2	24576	32767	4096K	trust
3	32768	40959	4096K	misc
4	40960	106495	32M	boot
5	106496	303104	32M	recovery
6	172032	237567	32M	bakcup
7	237568	368639	64M	oem
8	368640	12951551	6144M	rootfs
9	12951552	30535646	8585M	userdata

- uboot partition: for uboot.img built from uboot.
- misc partition: for misc.img built from recovery.
- boot partition: for boot.img built from kernel.
- recovery partition: for recovery.img built from recovery.
- backup partition: reserved, temporarily useless. Will be used for backup of recovery as in Android in future.
- oem partition: used by manufactor to store their APP or data, mounted in /oem directory
- rootfs partition: store rootfs.img built from buildroot or debian.
- userdata partition: store files temporarily generated by APP or for users, mounted in /userdata directory

6. PX30 SDK Firmware

- Baidu Cloud Disk

[Buildroot](#)

[Debian](#)

[Yocto](#)

- Microsoft OneDriver

[Buildroot](#)

[Debian](#)

[Yocto](#)

