

120 kW

Dual-Connector DC EVSE

High-power DC charging platform



Smart Interaction

Connectable to RunCloud O&M Platform; supports remote fault diagnosis, remote firmware upgrade and remote reboot.



Flexible Power Configuration

The platform supports 120 kW single-connector and dual-connector variants; this datasheet page presents the dual-connector configuration.




Dual CCS2 Output

Two CCS2 output channels; maximum output current is specified per connector.



Connected Operation

OCPP 1.6J via 4G, with card/QR startup and optional 7-inch LCD HMI.

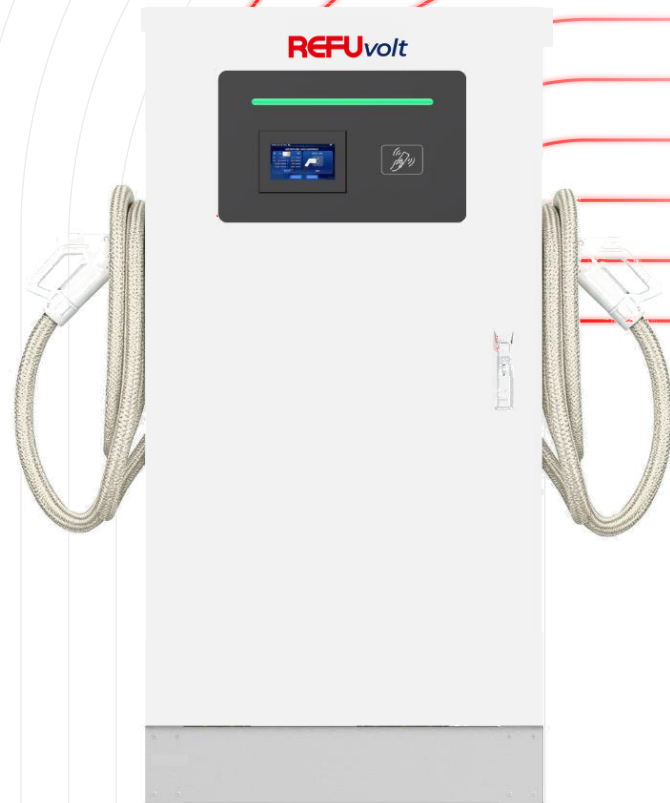

The 120 kW dual-connector DC EVSE combines two CCS2 output channels with OCPP 1.6J communication over 4G.



Electrical Output

- Rated power: 120 kW.
- Output voltage range: 150–1000 V DC.
- Two CCS2 output channels.



Installation

- Floor-standing installation; IP55.
- Operating temperature: -25°C to +50°C.
- Dimensions include the 100 mm base.



Protection

- Card swiping and QR-code startup.
- OCPP 1.6J communication over 4G.
- Integrated electrical and emergency protections.

SYSTEM POWER

Rated power	120 kW
-------------	--------

INPUT DATA

Rated input voltage	380 V AC
Input voltage range	380 V AC, ±15%
Rated input current	182.3 A
Rated Input Frequency:	60 Hz

OUTPUT DATA

Output voltage range	150–1000 V DC
Number of output channels	2 × CCS2
Max. output current per connector	250 A
Efficiency (above 50% load)	≥96%

USER INTERFACE & COMMUNICATION

Startup mode	Card swiping & QR-code scanning
HMI	Smartphone App; 7-inch LCD screen (optional)
Communication protocol	OCPP 1.6J
Communication interface	4G

GENERAL DATA

Installation method	Floor-standing
IP rating	IP55
Operating temperature	-25°C – +50°C
Relative humidity	5–95% RH (non-condensing)
Operating altitude	≤2000 m
Dimensions (W × D × H)	750 × 400 × 1450 mm, including 100 mm base

PROTECTION & COMPLIANCE

Protection functions	Under-voltage, over-voltage, over-current, phase, short-circuit, over-temperature, fault, access-control, emergency-stop, ground and leakage protection
Reference standards	EN IEC 61851-1; EN IEC 62196

60 & 80 kW Dual-Connector DC EVSE

Flexible DC charging platform



Smart Interaction

Connectable to RunCloud O&M Platform; supports remote fault diagnosis, remote firmware upgrade and remote reboot.



Flexible Power Configuration

The platform supports 60 kW and 80 kW single-connector and dual-connector variants; this datasheet page presents the dual-connector configuration.




Dual CCS2 Output

Two CCS2 output channels; maximum output current is specified per connector.



Connected Operation

OCPP 1.6J via 4G, with card/QR startup and optional 7-inch LCD HMI.

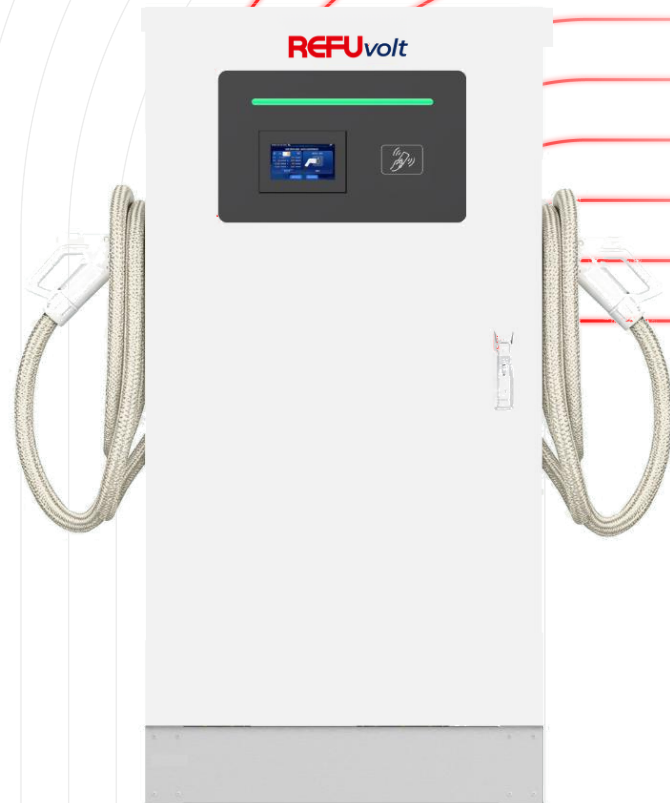

The 60 kW and 80 kW dual-connector DC EVSE configurations combine two CCS2 output channels with OCPP 1.6J communication over 4G.



Electrical Output

- Rated power: 60 kW / 80 kW.
- Output voltage range: 150–1000 V DC.
- Two CCS2 output channels.



Installation

- Floor-standing installation; IP55.
- Operating temperature: -25°C to +50°C.
- Dimensions include the 100 mm base.



Protection

- Card swiping and QR-code startup.
- OCPP 1.6J communication over 4G.
- Integrated electrical and emergency protections.

Model

60 kW

80 kW

SYSTEM & INPUT DATA

Rated power	60 kW	80 kW
Rated input voltage	380 V AC	380 V AC
Input voltage range	380 V AC, ±15%	380 V AC, ±15%
Rated input current	91.2 A	121.6 A
Rated Input Frequency:	60 Hz	60 Hz

OUTPUT DATA

Output voltage range	150–1000 V DC	150–1000 V DC
Number of output channels	2 × CCS2	2 × CCS2
Max. output current per connector	200 A	200 A
Efficiency (above 50% load)	≥95%	≥95%

USER INTERFACE & COMMUNICATION

Startup mode	Card swiping & QR-code scanning
HMI	Smartphone App; 7-inch LCD screen (optional)
Communication protocol	OCPP 1.6J
Communication interface	4G

GENERAL DATA

Installation method	Floor-standing
IP rating	IP55
Operating temperature	-25°C – +50°C
Relative humidity	5–95% RH (non-condensing)
Operating altitude	≤2000 m
Dimensions (W × D × H)	750 × 400 × 1450 mm, including 100 mm base

PROTECTION & COMPLIANCE

Protection functions	Under-voltage, over-voltage, over-current, phase, short-circuit, over-temperature, fault, access-control, emergency-stop, ground and leakage protection
Reference standards	EN IEC 61851-1; EN IEC 62196