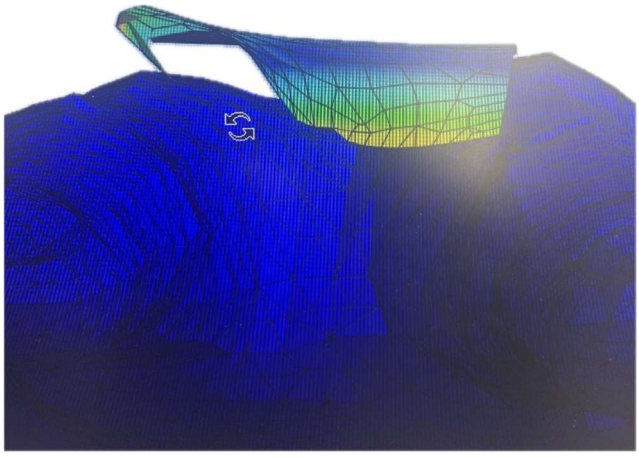
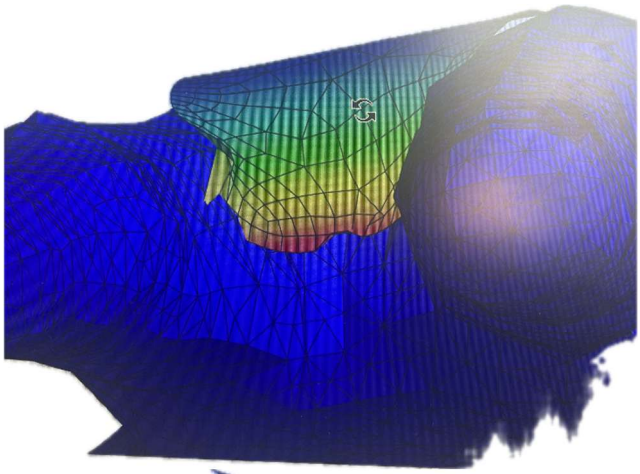
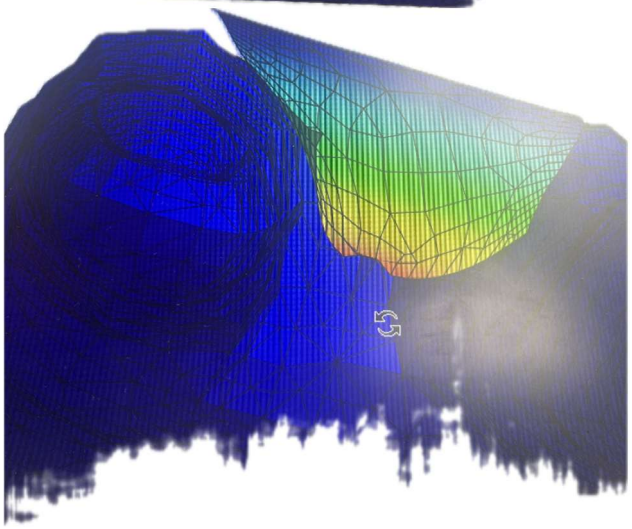
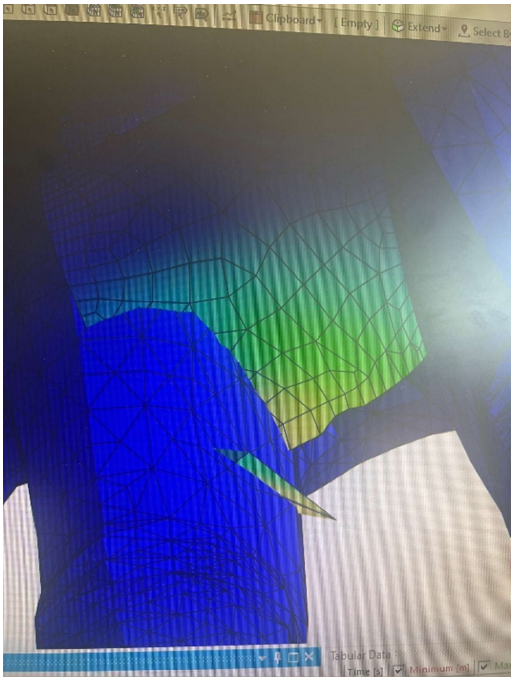
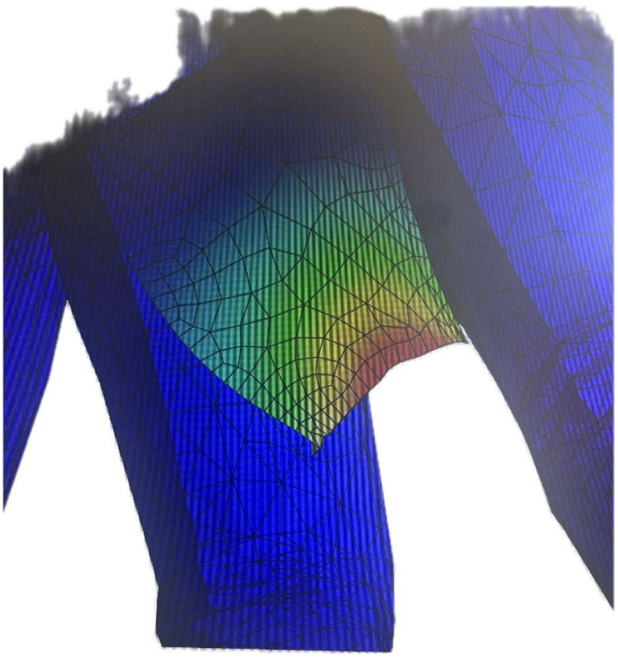
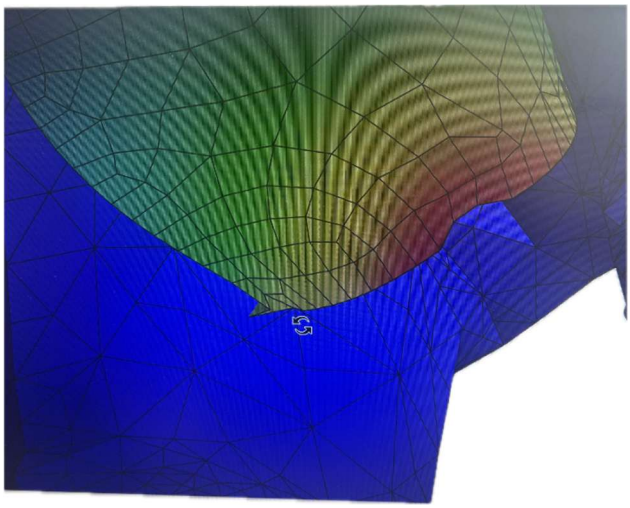
Applied Displacement: To determine the maximum displacement that can be reliably simulated without excessive element distortion or contact convergence failures.

X	Y	Z	result
0.009	-.01	.01	 Mesh distortion -> Bad result
0.009	-.01	0	 

			Contact error -> put larger X-coordinate
.0095	-.01	0	 Severe Error; Contact Penetration+ Excessive Element Distortion
.0091	-.01	0	

			 Best so far but still has some mess distortion

₩