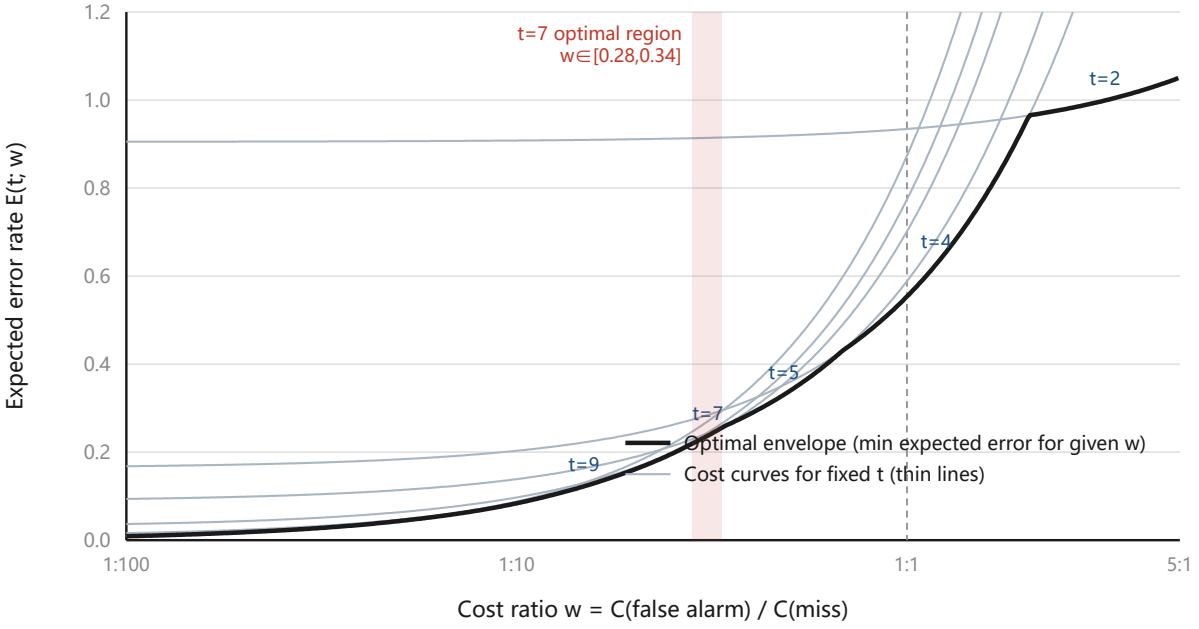
t=7 optimal region
w∈[0.28,0.34]
t=2
t=4
t=5
t=7
t=9
Optimal envelope (min expected error for given w)
Cost curves for fixed t (thin lines)
Expected error rate E(t; w)
1.2
1.0
0.8
0.6
0.4
0.2
0.0
1:100
1:10
1:1
5:1
Cost ratio w = C(false alarm) / C(miss)