

REHARNESS: Evidence-Driven Reconstruction of Device Drivers from C Source to Multi-Backend Targets

Anonymous Author(s)

Abstract

Translating a Linux device driver to another environment is difficult because its source interleaves operating-system integration with the device core. Rule-based systems such as C2Rust preserve this complete source structure, leaving the result OS-bound and its register protocol implicit; unconstrained LLMs can emit idiomatic target code but may hallucinate register behavior and stale kernel APIs. We present REHARNESS, a hybrid LLM translation framework with a bounded deterministic evidence boundary. A static extractor analyzes the complete Linux driver and records recognized hardware-facing behavior in a structured Register Interaction Sequence (RIS) contract covering register identity, width, order, path predicates, typed bus transactions, and buffer/state data flow. Backend plugins translate this evidence—never raw C source—into harness C, bare-metal C, Linux kernel modules, and Rust no_std; an LLM performs target-language emission, while deterministic compilation, receipt accounting (per-operation emission markers), primitive-shape checks, and exercised-path trace comparison provide bounded acceptance and repair. In our DesignWare APB SSI case study, 1844 Linux source lines yield 2092-line Linux, 1946-line bare-metal, and 1909-line Rust targets. Evaluation over 19 drivers and 3 multi-source modules separates deterministic baseline compilation from conservative artifact readiness. Two deterministic outputs pass QEMU value/trace oracles under the rule-based baseline, whose provenance is pinned by versioned manifest digests, source hashes, and a kernel-image SHA-256. The DesignWare artifact set passes all 18 items of a versioned, machine-checked artifact checklist; its recorded repair chain is partially human-supervised (disclosed per backend), and repeated bounded-budget trials of the constrained pipeline quantify exactly what the automated budgets alone

reproduce. Per-backend provenance and evidence are detailed in the evaluation.

CCS Concepts: • Computer systems organization → Embedded systems; • Software and its engineering → Software development techniques.

Keywords: device drivers, evidence intermediate representation, program analysis, code generation, LLM-assisted synthesis, Rust

ACM Reference Format:

Anonymous Author(s). 2026. REHARNESS: Evidence-Driven Reconstruction of Device Drivers from C Source to Multi-Backend Targets. In *Proceedings of ACM International Conference on Architectural Support for Programming Languages and Operating Systems (ASPLOS '27)*. ACM, New York, NY, USA, 18 pages. <https://doi.org/10.1145/nnnnnnnn.nnnnnnnn>

1 Introduction

Device drivers constitute a large fraction of operating-system code and account for a disproportionate share of kernel faults [1, 2]. Porting a driver to a userspace test harness, bare-metal firmware, another operating-system environment, or a memory-safe language is therefore a recurring systems problem. Although this task is commonly described as source-to-source conversion, a driver is not a homogeneous program. Its C source interleaves two concerns: *operating-system integration*, including resource acquisition, subsystem registration, callbacks, synchronization, and object lifetimes; and the *device core*, including register interactions, bus transactions, path conditions, and data movement between software state and the device. The latter contains hardware-facing behavior to preserve; the former is re-bound to the target but can still affect it through callbacks and state.

Existing translation approaches handle this mixture poorly. Deterministic translators such as C2Rust [9] preserve the source program structurally and reproducibly, and consequently carry Linux-specific framework code and its pointer-heavy representation into the target. The translated program remains tied to APIs and lifecycles that may not exist outside Linux, while the device protocol remains implicit in syntax. Direct large-language-model (LLM) translation takes the opposite approach: a model can restructure code and emit idiomatic target APIs, but it is also asked to infer which source behavior matters. For a driver, that authority is unsafe. A

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than the author(s) must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from permissions@acm.org.

ASPLOS '27, 2027,

© 2026 Copyright held by the owner/author(s). Publication rights licensed to ACM.

ACM ISBN 978-x-xxxx-xxxx-x/YY/MM

<https://doi.org/10.1145/nnnnnnnn.nnnnnnnn>

plausible candidate may add a DMA command, omit an interrupt acknowledgment, alter a register width, or reorder a buffer update while still compiling successfully.

The central question is therefore not whether translation should use rules or an LLM, but *where nondeterminism is allowed*. We present REHARNESS, a constrained hybrid translation pipeline that places the LLM between two deterministic stages. First, static analysis examines the complete Linux driver—including its framework glue—and records recognized hardware-relevant behavior in a structured evidence contract. The contract is expressed as a Register Interaction Sequence (RIS) together with device and binding specifications. It records recognized register identities, widths, operation order, path predicates, typed bus transactions, and selected software-state/data-flow effects. Second, an LLM translates this compact contract, rather than the original C source, into a backend-specific implementation. Third, deterministic compilation, receipt accounting, and exercised-path trace comparison decide whether the candidate is accepted within the modeled scope.

This separation is semantic, not a source transformation. REHARNESS does not delete Linux glue from the input driver or assume that framework code is irrelevant. The extractor analyzes the full translation units and retains any condition, state binding, call relationship, or resource fact that affects a hardware interaction. What it excludes from the cross-backend contract is framework structure for which no device-core effect is established. Consequently, the LLM is not asked to rediscover the boundary between Linux integration and hardware behavior, nor to reproduce every kernel idiom from memory.

Confining the model to the extracted contract also reduces the translation surface. In the DesignWare APB SSI case study, the pinned Linux source spans 1844 lines across its core, MMIO glue, and header, whereas the generated targets contain 2092 lines for Linux C (source and header), 1946 for bare-metal C (source and header), and 1909 for Rust `no_std`. These totals are comparable rather than smaller: 316 of the harness pair's lines are receipt and anchor markers that carry no functional content, and the proportion is similar across backends. What shrinks is not the raw line count but the semantic surface: each target implements the extracted device core plus only the adapter its backend requires, so the model never translates the source's framework integration glue. This is a reduction in the model's textual and semantic search space, not a deletion of source code, and it is not by itself a correctness argument; the smaller structured input and output may leave fewer opportunities to invent unrelated framework APIs or control flow, while the current verification gate rejects only deviations observable under the modeled contract and checked traces.

REHARNESS makes five contributions:

- **A device-core extraction pipeline** combining libclang AST analysis, flow-sensitive dataflow and taint tracking, and LLVM-IR evidence at -O1. It records recognized hardware-relevant evidence from full Linux driver sources and recovers MMIO operations hidden in header-inlined static inline accessors.
- **The RIS evidence language**, extending register operations with typed regmap/I2C/MFD transactions and functional-state operations (ValueBind, StateWrite, and OutputWrite) that record selected data flow from buffers to registers.
- **A constrained hybrid LLM translator** in which four backend plugins—harness C, bare-metal C, Linux kernel module, and Rust `no_std`—share one deterministic evidence contract. The LLM receives the contract and a fixed backend prompt, never the original C source.
- **A bounded verification gate** combining strict compilation, exactly-once accounting for recognized register operations, primitive-shape checks for covered C leaves, and exercised-path trace comparison with bounded structured repair. LLM output is treated as an untrusted candidate rather than an authoritative translation.
- **An artifact-backed evaluation** over 19 single-source drivers and 3 multi-source modules, including deterministic QEMU experiments, a four-backend DesignWare APB SSI artifact case with an 18-item checklist, and repeated bounded-budget trials of the constrained pipeline quantifying what the automated budgets alone reproduce. Deferred stronger experiments are listed explicitly with the artifact.

2 Motivation

2.1 Linux Drivers Interleave Two Translation Concerns

The hardware protocol of a Linux driver rarely appears as one isolated block. A probe callback acquires MMIO resources and initializes device registers; an interrupt callback combines framework state with status and acknowledgment accesses; a transfer callback advances software buffers around FIFO reads and writes. Register accessors may be macros or static inline functions in headers, while the callback that invokes them is registered through a subsystem-specific operations table. Device-core semantics and Linux integration are therefore interleaved across functions and translation units.

A useful cross-backend representation must separate these concerns without pretending that framework code has no effect. For example, the registration of a callback is Linux glue, but the binding between the callback field and the function determines the function's semantic role. Resource acquisition is platform-specific, but it establishes which state field is the MMIO base. A branch in a framework callback may

guard a register write and must therefore remain in the extracted contract. REHARNES analyzes these constructs as evidence while translating only the resulting device-core behavior. This distinction—analyzing the complete source but translating a smaller semantic contract—is the foundation of our hybrid approach.

2.2 Existing Translation Boundaries Are Insufficient

Deterministic source translation. C2Rust-style translation [9] maps C syntax and control flow to a target language using deterministic compiler transformations. This provides reproducibility and broad syntactic coverage, but it preserves the source program’s decomposition. A Linux driver’s `devm_*` resource calls, callback tables, locking idioms, error-unwind paths, intrusive containers, and kernel object lifetimes all survive in translated form. Outside Linux, many of those APIs do not exist; inside Rust, their pointer and aliasing structure often remains unsafe because the translator lacks the semantic distinction between an MMIO mapping, a software buffer, and an ordinary pointer. Section 6 measures this contrast on a concrete device: C2Rust cannot transpile the pinned kernel driver at all, and its transpilation of a de-kernelized stub carrying the same register protocol keeps that protocol implicit and unverifiable.

Compiler infrastructures such as LLVM [12] have made large-scale analysis and transformation of C programs routine, and code-pretrained models such as CodeT5 [22] improve learned code generation. Neither line of work, however, extracts the reusable device contract from a whole-program syntactic translation: macro-defined offsets, wrapper accessors, register-dependent branches, transaction APIs, and buffer/FIFO ordering remain encoded in target-language statements, so retargeting the result to another backend still requires a developer to recover the same hardware protocol manually. Determinism is valuable, but preserving every source-level concern is not the same as preserving the right cross-platform semantics. The prevalence of integration code is measurable: across the 19 driver corpus, only 9.5% of non-blank source lines are referenced by an emitted device-core operation; the remaining 90.5% split into framework entry bodies (32.6%), glue wrappers and other function bodies (25.7%), and file-scope declarations with registration boilerplate (32.2%) (Figure 3).

Direct LLM translation. A large language model takes the opposite approach: it can restructure code and select idiomatic target APIs, but direct translation delegates both semantic discovery and code emission to the model. The model must decide which callbacks matter, distinguish MMIO from ordinary memory, resolve macros and wrapper calls, preserve path guards, and reconstruct target-specific framework code at once. The complete Linux source also supplies

a large amount of subsystem boilerplate that invites memorized but version-incompatible APIs. Recent LLM-for-kernel work accordingly stays within bounded tasks—mining syscall specifications for kernel fuzzing [17] and curating driver-update datasets [18]—rather than whole-driver generation.

These failures are not merely stylistic. During development, a QEMU edu prompt that prohibited DMA and IRQ setup still produced a candidate that allocated DMA state and wrote `DMA_CMD|DMA_IRQ`; the resulting interrupt storm hung the guest and destroyed the feedback channel. Other candidates used obsolete kernel interfaces or produced different behavior from identical evidence. Compilation cannot detect a type-correct extra register write, a missing acknowledgment, or an incorrectly advanced transfer buffer. Direct LLM translation therefore lacks a stable authority for what the target must preserve.

A deterministic semantic boundary. Hybrid translators such as TransCoder [16] and CoTran [10] combine learned translation with feedback, but verification alone does not define what the model is allowed to reinterpret. If the model still receives the complete driver and owns the extraction of its meaning, the candidate search space includes arbitrary omissions and inventions. Tests can reject observed failures, but they do not by themselves provide a complete translation contract.

Earlier driver-analysis and synthesis systems provide deterministic foundations for such a boundary. SDV checks operating-system API protocols [3]; Coccinelle’s semantic patches automate collateral driver evolution at kernel scale [19, 20]; the LDV toolset verifies kernel-module API rule compliance [21]; Devil+ and Dingo/Termite synthesize drivers from explicit device/OS models [4–6, 11]; and KLEE or S2E explore paths when an executable environment exists [7, 8]. These approaches either target framework protocols, automate localized edits rather than translation, require manually authored specifications, or depend on executable models. They do not extract a compact hardware contract from an existing Linux driver as the input to constrained multi-backend translation.

REHARNES moves the deterministic boundary before generation. AST and LLVM-IR analysis determine the hardware-relevant operations and their provenance; flow-sensitive analysis determines ordering, predicates, and data dependencies; semantic inference supplies device roles and backend bindings. Only this framework-independent evidence is sent to the LLM. The model is instructed to choose how to express an established operation, not whether it exists. After generation, receipts—emission markers that generated code must carry per contract operation—enforce the required traceable register projection, while trace comparison checks expected MMIO order on exercised paths. This follows the broader translation-validation idea [13–15], but applies a narrower, evidence-bound check to generated drivers.

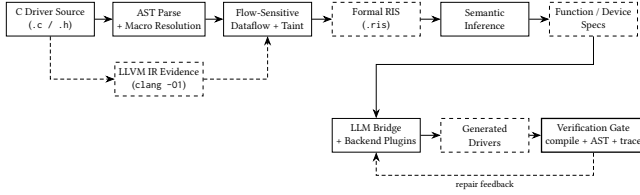


Figure 1. Architecture of REHARNES. Stage 1 performs hybrid AST+IR extraction into the structured RIS evidence IR. Stage 2 infers backend-independent function and device specifications. Stages 3–4 emit target drivers via pluggable backends driven by an LLM bridge, with a bounded verification gate providing structured repair feedback.

The resulting target contains the extracted device core and a backend-specific adapter rather than a translation of every source construct; its raw line count is comparable to the source’s (receipt and anchor markers account for the difference), but the semantic and textual search space the model navigates is the device core alone. This is a reduction in the model’s search space, not a deletion of source code and not a correctness argument by itself. Confidence in the modeled properties comes from the deterministic evidence and stated acceptance checks; the bounded surface makes the probabilistic step easier to constrain and audit.

3 System Design and Evidence Contract

REHARNES is structured as a four-stage pipeline that transforms C driver source into verification-gated, backend-specific driver code. Figure 1 shows the flow of artifacts through the system. The key design principle is the *evidence contract*: deterministic analysis establishes the required modeled behavior, and downstream stages are instructed to re-express rather than reinterpret it. The verification gate checks required traceable register operations and exercised traces; it does not claim to exclude every additional hardware access or establish whole-driver equivalence.

3.1 Architecture and Deterministic Boundary

Deterministic AST analysis resolves macros, callback bindings, control flow, and data dependencies; LLVM IR supplements MMIO hidden by header-inlined accessors (Section 4). The result is the RIS evidence IR plus backend-independent function/device summaries. Backend plugins serialize that contract for an LLM, which emits harness C, bare-metal C, Linux C, or Rust no_std. Compilation, receipt accounting for recognized register operations, and exercised-path trace checks then accept or reject the candidate within their stated scope and provide bounded repair feedback. Across 19 drivers, this pipeline extracts 485 evidenced operations over 157 registers; the multi-source evaluation covers 19 translation units and 27447 lines.

3.2 Register Interaction Sequence

The Register Interaction Sequence (RIS) is the central structured evidence intermediate representation of REHARNES. It provides a machine-parseable syntax for register, transaction, and functional-state observations, together with typed expressions and nested control-flow evidence. The current artifact does not define a complete denotational semantics or prove whole-program refinement; RIS defines the required evidence only for the operations and paths that the extractor recognizes and records. Every downstream stage consumes this bounded evidence contract.

Grammar and operation tiers. A RIS document consists of a driver header, one or more modules (one per analyzed function), and metadata blocks for accounting and validation. Each module is an ordered sequence of operations. The top-level grammar is:

```

driver <name> v<ver> {
  module <func> {
    <op>          -- one operation per
      source statement
    ...
  }
  ...
  accounting { source_accesses N; emitted N;
    ... }
  ir_analysis { source "f.c" { ir_generated
    true; ... } }
}

```

Operations are organized into three semantic tiers.

Tier 1: Register operations model direct MMIO interactions:

- R(<width>, <addr>) – Read: loads a value of the given width from the register address; the result is bound to a variable.
- W(<width>, <addr>) = <expr> – Write: stores a computed expression.
- RMW(<width>, <addr>) = <transform> – logical Read-Modify-Write: records a read, a transformation expression, and a write-back to the same address. It does not claim hardware-level atomicity.

The width annotation (B1, B2, B4, B8) records the access width in bytes, distinguishing a byte-wide status read from a 32-bit configuration write or a 64-bit access. This information is preserved through code generation so that the backend selects the intended primitive (readb vs. readl in Linux, or the corresponding register field width in Rust tock-registers).

Tier 2: Transaction operations model typed bus-level accesses that are not MMIO:

- Reads: TXREAD[<transport>] <target>@<selector> selects the transport (regmap, I2C/SMBus, or MFD) and the target register.

- TXWRITE and TXUPDATE — writes and masked updates preserving the selected transport’s semantics.

The transport field (regmap, i2c_smbus, i2c, or mfd) distinguishes the API family, and the target/selector pair keeps the bus handle separate from the register or command selector. This preserves a distinction that a flat MMIO representation would erase, such as the difference between a regmap handle and a memory address.

Tier 3: Functional-state operations capture data flow between software state and device registers:

- VALUE(<expr>) — ValueBind: binds a variable from a source-level expression (e.g., a buffer dereference).
- STATE(<field>) := <expr> — StateWrite: updates persistent driver state (cursor, counter, flag).
- OUT(<target>) := <expr> — OutputWrite: stores a value into a software output buffer.

These three tiers are interleaved in the extractor’s source-order projection within each module. The DELAY(<cycles>) and RETURN <expr> operations round out the set. Each operation carries an op_id (sequential identifier), a *reliability* tag (Exact or Conservative), an *intent* annotation (e.g., Init, Status, Config, DataTransfer), and source-location provenance (file and line). These annotations characterize recognized statements; they are not a complete audit of the original program.

Register address model. Register addresses in RIS are classified into three disjoint categories, forming the address domain $\mathcal{A}$:

$$\mathcal{A} = \underbrace{\text{SYMBOLIC}(d, r)}_{\substack{\text{device } d, \text{ register } r \\ \text{(macro-resolved)}}} \cup \underbrace{\text{FIXED}(b, o)}_{\substack{\text{base } b, \text{ numeric offset } o}} \cup \underbrace{\text{COMPUTED}(e)}_{\substack{\text{runtime expression } e}}$$

A *Symbolic* address is the ideal outcome: the extractor resolved a preprocessor macro to its register name and numeric offset, producing a stable, human-readable identifier such as `dws->regs.DW_SPI_DR`. A *Fixed* address has a numeric offset but no resolved name—for instance, a bare constant written directly at the call site. A *Computed* address carries a runtime expression, such as `base + (1 << (offset + 2))`, used for indexed register banks. The extractor never fabricates a symbolic name for an address it cannot statically resolve; it preserves the expression and marks it as a computed access, which downstream readiness analysis treats conservatively.

Expression algebra. Values use CONST, VAR, binary operators, bit slices, and conditional ITE terms; TOP explicitly represents an unresolved value. Constant folding canonicalizes known subexpressions. RMW extraction represents straight-line and branch-dependent mutations in the same algebra, using nested ITE terms when different guards transform a read value before it is written back.

Control flow. RIS uses IF/ELSE, LOOP, and SEQ. Guards and loop details use the same expression algebra. A predicate stack attaches accumulated if and switch-case conditions to leaf operations. This preserves path evidence for generation and analysis; the current receipt and runtime checks do not independently prove that a generated guard is equivalent to the source guard on every input.

Example. Listing 1 shows an extracted RIS fragment from the DesignWare APB SSI transmit path, illustrating all three operation tiers in a single loop body.

Listing 1. RIS fragment from `dw_spi_transfer_handler`: the SPI transmit loop, showing functional-state operations interleaved with register writes.

```
LOOP while dws->tx_len {
  IF dws->tx {
    IF (dws->n_bytes == 0x1) {
      txw := VALUE(*(u8 *) (dws->tx)) --
      ValueBind
    }
    STATE(dws->tx) := (dws->tx + dws->
      n_bytes) -- StateWrite: cursor
  }
  W(B4, dws->regs.DW_SPI_DR) = txw
  -- Write: push to FIFO
  STATE(dws->tx_len) := (dws->tx_len + -1)
  -- StateWrite: counter
}
```

The VALUE operation records that `txw` is derived from dereferencing the transmit buffer pointer; the two STATE operations advance the buffer cursor and decrement the remaining-length counter; and the W operation pushes the bound value to the data register. Without the functional-state operations, a generated driver could reproduce the register-write pattern yet fail to transfer data. The contract therefore requires the VALUE → STATE → W → STATE order. The general runtime oracle observes only MMIO events; dedicated DesignWare artifact checks inspect this functional-state pattern in the generated targets.

3.3 Device and Function Semantics

RIS specifies recognized ordered hardware-facing evidence; semantic inference adds roles needed to translate that evidence to a target environment. Each FunctionSpec records a backend-independent signature, callback role, execution context, state bindings, effects, pre/postconditions, and a reference to its RIS module. Callback-table evidence takes precedence over name heuristics: an `irq_chip.irq_ack` initializer, for example, establishes an interrupt-acknowledgment role even when the function name is ambiguous. C types are abstracted to concepts such as DeviceState, LogicalIRQ, and UInt.

A DeviceSpec composes these function contracts with the device class, state, resources, accessed register map, and invariants. MMIO base expressions become device-state bindings; observed callback roles introduce the corresponding IRQ, clock, GPIO, SPI, or bus resources. The result describes the extracted device core without prescribing Linux C, free-standing C, or Rust syntax.

3.4 Backend Bindings and Evidence JSON

A BindSpec maps abstract concepts to one backend: types, MMIO primitives, state expressions, callback slots, and exported entry points. Source facts retain supporting information that is useful for reconstruction but is not part of the portable contract, including structure fields, constants, callback initializers, and resource-acquisition evidence. At generation time, REHARNESS serializes the RIS operations, device identity/class, BindSpec, and selected source facts into one evidence JSON. FunctionSpec roles that cross the boundary are materialized as callback and state bindings rather than serialized as a separate object. This JSON is the only semantic input to the LLM; the original C source is not included.

4 Device-Core Contract Extraction

The extraction stage transforms complete Linux driver sources into the evidence contract defined above. A libclang-based AST path supplies macros, control structure, callback bindings, and flow-sensitive state; LLVM IR supplements operations hidden by header-inlined accessors.

4.1 AST Dataflow and Inter-Procedural Analysis

Translation units and macros. The pipeline constructs a libclang translation unit for each .c or .h input with detailed processing records, preserving macro definitions, expansions, and included-header context. A macro table maps register identifiers to integer offsets, allowing `base + GPIO_INT_EN` to become a symbolic register address rather than opaque text.

When a `compile_commands.json` database is available, the parser uses its include paths, definitions, and target arguments; otherwise it records diagnostics and uses the available kernel include configuration.

Target functions include lifecycle entry points, interrupt handlers, and callbacks registered through Linux operations tables. The table type and field are retained so semantic inference can distinguish roles such as interrupt acknowledgment and GPIO direction control.

Flow-sensitive dataflow and taint tracking. For each target function, the extractor performs a flow-sensitive intra-procedural dataflow analysis. It walks the function's statements in source order, maintaining an *abstract store* $\Sigma : \text{Var} \rightarrow$

$\mathcal{V}$ mapping program variables to abstract values. The abstract value domain $\mathcal{V}$ is designed specifically for register interaction analysis:

- $\text{BasePtr}(b)$ — a pointer originating from `ioremap` or an `__iomem` parameter; the MMIO base.
- $\text{Offset}(b, o, r)$ — $\text{BasePtr}(b)$ plus a constant offset o , optionally annotated with a resolved register name r .
- $\text{ReadTaint}(a, r)$ — a value loaded by an MMIO read from address a ; carries a taint label linking it back to the source register.
- $\text{Const}(n)$ — an integer literal or fully folded constant.
- $\text{SymExpr}(t)$ — a symbolic expression that cannot be fully evaluated (e.g., a runtime variable or unanalyzable call).
- Top — an opaque, unknown value.

The analysis seeds the store with known MMIO sources. When it encounters an `ioremap` or `devm_ioremap` call, the return value is bound to BasePtr in the store. Pointer-typed parameters (those with `__iomem` annotation or `void *` type) are also seeded as BasePtr candidates. As the walk proceeds, assignments update the store: `g = gpiochip_get_data(gc)` records that g derives from gc ; a subsequent `g->base` access is then resolved through the store to identify the MMIO base field.

Address resolution is the core operation. When the extractor encounters an MMIO call (e.g., `readl(g->base + GPIO_INT_STAT)`), it evaluates the address expression against the current store and macro table. The expression `g->base + GPIO_INT_STAT` is split at the top-level `+`, yielding `g->base` (resolved to BasePtr via the store) and `GPIO_INT_STAT` (resolved to Offset via the macro table, with `reg_name = "GPIO_INT_STAT"`). The combination produces an Offset with the resolved base and numeric offset, plus the symbolic register name. If no macro resolves, the numeric constant (or expression) is preserved as a `Fixed` or `Computed` address.

Branch conditions are tracked through a *predicate stack*. As the walker enters an `if` body, the condition expression is pushed; for the `else` path, the negation is pushed. Each leaf operation inherits the full stack as its guard. Switch-case branches are handled by conjoining the selector-equality predicate for each case. This means the extracted RIS preserves not just *what* register is accessed but *under what condition*—information that is essential for trace-level verification and for generating code that reproduces the same branching behavior.

Read-modify-write detection. RMW patterns are a critical register idiom: a value is read from a register, modified (typically by bitwise OR, AND, or XOR with a mask), and written back to the same address. REHARNESS detects these by matching the taint flow. When a `readl` stores its result into variable v at address a , the extractor records a ReadTaint on v linked to a . Subsequent mutations of v (`v |= BIT(n)`, `v &= mask`, etc.) are accumulated. When a `writel`

of v (or an expression derived from v) targets the same address a , the read-mutate-write sequence is collapsed into a single RMW operation.

The transformation expression is reconstructed by replaying the mutation sequence. For straight-line code, this is a simple composition: each compound assignment extends the expression tree. For branch-dependent mutations, the extractor builds an ITE nest: for each guard g_i under which v is mutated by function f_i , the transform becomes $\text{ITE}(g_i, f_i(v_{old}), \dots)$. Switch-case mutations are handled similarly, generating a disjunction of selector-equality guards. This reconstruction records the RMW transform represented by the extractor without dynamic execution. The current verification gate checks its receipt and primitive-shape obligations only within the stated scope; it does not independently re-prove an arbitrary generated value transform.

Wrapper inlining and inter-procedural analysis. Real drivers wrap MMIO primitives in helper functions. Without inter-procedural analysis, every operation inside a wrapper is invisible. REHARNES builds a call graph from the parsed AST and performs depth-limited, recursion-safe inlining of callee functions into their callers.

The call graph records, for each function, its callees with argument-to-parameter bindings and control-flow context (the predicate stack at the call site). When a callee is itself a target function with register operations, its extracted RIS operations are instantiated with the actual arguments substituted for formal parameters, and merged into the caller's operation sequence at the call-site position. For recognized inlined calls, this preserves the extractor's source-order projection: if probe calls `gpio_setbit` on line 42 and `readl` on line 43, the inlined operations from `gpio_setbit` appear before the line-43 read in the final RIS.

The inlining depth is bounded (default 3) to prevent unbounded expansion of deeply recursive call chains, and a visited set prevents cycles. The inliner also handles *wrapper summaries*: when a callee is a simple function containing exactly one MMIO call (a read or write) at the top level (no surrounding control flow), REHARNES infers a compact summary—a mapping from the wrapper's parameters to the underlying MMIO operation—and substitutes it at each call site without a full re-extraction. This is particularly effective for accessor pairs like `dw_readl/dw_writel`, where the wrapper is a one-line function forwarding to `readl/writel`. The summary inference is conservative: it requires explicit MMIO provenance (an `__iomem` parameter or conventional base-field name) and rejects generic `void *` addresses, reducing misclassification for the wrapper patterns it covers.

For multi-source drivers spanning multiple translation units, the call graph is extended with cross-TU edges resolved through symbol linkage. The multi-source manifest links bitcode via whole-program analysis, resolving 223 cross-translation-unit call edges in the evaluation corpus.

4.2 IR-Primary Evidence and the Tree-Preserving Join

The AST path handles macro offsets, wrappers, conditions, and arithmetic addresses, but two systematic gaps remain in a source-file-oriented libclang path: static inline MMIO accessors defined in kernel headers, and *address truth*. The AST models an access such as `readl(mmio + IO_ID)` through pattern-matched wrapper summaries; the address classification it produces (symbolic vs. fixed) is an inference, not a fact about the compiled artifact.

REHARNES therefore inverts the classical division of labor: the compiled artifact is the *primary* source of register-access truth, and the AST provides the intent layer on top. Each translation unit is compiled with the driver's real Kbuild flags (`clang -O1 -emit-llvm -g`); when a baseline driver is byte-identical to an in-tree source, its Kbuild `.cmd` context is borrowed so the analyzed IR is the artifact as built. At `-O1`, header accessors inline and MMIO primitives surface as inline-assembly templates:

```
; write: movl $0, $1
tail call void asm sideeffect "movl $0,$1",
    "r,*m,~{...}"(...)
; read:  movl $1, $0
%r = tail call i32 @asm sideeffect "movl $1,
    $0", "=r,*m,~{...}"(...)
```

Physical truth extraction. Every template match yields an operation with GEP-verified byte offset (the address chain is walked through `getelementptr` instructions; loop unrolling and peeling are deduplicated by a function/line/offset key), width (taken from the accessor family: `readb` yields B1 and `readq` yields B8), and provenance: the `!dbg` chain resolves through `inlinedAt` links to the driver source line, and register offsets are mapped back to driver-local macro names via a `clang -dM` reverse index filtered to macros defined in the driver's own sources.

Variable-name recovery. The `llvm.dbg.value` intrinsic, through its `!DILocalVariable` operand, binds SSA values to source variables. After inlining, one SSA temporary can carry *several* source variables, so name selection is scope-aware: the binding whose subprogram scope matches the frame the statement belongs to (innermost driver-file frame first) wins; genuinely ambiguous temporaries keep synthetic names rather than fabricating provenance.

Tree-preserving join. The AST formal is a tree (Cond/Seq/Loop wrapping Read/Write/RMW leaves that carry values, transforms, and guards). The join walks this tree and *upgrades* matched leaves in place: symbolic addresses become `Fixed{offset, name}` from the IR fact; guards, values, and RMW transforms are preserved; read/write pairs that the AST modeled as one read-modify-write are consolidated against the IR physical pair. Unmatched IR operations (physical accesses the AST missed) are appended as pure-IR

operations; unmatched AST operations (code the compiler eliminated, or library callbacks) are flagged supplementary. The join only ever *upgrades* an address to a GEP-verified constant; it never downgrades an AST-resolved address to the IR's generic runtime-offset encoding.

IR evidence is primary for addresses, offsets, widths, and physical completeness; the AST supplies macro names, predicates, callback bindings, functional-state operations, and values. Section 6 quantifies the division: the ablation shows named-fixed addresses come exclusively from the IR layer, while recall is preserved only by the AST supplement (single-TU IR misses library-mediated accesses), and a third-party CodeQL query agrees with the combined extraction on 206 of 209 line-identified sites, with all three divergences mutually confirmed as configuration-gated dead code.

4.3 Functional-State and Typed-Transaction Extraction

Functional state. Beyond register and transaction operations, REHARNESS extracts *functional-state* operations that represent how data moves between software buffers and device registers. They broaden the contract beyond register identity and order, but do not by themselves establish functional equivalence.

The extractor identifies three categories of functional-state operations during the dataflow walk.

ValueBind (VALUE). When a local variable is assigned from a source-level expression that feeds a subsequent register write argument, the binding is recorded. For example, `txw = *(u8 *) (dws->tx)` produces `txw := VALUE(*(u8 *) (dws->tx))`. The extractor retains only bindings that are consumed by a later operation (register write, state update, or output store); pure control-flow temporaries remain internal dataflow facts and are not emitted to the RIS module.

StateWrite (STATE). When a persistent driver-state field—a struct member accessed via `->` or `.`—is updated, the mutation is recorded. This includes pointer advancements (`dws->tx += n_bytes`), counter decrements (`dws->tx_len--`), flag assignments (`dws->dma_mapped = 0`), and callback registrations (`ctlr->set_cs = dw_spi_set_cs`). Local scalar temporaries that do not escape the function are not emitted. The distinction is important: a state write affects computation visible to subsequent callbacks or inlined helpers, while a local assignment is control-flow bookkeeping. Unary increment and decrement operations (`++/--`) on persistent members are also captured, reconstructed as additive assignments.

OutputWrite (OUT). When a value is stored through a pointer dereference into what the analysis identifies as a software output buffer, the store is recorded. For example, `*(u8 *) (dws->rx) = rxw` produces `OUT(*(u8 *) (dws->rx)) := rxw`. The extractor uses the assignment's extent end offset for ordering, ensuring that calls in the right-hand side (such as `*rx = readl(base)`) are emitted before the output write.

These three categories are extracted in source order and interleaved with register operations in the final RIS module. The ordering is critical: the SPI transmit loop's sequence—VALUE (read from tx buffer) → STATE (advance cursor) → W (write to data register) → STATE (decrement counter)—must be preserved, because reordering may write stale data or prevent termination. The evidence JSON retains this order for generation; the current general trace oracle checks the MMIO projection, while case-specific artifact checks cover the associated buffer/state operations.

Typed transactions. Many drivers interact with hardware through bus APIs rather than direct MMIO. Regmap provides a register-access abstraction layer; I2C/SMBus offers byte, word, and block transfers; and MFD (Multi-Function Device) helpers expose per-subdevice register accessors. These calls are semantically distinct from MMIO: a regmap read goes through a bus transaction, not a memory load, and conflating the regmap handle with a memory address would produce unsound specifications.

REHARNESS recognizes public regmap and I2C/SMBus read, write, update, and bulk helpers, preserving the handle as target and register/command as selector. MFD recognition is provenance-gated to declarations under `include/linux/mfd/` and narrow register-helper patterns, preventing arbitrary calls from being misclassified as device transactions.

The transaction operations preserve the bus-level semantics that flat MMIO representations lose: a `TXUPDATE[regmap]` with a mask and value is not equivalent to a read-modify-write on a memory address, because the regmap subsystem may apply caching, buffering, or bus-specific framing. By keeping these as distinct typed operations, RIS ensures that generated backends use the correct API family for each access.

5 Constrained LLM Translation and Verification

The extraction and semantic-inference stages produce RIS, function and device semantics, backend bindings, and selected source facts. This section defines the subset that crosses the LLM boundary, then describes backend plugins, acceptance checks, and bounded repair.

5.1 Evidence Boundary

All backends use one bridge that serializes six JSON sections: *driver* (identity and class), *registers* (name, offset, width), *modules* (ordered operations and nested control flow), *bind* (types, primitives, state expressions, callbacks, and includes), and optional *constants* and *structs* from selected source facts. Module entries retain `op_id`, address, value/transform, transaction transport, and functional-state operations. Function roles are represented by callback and state bindings; the full `FunctionSpec` object is not serialized.

The LLM never sees the original C source. The JSON is a generation-oriented projection; not every analysis fact crosses the boundary. The prompt authorizes target-language expression of required evidence but forbids inventing or omitting device operations. Subsequent checks detect missing or mutated traceable register operations and compare exercised MMIO order; they do not prove that arbitrary extra accesses are absent.

5.2 Backend Plugins and Prompted Translation

Each backend is a self-contained directory containing a Python module that constructs its BindSpec and a prompt.md with target rules. A registry discovers modules exposing NAME and generate(), so adding a target does not modify extraction or verification. **Harness C** uses fake MMIO and access logs; **bare-metal C** uses volatile primitives; **Linux C** emits platform or PCI lifecycles and kernel MMIO; and **Rust no_std** uses tock-registers, confining unsafe to base-address construction.

The bridge instantiates the selected prompt with the evidence JSON, calls the configured endpoint, and extracts candidate code. For example, the Linux prompt selects PCI or platform resource APIs and requests MMIO tracing, while the Rust prompt requires the corresponding tock-registers layout and bitfield macros. These rules constrain target adaptation but do not replace the evidence as the source of device operations.

The bridge is implemented against any OpenAI-compatible chat endpoint through a LangChain-based client; the model identifier, endpoint, and sampling parameters are project configuration and are not fixed by the framework. The bridge interface itself admits any endpoint that accepts a prompt and returns text. Swapping models does not change the stated acceptance criteria: different candidates face the same compile, receipt, and trace checks.

5.3 Compilation, Receipts, and Trace Oracles

LLM-generated code cannot be trusted. Models may hallucinate APIs, omit or reorder required operations, or introduce accesses absent from the contract. REHARNES therefore treats every candidate as untrusted and checks it against RIS. Passing means satisfying the checks described below; it does not mean that every unmodeled effect has been excluded. Figure 2 summarizes this boundary and its explicit non-claims.

Compilation. The first stage compiles the candidate with strict warnings for the target backend. Harness output is compiled with `cc -Wall -Werror`; bare-metal output with `cc -ffreestanding -Wall -Werror`; Linux output through the pinned kernel's Kbuild interface (`make M=...`); and Rust output with `rustc`. Compilation catches type mismatches,

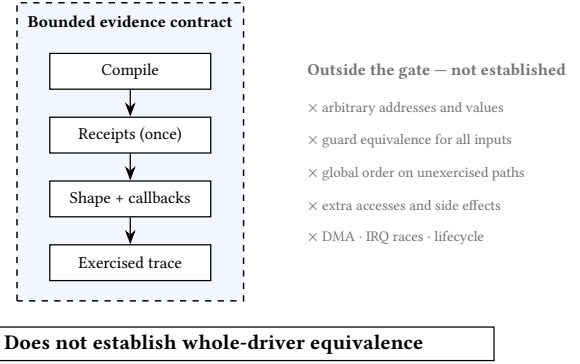


Figure 2. Scope of the verification gate. The left column lists checks implemented by the artifact; the right column records properties intentionally outside the gate. These are bounded evidence checks, not complete verification.

undefined symbols, missing includes, and syntactic errors—the most common LLM failure modes. A candidate that fails to compile is rejected before more expensive checks run.

AST lowering receipts. The second stage is a structural accounting check. Each recognized operation receives a unique `op_id`; generated C carries a lowering marker with that identifier, a canonical contract digest, and an emitted kind. The lowering oracle checks marker presence, cardinality, unknown identifiers, status, kind, and digest consistency with the frozen RIS contract. A separate libclang pass checks C labels and the primitive shape (kind, width, byte order, and write semantics) for covered leaf operations. The current AST oracle does not independently recover arbitrary address or value expressions, guard semantics, or cross-operation ordering from generated code; those are outside the proof scope and must not be described as digest re-computation from the candidate AST.

The receipt reconciliation enforces four properties:

- **Presence:** every RIS operation with a traceable address must have a corresponding receipt. Missing operations indicate that the LLM dropped evidence.
- **Exactly-once:** each `op_id` may appear in at most one receipt. Duplicate receipts indicate redundant or duplicated operations.
- **Kind matching:** a RIS Read must lower to a read primitive call, a Write to a write primitive call, and a ReadModifyWrite to either a read followed by a write at the same address or a single write whose value derives from a prior read of that address (validated through the lowering recipe).
- **Digest consistency:** the digest in the generated marker must match the canonical digest in the frozen contract. This catches marker-level drift, but is not by

itself an independent proof that the candidate's address, value expression, guard, or control-flow structure equals the source.

Operations whose addresses are untraceable (e.g., Computed addresses with non-lowerable terms) are excluded from receipt reconciliation and instead recorded as explicit readiness blockers, ensuring that the check is sound: it does not credit an operation that cannot be statically resolved to a register offset.

Trace oracle. The third stage compares the generated code's runtime register-access trace against an oracle derived from the structured RIS evidence. The trace oracle operates at two levels. For the harness backend, the generated program is executed and its [trace] log is parsed into an ordered sequence of (operation kind, offset) pairs. The oracle derives the expected sequence from the RIS modules' operations, resolving symbolic register names to offsets via the register map and expanding RMW operations into read-then-write pairs.

For Linux and bare-metal backends deployed in QEMU, the trace oracle consumes an instrumented kernel serial log. The instrumentation macros (injected by the Linux prompt template) emit [rhfn] *function* boundaries before each module function and [rh] R/W 0xO 0xV for each MMIO access. The oracle parses these into per-function segments and matches each segment against the expected RIS operation sequence using subsequence matching, which allows the runtime trace to contain additional accesses (e.g., framework-level reads) without failing the check, as long as all expected operations appear in order.

The trace oracle also handles branch sensitivity. The RIS records conditional operations with then/else branches, but the runtime trace reflects only the path actually taken. The oracle computes branch-sensitive sequence variants and accepts a trace matching one of them. Because the current runtime log does not carry a proof of the source predicate's value, this check confirms an exercised sequence variant rather than guard equivalence for all inputs.

Scope of acceptance. The QEMU matcher uses subsequences because framework code may perform accesses outside the extracted callback contract. It therefore confirms that expected MMIO events occur in order on an exercised path, but does not reject every additional access or prove that an unmodeled DMA/IRQ/MMIO side effect is absent. The general runtime trace also does not observe VALUE, STATE, or OUT; those operations are retained in evidence and checked only by dedicated artifact tests in the DesignWare case study. These limitations are part of the reported readiness boundary.

5.4 Bounded Repair

If any verification stage fails, REHARNES formats structured feedback and re-prompts the LLM. The feedback identifies the specific failure: a missing receipt for op_id *n*, a kind mismatch (expected Write, got Read), a compilation error at line *L*, or a trace mismatch (missing operation at offset 0xO). The LLM receives the current candidate and the failure report, and is instructed to produce a patched candidate. This repair loop iterates until the candidate passes all checks or the iteration budget (default 3) is exhausted, at which point the failure is recorded as a readiness blocker.

6 Evaluation

6.1 Experimental Setup and Research Questions

We evaluate REHARNES on 19 versioned Linux driver sources spanning GPIO controllers, clock/PLL, AHCI SATA, SDHCI MMC, virtio-MMIO, a framebuffer raster engine, and the QEMU edu PCI device. All results are produced by the machine-readable ./run.sh pipeline and exported to generated_results.tex; the tables in this section are populated by the macros and table macros defined therein, not manually transcribed.

The evaluation addresses five research questions:

- **RQ1 (Address resolution):** Among emitted addressable operations, what fractions are symbolic, fixed, or computed?
- **RQ2 (Layer contribution and external validity):** Which properties does each extraction layer uniquely contribute, and does an independent third-party tool (CodeQL) agree with the combined result?
- **RQ3 (Extracted structure):** How many RMW patterns and branch conditions does the extractor report?
- **RQ4 (Baseline translation):** Do the deterministically generated harness, bare-metal, and Linux outputs compile?
- **RQ5 (Strict readiness):** Beyond compilation, do the generated outputs satisfy the stated verification criteria (AST receipts, lowering reconciliation, and registration attestation)?
- **RQ6 (End-to-end validation):** Do generated drivers satisfy runtime oracles and, for the LLM case study, the reported case-specific artifact checks?

6.2 Contract Extraction Characteristics (RQ1 and RQ3)

Table 1 shows per-driver extraction metrics for a representative subset. Across all 19 drivers, REHARNES extracts 485 operations: 366 symbolic (77.7% of all addressable operations), 64 fixed, and 41 computed-address accesses. The pipeline detects 73 read-modify-write patterns and 123 branch conditions, referencing 157 distinct registers.

The symbolic rate of 77.7% shows that preprocessing records and flow-sensitive dataflow recover names for most emitted addressable operations. The remaining emitted accesses are

Table 1. Extraction results for representative drivers. Sym = symbolic addresses, Fixed = fixed offset, Comp = computed address, NAddr = non-address operations (e.g., DELAY, RETURN), RMW = read-modify-write, Cond = branch conditions, Regs = distinct registers. Sym+Fixed+Comp+NAddr equals Ops in every row; %Sym uses the addressable Sym+Fixed+Comp denominator. The subset spans the QEMU-validated drivers (ftgpio010, edu), the most condition-heavy driver (virtio_mmio), and the extremes of the symbolic-rate range; per-driver rows for all 19 drivers are in the versioned matrix artifact.

Driver	Ops	Sym	Fixed	Comp	NAddr	RMW	Cond	Regs	%Sym
gpio-ftgpio010	35	35	0	0	0	7	8	13	100.0%
virtio_mmio	59	46	12	1	0	0	44	31	78.0%
gpio-pl061	31	27	0	4	0	7	1	7	87.1%
gpio-cadence	32	32	0	0	0	4	8	12	100.0%
edu	5	3	2	0	0	0	2	3	60.0%
Total (19)	485	366	64	41	14	73	123	157	77.7%

classified as 64 direct numeric offsets or 41 runtime expressions for indexed register banks. The aggregate has 471 addressable and 14 non-address emitted operations. The zero unknown count (0) is an internal provenance count, not a precision or recall measurement against a manually labeled ground truth: an access missed before emission would not appear in it.

The gpio-ftgpio010 and gpio-cadence drivers achieve 100% symbolic rates because all their register offsets are defined through preprocessor macros that the MacroTable resolves. The edu driver has the lowest symbolic rate (60%) because two of its five accesses use fixed numeric offsets in the original source. virtio_mmio exercises the most complex extraction: 59 operations across 44 conditions, reflecting the virtio configuration-space accessors, whose width and offset are selected at runtime and therefore resist static name resolution.

6.3 Layer Ablation and Third-Party Cross-Validation (RQ2)

The IR-primary architecture (Section 4.2) separates two concerns: the compiled artifact supplies address truth, and the AST supplies intent. An ablation over the single-source corpus ($N=12$ compilable drivers) runs the extractor in three configurations and measures the effect of removing each layer (Table 2).

Three observations. First, *named-fixed addresses come exclusively from the IR layer*: the AST never emits a macro-named constant offset in this configuration (0.0 per driver), while both IR-bearing configurations do. Second, *recall is preserved only by the AST supplement*: single-TU IR alone reaches 0.450 because library-mediated accesses (GPIO generic callbacks, SDHCI accessors) never appear in the driver’s own translation unit. Third, the hybrid matches AST-only recall

Table 2. Layer ablation over 12 single-source drivers (IR-only runs on the 11 drivers that compile on the pinned x86 context; gpio-pl061 requires ARM headers and falls back in all configurations). Recall is line-identified source MMIO sites covered; named-fixed counts macro-named constant offsets per driver; quality is the readiness score consumed by the synthesis gate.

Configuration	Recall	Named-fixed/op	Quality	Time
AST-only	0.982	0.0 / 27.0	0.878	7.7 s
IR-only	0.450	4.3 / 12.3	0.795	0.3 s
Hybrid (default)	0.982	3.9 / 30.9	0.894	8.0 s

while improving quality (named addresses feed the resolution component) and completes in 8.0 s, the cached AST pass plus 0.3 s of IR analysis.

Cross-validation. An independent CodeQL query — built over databases with the same Kbuild contexts — matches function calls in the accessor family and agrees with the combined extraction on 206 of 209 line-identified sites across the 11 database-capable drivers. The three divergences are the same three lines in the ahci driver that both tools miss: a ThunderX errata handler gated by `#ifdef CONFIG_ARM64`, which the pinned x86 configuration compiles out. The two tools’ independent agreement converts these from unexplained misses into mutually confirmed dead code, and the remaining disagreement universe is empty after filtering header-inline accessor definitions out of the CodeQL result.

The same corpus also quantifies the two interleaved concerns of Section 2: classifying each driver’s non-blank lines by provenance, the aggregate composition is 9.5% device-core lines, 32.6% framework entry bodies (non-core lines inside callback and lifecycle functions), 25.7% glue wrappers and other function bodies, and 32.2% file-scope declarations and registration boilerplate (Figure 3). Only the first category crosses the cross-backend contract; the remaining three are re-bound per backend. The corpus is integration-dominated, which is precisely the composition the semantic-boundary design targets.

6.4 Translation and Strict Readiness (RQ4 and RQ5)

Table 3 reports readiness metrics for the representative subset (selection criteria as in Table 1). The counts in this subsection were produced by the rule-based emitters of the deterministic baseline; those emitters have since been retired from the tree in favor of LLM-only emission, so the numbers describe the frozen baseline recorded in the versioned matrix artifact rather than the current default path. Under that baseline, the harness backend compiles for 19/19 drivers, the bare-metal backend for 19/19, and the Linux backend for 18/19. All three backends compile the gpio-ftgpio010, gpio-pl061, gpio-cadence, virtio_mmio, and edu drivers. The

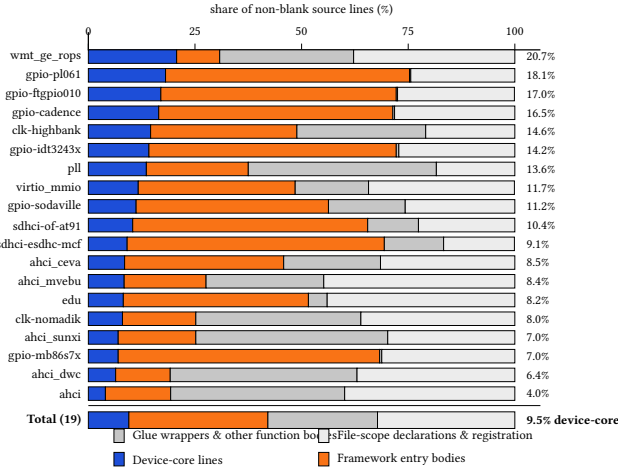


Figure 3. Composition of non-blank lines per driver, measured by source-line provenance of emitted operations. Device-core lines are referenced by ≥ 1 recorded operation; framework entry bodies are the non-core lines of callback and lifecycle functions; glue wrappers and helpers are remaining function bodies; file-scope lines are declarations, macros, and registration tables outside functions (blank lines excluded). The aggregate is 9.5% device-core versus 90.5% integration. Line-level attribution is an approximation: a line interleaving a guard and a register access counts as device-core.

Table 3. Readiness results. RIS = internal RIS quality heuristic (0–1), FuncSpec = function-spec quality, DevSpec = device-spec quality. H/B/L = harness / bare-metal / Linux compilation. Linux ready denotes strict artifact readiness; synthesis-eligible denotes sufficient context to attempt LLM synthesis. “–” means the check does not apply to that driver/backend (e.g., strict Linux readiness without a kernel-side lifecycle model); × means the check applied and failed; no “–” entry masks a failing check.

Driver	RIS	FuncSpec	DevSpec	H/B/L compile	Linux ready	Synth.-eligible
gpio-ftgpio010	1.000	1.000	1.000	✓/✓/✓	✓	✓
virtio_mmio	0.897	0.875	1.000	✓/✓/✓	×	×
gpio-pl061	0.924	1.000	0.938	✓/✓/✓	×	✓
gpio-cadence	1.000	1.000	1.000	✓/✓/✓	×	✓
edu	0.920	1.000	0.688	✓/✓/✓	×	✓

single Linux compilation failure is the sdhci-esdhc-mcf driver, whose SDHCI accessor contract lacks a passing source-contract oracle.

The mean RIS quality score across all drivers is 0.902. This is an internal completeness/readiness heuristic, not a calibrated probability or an accuracy estimate against source-level ground truth. The drivers that achieve 1.000 (gpio-ftgpio010, gpio-cadence) have all-symbolic addresses, no unsupported control-flow transfers, and callback bindings that pass the available internal attestation checks.

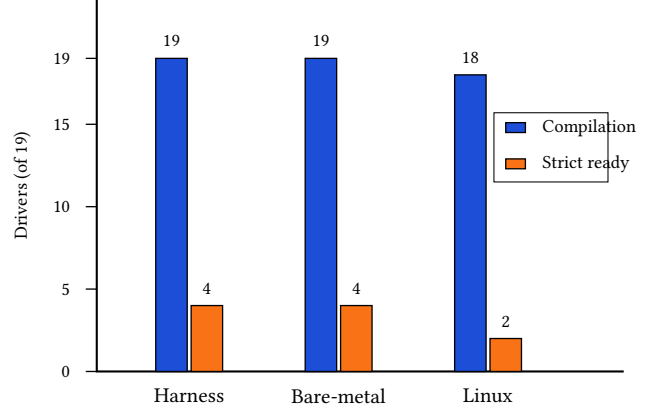


Figure 4. Compilation versus strict artifact readiness across the 19-driver evaluation. Blue bars count compilable deterministic outputs; orange bars count artifacts passing the modeled strict gate. Compilation is necessary but not sufficient, and neither result establishes whole-driver equivalence.

Strict artifact readiness. Compilation is necessary but not sufficient. REHARNES distinguishes *compilation* from *strict artifact readiness*: the latter requires that, for the recognized contract scope, every traceable register operation carries a lowering receipt with exactly-once enforcement, that the AST-receipt reconciliation succeeds with no missing or duplicate operations, that callback entries have verified table bindings, and that no readiness blockers (unsupported control-flow transfers, unsafe dynamic addresses, unproven loop summaries) remain.

Under strict artifact readiness, the harness and bare-metal backends achieve 4/19 and 4/19 respectively, and the Linux backend achieves 2/19. The passing drivers are named in the versioned matrix artifact: edu, gpio-ftgpio010, gpio-ids3243x, gpio-pl061 for harness and bare-metal, and gpio-ftgpio010, gpio-ids3243x for Linux. The gap between compilation (18–19/19) and strict readiness (2–4/19) is intentional: REHARNES treats unknown transforms, unsafe dynamic addresses, and unbound subsystem state as blockers rather than silently approximating them. A driver that compiles but has an unproven loop summary or a registration attestation failure is reported as not ready rather than ready with caveats, ensuring that downstream consumers do not mistake compilation for semantic correctness. Figure 4 makes this compilation/readiness separation explicit.

The 5/19 synthesis-eligible metric counts drivers whose structured context is sufficient for attempting assisted LLM synthesis: their evidence JSON passes the eligibility checks for bindings, unsupported operations, and source facts needed to attempt a candidate. This label does not imply that a candidate was generated or accepted. Classifying the 19 corpus’s 15 not-strict-ready drivers by the root cause recorded

Table 4. Multi-source results. TUs = translation units, LoC = source lines, Funcs = functions analyzed, X-TU = resolved cross-TU call edges, Prop = propagated MMIO edges, Src MMIO = source-level MMIO primitives, RIS MMIO = propagated RIS MMIO operations, H/B/L = backend compilation.

Driver module	TUs	LoC	Funcs	X-TU	Prop	Src MMIO	RIS MMIO	Ops	H/B/L	Orig. Kbuild
aspeed-vhub	5	3540	92	53	54	101	154	158	✓/✓/✓	✓ [†]
c67x00	4	2239	89	30	79	2	32	38	✓/✓/✓	✓ [†]
dwc2	10	21668	445	140	445	804	3608	4250	✓/✓/✓	✓ [†]

in their blocker lists (research/experiments/results/matrix.json): 11 involve missing or incomplete subsystem or lifecycle models (three exclusively—ahci_ceva, ahci_mvebu, pll), the human-effort-limited class; the rest fail on analysis limits—conservative loop summaries requiring validation (nine drivers, overlapping the subsystem class), one driver with 13 computed dynamic register addresses (gpio-mb86s7x), one with an unsupported control-flow transfer, and one failing the AST primitive proof under a synthesized lifecycle stub.

Zero-shot holdout. A frozen holdout of 12 drivers, excluded from all implementation work and enforced by an in-tree generalization guard, was run through the same deterministic pipeline: 12/12 compile on all three backends, strict readiness is 7/12 for harness and bare-metal and 5/12 for Linux, with 5 strict on every backend. The holdout’s strict-readiness rate exceeds the development corpus’s (4/19); Section 7.3 shows this is a corpus-composition effect—the development set’s eight AHCI and clock drivers are all blocked, and the holdout samples none of them—rather than a leakage signal. The holdout matrix and its versioned results are reported with the artifact (research/experiments/results/zero-shot-v2-matrix.json).

6.5 Multi-Source Scalability

To evaluate whether the pipeline scales beyond single-file drivers, we apply REHARNES to 3 real multi-source Linux USB modules totaling 19 translation units and 27447 lines of code (Table 4). The multi-source pipeline links per-TU bitcode, resolves cross-TU call edges through a single whole-program-analysis (WPA) pass, and propagates MMIO operations through inter-procedural call graphs to bounded depth.

In the three modules, the pipeline analyzes 626 functions and resolves 223 of the 223 cross-TU edges identified by its linker analysis; module-internal calls are partially resolved: 68 internal call sites remain unresolved (all in dwc2), for an overall call-edge resolution rate of 93.0%. MMIO propagation expands 907 source-level primitives into 3794 recorded RIS operations. This is evidence of wrapper propagation, not a recall measurement or proof of the full hardware footprint. Figure 5 shows the per-module distribution on a logarithmic scale. The dwc2 controller, with 445 functions and 726 call edges across 10 translation units, produces 4250 operations

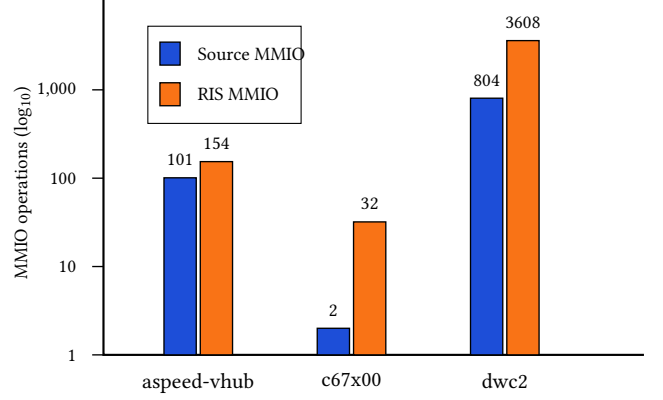


Figure 5. Source MMIO primitives and propagated RIS MMIO operations for the three multi-source modules (log scale). Counts show recorded evidence after propagation; they are not precision/recall measurements and do not establish a complete hardware-access footprint.

(the three modules total 4446) and is the largest driver in the evaluation; its extraction takes 176.452 seconds.

All three multi-source generated artifacts compile for all three backends (✓/✓/✓), and each module original Kbuild Makefile builds successfully against the pinned kernel tree (indicated by ✓[†] in the table). The latter is a build-integrity check on the original module and is not a semantic validation of the generated driver.

6.6 Runtime and End-to-End LLM Validation (RQ6)

Two QEMU experiments check concrete runtime behavior of deterministically generated drivers. Neither experiment invokes an LLM: both were produced by the rule-based emitters of the deterministic baseline at the frozen commit recorded in the versioned QEMU artifact, which pins the kernel-image SHA-256, per-experiment manifest digests, and driver source hashes. Because the emitters have since been retired from the tree, these numbers document the deterministic baseline rather than the current default generation path. The versioned QEMU artifact records 5 generated-driver experiments from this baseline. The two reported here, edu and gpio-ftgpio010, are the only ones validated by structured oracles (value checks and RIS-derived trace matching). The other 3 (e1000, e1000e, usb-storage) are probe-level runs whose manifests define no exercised-call oracle: the e1000 and usb-storage modules boot and pass their guest functional tests, with injected function-entry probes covering 36.8% and 11.1% of generated functions (the e1000 run additionally fails its unload step), while the e1000e module fails its guest exerciser. 2 further manifests (rtl8139, virtio-blk) are versioned but were not executed. The 2/2 structured-oracle pass rate thus has its denominator set by oracle availability, not by selective reporting.

Table 5. Index of the LLM-side evidence studies. Each study’s size, outcome, and versioned record; records live under `research/experiments/results/`.

Study	<i>n</i>	Outcome	Record
Closed-loop QEMU record	2	1 accepted (edu), ftgpi010 rejected	edu-ftgpi010-generation.json
Direct-translation baseline	1 cand.	gate reject at compile; budget-matched runs endpoint-blocked	direct-llm-baseline.json
Repeated pipeline trials	5+5+3	0 accepted at any stage	dw-repeated-trials.json
Existing-tool comparison	1 device	explicit, receipted protocol only in REHARNESS	existing-tool-comparison.json
DW artifact case study	4 backends	18/18 checklist; chain partially supervised	dw-apb-ssi-checklist.json
Gate mutation study	6 cand.	6/6 rejected (incl. pristine at strict plan)	dw-gate-mutation-study.json

The remainder of this subsection and the DesignWare case study that follows assemble the LLM-side evidence as six heterogeneous studies; Table 5 indexes them with their sizes, outcomes, and versioned records.

QEMU edu (PCI). The deterministic PCI backend generates a miscdevice providing positional reads and writes over the mapped BAR. The guest exerciser validates the device ID at offset 0x00, the complemented live-check value at 0x04, and the factorial result at 0x08. All value-level checks pass (EDU_TRACE_OK).

QEMU gpio-ftgpi010 (platform). The experiment registers a platform device, loads the instrumented deterministic module, and runs a GPIO chardev exerciser that triggers generic-chip direction, get-multiple, and set-multiple callbacks. Instrumentation emits exact runtime-function boundaries ([`rhfn`] events), and the oracle matches each selected call segment once against the structured RIS evidence operations, preventing one global trace from being credited to multiple callbacks. The oracle passes (TRACE_MATCH_OK) with 6/6 module coverage, 7/7 call coverage, 13/13 operation coverage, and 8/8 register coverage.

Together, the experiments validate two complementary properties on exercised protocol slices: concrete read/write values on the modeled PCI device, and access-order and offset preservation across a Linux platform-driver probe and its exercised subsystem callbacks.

Closed-loop LLM record. Beyond the deterministic baseline, the repository versions a closed-loop record for 2 source-build experiments in which the LLM bridge emits the candidate, the pinned Kbuild compiles it, and the same guest exerciser judges acceptance under bounded repair. 1 of 2 (edu) is accepted: the edu candidate passes the value-level oracle after 2 repair rounds and covers 6/6 of its generated functions at runtime, where the pinned in-tree baseline module covers 5/6. The gpio-ftgpi010 closed-loop candidate is rejected after 4 repair rounds—no candidate satisfied the runtime oracle within the bound, and the rejection is reported rather than retried under a different model. These are single-trial, single-endpoint records without repeated sampling; they complement, and do not replace, the deterministic-baseline QEMU numbers above.

Scoped direct-translation baseline. To isolate the effect of the evidence boundary on the same task, we also ran an unconstrained baseline: the raw pinned DesignWare sources (core and header, 1844 source lines in total for the

three files) were given to the same endpoint at temperature 0 with the model then in service (glm-5.2; the constrained pipeline’s recorded chain uses glm-5.3-highspeed) and a minimal “translate this driver to a host harness” prompt, and the candidate was passed through the identical verification gate and the same pattern items of the DesignWare checklist. The recorded baseline candidate passes all 14 presence-and-order pattern items yet is rejected by the gate at its first check (compile), because unconstrained emission compiles against neither the harness interface contract nor the receipt and anchor obligations. The pattern items alone are therefore necessary but not sufficient: they reward textual presence of the right register idioms, while acceptance additionally demands the per-operation receipt accounting and exercised-path trace that the constrained pipeline enforces. To remove the repair-budget confound, the baseline tool implements the same bounded compile-diagnostic repair loop as the pipeline (probe-compile, exact cc diagnostics fed back, region-bounded echo of the failing definitions, bounded rounds); the budget-matched measurement is endpoint-blocked—in the measurement window every attempt failed at the endpoint itself, with generation responses carrying no usable fenced body and repair calls stalling unanswered (all attempts are versioned in `research/experiments/results/direct-llm-baseline-endpoint-failures.json`)—so we report the blocked status rather than a number the endpoint never produced. The recorded pre-repair verdict is unchanged by budget in every completed observation, and the pipeline-side repeated trials below show bounded compile repair closing compilation for a constrained candidate in only 3/5 bare-metal trials and 0/5 harness trials; no completed run compiles the baseline’s unconstrained candidate under any budget. Like the closed-loop record, this is an endpoint-bound comparison, not a repeated-sample study.

Repeated trials of the constrained pipeline. To measure sample-to-sample variance rather than a single draw, the constrained DesignWare pipeline itself was rerun 5 times on the pinned extraction (same model, temperature 0, same endpoint; at temperature 0 the trials measure endpoint-level serving variance, not deliberate sampling diversity). Each trial measures the *same* candidate at three stages: raw first pass (compile repair disabled), post compile-repair (the pipeline’s default bounded budget), and post receipt-repair (the bounded repair_lowering protocol, up to six rounds, guarded by brace, comment, and re-compilation checks). Under these in-process bounded budgets, no trial reaches acceptance at any stage: the harness candidates fail compilation in 5/5 trials even after compile repair; the bare-metal candidates compile after repair in 3/5 trials but receipt accounting remains incomplete after six repair rounds (32–76 operations still missing; the compile guard rejects 8–10 style-violating or redefining emissions per trial); the Linux candidates fail compilation in all 3 measured trials (two further trials were lost to endpoint failures that return empty bodies on long

Table 6. Existing-tool comparison on the QEMU edu device. Lines are total/source-line counts of the versioned inputs; “binding” is what the realization depends on to run; the register protocol column is how register identity and order are expressed.

Realization	Lines	Binding	Register protocol
Linux driver (input)	227	kernel APIs	implicit
QEMU hand-written model	447	QEMU APIs	implicit (case dispatch)
C2Rust 0.22.1 (stub)	39	none	implicit (pointer arithmetic)
reharness Linux	207	adapter	RIS + receipts
reharness harness	147	none	RIS + receipts
reharness bare-metal	132	none	RIS + receipts
reharness Rust no_std	61	none	RIS + receipts

prompts and are recorded as such). The accepted flagship artifact of Section 6.6 therefore does *not* reproduce under the pipeline’s own bounded budgets alone: its recorded chain additionally used interactive compile repair, the lowering-repair rounds, dataflow repair, deterministic normalization, and a hand merge of duplicate lowering emissions, all logged in the versioned repair log. The bounded gate is thus a rejection instrument in practice—the honest reading is that bounded automated repair is insufficient for this driver family and the accepted artifact rests on the recorded human-supervised chain, whose effort is disclosed rather than amortized. Full per-trial check states are versioned in `research/experiments/results/dw-repeated-trials.json`.

Existing-tool comparison. Table 6 places the same device’s realizations side by side on the QEMU edu device, whose hand-written QEMU model is upstream ground truth. The three families expose the register protocol differently. QEMU’s model serves 11 MMIO offsets—the *device* view, including registers the driver never touches—while the pinned driver accesses 3 of them, and the reharness RIS covers exactly those 3/3 with per-operation receipts. C2Rust 0.22.1 cannot transpile the real driver at all: the kernel headers crash the transpiler in three stages (address-space conversion, tag-type recovery, then an error avalanche), so the comparison uses a de-kernelized stub that carries the same register protocol by hand; its 39 lines of transpiled Rust keep the protocol implicit in pointer arithmetic with 100% unsafe function signatures and no contract to reconcile against. The reharness artifacts are the only realizations whose register protocol is explicit, per-operation, and machine-checkable (receipt accounting against the extracted contract). All inputs and measurements are versioned in `research/experiments/existing-tools/` and `research/experiments/results/existing-tool-comparison.json`.

End-to-end LLM translation: DesignWare APB SSI. The Synopsys DesignWare APB SSI SPI controller exercises every component of REHARNES simultaneously: the hybrid

IR-enhanced extraction (its register accessors are static inline header functions invisible to the AST path alone), the functional-state operations (its transmit/receive paths move data between memory buffers and the data FIFO register), and the prompt-driven four-backend generation with LLM emission subject to the stated verification checks.

IR-enhanced extraction. Header-defined accessors and interrupt-mask helpers hide the underlying MMIO from a source-file-only AST pass. Merging IR evidence by function and offset yields 29 modules and 285 evidenced operations covering control, interrupt, and FIFO registers. The artifact’s own accounting block records 51 source accesses with 51 emitted, 0 unaccounted, and `strict_complete` set; its Z3 path validation reports 130 satisfiable, 0 infeasible, and 5 intentionally unreachable predicate paths; and the IR layer contributes 103 operations with 0 missing offsets at 100.0% per-source coverage, all machine-checked in the versioned `.ris` artifact and its formal JSON companion.

Functional-state preservation. The writer preserves the `VALUE`→`cursor` `STATE`→`FIFO` `W`→`length` `STATE` order shown in Listing 1; the reader preserves the symmetric register-to-buffer `OUT` path. Width-dependent buffer accesses remain distinct branches.

Four-backend generation. Three of the four backends—bare-metal C, the Linux kernel module, and Rust `no_std` with `tock-registers`—were generated from this single RIS specification by the same LLM bridge (model `glm-5.3-highspeed`, temperature 0, served on a private OpenAI-compatible endpoint; run metadata versioned in `research/experiments/results/llm-run-metadata.json`). The harness backend, whose contract differs from the bare-metal backend only in the host build environment and an oracle `main()` driver, was closed by a deterministic derivation from the repaired bare-metal pair (include `rename` plus an appended `main()`) after the endpoint stopped serving the long chunked generation; the derivation script guards receipt count and brace balance, and the run is recorded in the repair log like any other normalization pass. Raw emission is incomplete: across the regeneration chains the receipt-accounting oracle observed dropped operations on every backend, so the pipeline treats two bounded repair loops as mandatory—one fed by the missing/duplicate operation list with the authoritative RIS statements (batched to bound the response size), one by exact compiler diagnostics—before installation. In the recorded final chain only the bare-metal artifact still consumed LLM receipt-repair rounds; the Linux and Rust artifacts were completed by the deterministic normalization pre-passes and the dataflow loop alone, which is why their recorded receipt-repair counts below are zero. The receipt-repair loop is preceded by deterministic normalization pre-passes—anchor-name canonicalization to the generator’s doubled `__rh_op_op_<n>` labels and `__rh_txn_<n>` transaction anchors, digest rewriting from the contract, register-receipt-to-transaction-marker conversion, duplicate-receipt removal,

and merging of whole-function re-emissions into their base definitions—which repair metadata and structure only: register-access semantics remain checked by the anchor bodies, compilation, and the ordered data-flow items below. A third bounded loop, fed by the missing dataflow-evidence list together with an upstream-shaped reference fragment, completes the buffer-side transfer-loop dataflow (tx/rx cursor advance, length decrement, FIFO-to-buffer store) that receipts do not cover; where the model could not be reached, the same insertion runs deterministically from an upstream-shaped template under the same guards. Every repair response is checked against guards that reject receipt loss, brace imbalance, or an unclosed comment before it can touch the artifact. The harness required 0 receipt-repair and 0 compile-repair rounds, the bare-metal artifact 6 and 0, the Linux module 0 and 0, and the Rust artifact 0 and 0; post-repair receipt completeness and compilability per backend are recorded alongside every round in `research/experiments/results/artifact-repair-log.json`. The artifacts are audited by the versioned, machine-executable 18-item artifact checklist covering per-backend compilation, chip-select assertion in `set_cs`, interrupt mask/unmask sequences, transfer configuration, and the ordered tx/rx buffer data flow; 18 of 18 items pass, with per-item, per-backend evidence in `research/experiments/results/dw-apb-ssi-checklist.json`. This is an artifact-level case study rather than a held-out evaluation; the pipeline-level repeated-trial measurement (Section 6) quantifies how far the bounded in-process budgets alone reproduce it. The checklist is case-specific and does not establish whole-driver semantic equivalence; acceptance itself is the gate’s job, and the mutation study below replays that gate on the installed harness pair. The artifacts and checklist script are versioned under `examples/dw-apb-ssi/`.

Gate mutation study. The checklist audited what the artifacts contain; a complementary study asks whether the verification gate would *reject* the failure modes that motivated it. Starting from the repaired harness artifact (header and source replayed through the unchanged gate, so the artifact’s own acceptance status is measured rather than assumed), we inject five single-fault mutants—an invented write to an unmapped offset, removal of the interrupt status read, a 32-to-16-bit width shrink on a status read, an early advance of the receive cursor, and a forged variant that keeps a syntactically well-formed receipt and anchor label while deleting the hardware access inside it—and replay the unchanged gate on each mutant. The study replays six candidates in total: the five mutants plus the pristine artifact. All six are rejected (6 of 6 replay candidates; first failing check recorded per mutant): the invented write and the width shrink are rejected by the AST-leaf primitive-shape check (unanchored primitive, width mismatch), the dropped status read by receipt accounting, and the forged receipt by the primitive-shape check observing an empty anchor body against the expected shape—evidence that accounting binds receipts to

the primitive calls they annotate, not merely to their presence. The pristine artifact itself is reported as `rejected=true` under the same replay, so any undetected mutant is visible as the difference between these two counts rather than hidden behind a passing baseline; its rejection is not a register-semantics failure but the strict lowering plan’s conservative policy: 17 receipts annotate register ops carried by loops whose trip count the extractor marks unbounded, and the plan refuses to authorize receipts inside such loops (an exactly-once cardinality claim cannot be discharged there), while receipt accounting still demands a receipt for every contract op. The artifact keeps those accesses—they are required for the runnable transfer behavior—and passes compilation, receipt accounting, and the AST-leaf check. The early-cursor mutant shares this stage rather than failing an earlier one: buffer-cursor order is invisible to the op-level checks inside the gate, and the fault is instead exposed by the checklist’s ordered-dataflow items (store-before-advance), which sit outside the gate. Results are versioned in `research/experiments/results/dw-gate-mutation-study.json`. A prototype of the loop-aware receipt discharge sketched in Section 7.3 then measures these 17 entries on the pristine artifact with anchor-provenance runtime instrumentation: 12 discharge by an observed multiplicity of at least one with exact kind and register offset, and the 5 FIFO-loop receipts of `dw_spi_exec_mem_op` are never observed at all — the human-merged duplicate emission returns before the loops — so the runtime multiplicity check rejects dead receipts that the checklist level tolerates and localizes the defect to the merge (`research/experiments/results/dw-loop-aware-receipts.json`).

Two observations from this case study shaped the framework design. First, IR evidence is a supplement, not a replacement: in this case the IR pass recovers header-inlined MMIO, but macro names, controlling predicates, and call-back bindings exist only at the AST level. Second, register-level equivalence is insufficient for a data-moving driver. An earlier iteration that dropped the STATE/VALUE/OUT operations produced backends that touched the correct registers in the correct order yet could not transfer a byte, because buffer cursors never advanced. This experience directly motivated the functional-state layer in RIS.

7 Discussion and Limitations

7.1 Analysis and Subsystem Boundaries

REHARNESS models common GPIO, IRQ, platform, PCI, AMBA, virtio, clock, power-management, SPI, USB, file-operation, regmap, I2C/SMBus, and MFD paths. Network, DMA-engine, display, and regulator lifecycles still require models. Recursion, backward gotos, unbounded loops, and general abstract-store fixpoints remain readiness blockers; optional SVF is outside the default configuration.

Computed register-bank addresses are retained as run-time expressions and lowered when every term is bound. Expressions containing unknown calls, unbound members, or Top remain blockers rather than being assigned fabricated symbolic names. Across the evaluation, 41 of 485 operations use this computed-address representation.

7.2 What the Verification Gate Establishes

Compilation is separate from strict artifact readiness. Under the deterministic baseline, harness and bare-metal outputs compile for 19/19 drivers and Linux for 18/19; only 2/19 Linux outputs satisfy modeled readiness. Unknown transforms, unsafe addresses, unbound state, and incomplete lifecycles are blockers, not source-level equivalence claims.

LLM output may violate prompts or vary across models and samples. Compilation, receipt accounting, primitive-shape checks, and exercised traces constrain the reported scope only; they do not reject every extra side effect or prove guard equivalence and arbitrary hardware equivalence. The trusted base is the pinned toolchain, extractor, frozen JSON, receipt producer, and oracle; malicious devices, DMA corruption, interrupt races, and lifecycle failures are out of scope.

Functional-state operations cover selected cursors, counters, and output stores, but the general MMIO oracle does not observe them; only the DesignWare artifact checks inspect this data flow. Interrupt-spanning state machines, DMA lifecycles, concurrency, and physical SPI validation remain open.

The exactly-once receipt mechanism has one structural boundary, surfaced by the mutation study (Section 6.6): seventeen DesignWare receipts annotate register operations carried by loops whose trip count the extractor marks unbounded, so the strict lowering plan cannot authorize an exactly-once cardinality claim for them while receipt accounting still demands a receipt per contract operation. No artifact satisfies both constraints; the flagship artifact therefore passes compilation, receipt accounting, and the primitive-shape check, and is accepted through the case-specific 18-item checklist rather than the corpus-wide strict gate. A design path to remove the tension exists and has been prototyped on the flagship artifact (`qa/verification/loop_aware_receipts.py`; `record research/experiments/results/dw-loop-aware-receipts`). Its response is reported with the main evaluation (Section 6), and the composition analysis below explains the rate difference.

a deterministic instrumentation pass inserts anchor-provenance logging into every primitive of the accepted harness, the binary is built and run on the oracle input, and each logged (anchor, direction, register-offset) triple is matched against the contract operation that owns the anchor. 12 of the 17 loop-blocked receipts are discharged by an observed multiplicity of at least one with exact kind-and-offset shape; the remaining 5 are never observed because they are unreachable: the human-supervised merge of a duplicate repair emission in `dw_spi_exec_mem_op` returns before the module's FIFO loops, so their anchors execute zero times on every input. The prototype therefore does not admit the

artifact at a loop-aware strict gate — and that is what building it was for: the runtime multiplicity check detects dead receipts that compilation, receipt accounting, and primitive shape all tolerate, and localizes the defect to the merge that introduced them. Loop-aware receipts remain a prototype (harness backend only, one discharge rule: Top-count loops bounded by observed multiplicity ≥ 1); data-moving drivers stay outside the general strict gate until the design is integrated, and we report this as a measured limitation rather than routing them through it.

7.3 Scalability and Threats to Validity

Parsing kernel translation units dominates runtime (measured per-driver extraction takes 6.0–11.8 seconds, median 9.6, on the evaluation machine; the multi-source pipelines take 28.5–176.452 seconds each). The multi-source evaluation covers 19 units and 27447 lines; whole-kernel analysis would need persistent caches and parallel execution.

Internal validity depends on libclang, macro resolution, and IR merging; the (function, offset) key can collide for repeated same-address accesses. QEMU covers two deterministic protocol slices. The corpus lacks network drivers and physical-hardware validation. The closed-loop QEMU records and the Rust artifact remain single-trial, single-endpoint samples; the DW pipeline and its direct-LLM baseline now carry repeated trials and samples, but at temperature 0 on one (private) endpoint, so they measure serving variance rather than deliberate sampling diversity (model, temperature, and endpoint are recorded; Section 6.6). RIS quality, synthesis eligibility, and readiness are internal metrics, not precision/recall. Required follow-up evidence is listed in the experiment-debt ledger versioned with the artifact.

A frozen zero-shot holdout (12 drivers excluded from all implementation work, enforced by an in-tree generalization guard) is versioned with the artifact and currently reports 12/12 drivers compiling on all three deterministic backends, strict readiness of 7/12 (harness and bare-metal) and 5/12 (Linux), with 5 cases strict on all backends and 11 cases containing modeled hardware interactions; these counts are reported with the main evaluation (Section 6), and the composition analysis below explains the rate difference.

The holdout's higher strict-readiness rate than the development corpus (7/12 versus 4/19) is a composition effect rather than a leakage signal. Strict failures in both sets concentrate in drivers whose subsystem models are absent or incomplete: the development corpus contains five AHCI storage drivers and three clock drivers that are all blocked (0/8 strict), while the holdout samples no AHCI driver and its three clock and one virtio cases fail with the same call-context and effective-plan blockers (0/4). Within the GPIO and SD-HCI classes that both sets sample, the residual difference tracks driver complexity: the development corpus's failing

SDHCI cases are the far-difficulty ColdFire and AT91 variants, and its failing GPIO cases carry unsafe computed register addresses (*mb86s7x*) or inlined-helper definitions without proven call context (*sodaville*, *cadence*).

8 Conclusion

We presented REHARNESS, a constrained hybrid translator that extracts recognized device-core evidence from complete Linux drivers. AST-IR analysis recovers selected register, transaction, and state operations; an LLM emits four back-end forms, which are accepted only within the stated compile, receipt, shape, and exercised-trace checks.

Across 19 drivers and 3 multi-source modules, the results support an evidence-boundary prototype, not whole-driver equivalence; stronger claims remain contingent on the deferred experiments recorded with the artifact.

References

- [1] A. Chou, J. Yang, B. Chelf, S. Hallem, and D. Engler. An empirical study of operating system errors. In *Proc. 18th ACM Symp. on Operating Systems Principles (SOSP)*, 2001.
- [2] M. M. Swift, M. Annamalai, B. N. Bershad, and H. M. Levy. Recovering device drivers. *ACM Transactions on Computer Systems*, 24(4), 2006. doi:10.1145/1189256.1189257.
- [3] T. Ball, E. Bounimova, B. Cook, V. Levin, J. Lichtenberg, C. McGarvey, B. Ondrusek, S. K. Rajamani, and A. Ustuner. Thorough static analysis of device drivers. In *Proc. 1st ACM SIGOPS/EuroSys European Conf. on Computer Systems (EuroSys)*, 2006.
- [4] L. Ryzhyk, P. Chubb, I. Kuz, and G. Heiser. Dingo: Taming device drivers. In *Proc. 4th ACM European Conf. on Computer Systems (EuroSys)*, 2009.
- [5] L. Ryzhyk, P. Chubb, I. Kuz, E. Le Sueur, and G. Heiser. Automatic device driver synthesis with Termite. In *Proc. 22nd ACM Symp. on Operating Systems Principles (SOSP)*, 2009.
- [6] L. Ryzhyk, A. Walker, J. Keys, A. Legg, A. Raghunath, M. Stumm, and M. Vij. User-guided device driver synthesis with Termite. In *Proc. 11th USENIX Symp. on Operating Systems Design and Implementation (OSDI)*, 2014.
- [7] C. Cadar, D. Dunbar, and D. R. Engler. KLEE: Unassisted and automatic generation of high-coverage tests for complex systems programs. In *Proc. 8th USENIX Symp. on Operating Systems Design and Implementation (OSDI)*, 2008.
- [8] V. Chipounov, V. Kuznetsov, and G. Candea. S2E: A platform for in-vivo multi-path analysis of software systems. In *Proc. 16th Int'l Conf. on Architectural Support for Programming Languages and Operating Systems (ASPLOS)*, 2011.
- [9] M. Emre, R. Schroeder, K. Dewey, and B. Hardekopf. Translating C to safer Rust. In *Proc. ACM on Programming Languages*, 5(OOPSLA), 2021. doi:10.1145/3485498.
- [10] P. Jana, P. Jha, H. Ju, G. Kishore, A. Mahajan, and V. Ganesh. CoTran: An LLM-based code translator using reinforcement learning with feedback from compiler and symbolic execution. In *Proc. 27th European Conference on Artificial Intelligence (ECAI)*, 2024. doi:10.3233/FAIA240968.
- [11] Y. Yu, M. Zhu, and S. Chen. New approach for device driver development – Devil+ language. In *Int'l Conf. on Embedded Software and Systems (ICSS 2004), Revised Selected Papers*, LNCS. Springer, 2005, pp. 418–422. doi:10.1007/11535409_60.
- [12] C. Lattner and V. Adve. LLVM: A compilation framework for lifelong program analysis and transformation. In *Proc. Int'l Symp. on Code Generation and Optimization (CGO)*, 2004, pp. 75–86. doi:10.1109/CGO.2004.1281665.
- [13] G. Barthe, B. Gregoire, C. Kunz, and T. Rezk. Certificate translation for optimizing compilers. *ACM Transactions on Programming Languages and Systems*, 31(2), 2009, pp. 1–45. doi:10.1145/1538917.1538919.
- [14] J. Kang, Y. Kim, Y. Song, J. Lee, S. Park, M. D. Shin, Y. Kim, S. Cho, J. Choi, C.-K. Hur, and K. Yi. Crellvm: Verified credible compilation for LLVM. *ACM SIGPLAN Notices*, 53(4), 2018, pp. 631–645. doi:10.1145/3296979.3192377.
- [15] N. P. Lopes, J. Lee, C.-K. Hur, Z. Liu, and J. Regehr. Alive2: Bounded translation validation for LLVM. In *Proc. 42nd ACM SIGPLAN Int'l Conf. on Programming Language Design and Implementation (PLDI)*, 2021, pp. 65–79. doi:10.1145/3453483.3454030.
- [16] M.-A. Lachaux, B. Roziere, L. Chanasot, and G. Lample. Unsupervised translation of programming languages. arXiv:2006.03511, 2020.
- [17] C. Yang, Z. Zhao, and L. Zhang. KernelGPT: Enhanced kernel fuzzing via large language models. In *Proc. 30th ACM Int'l Conf. on Architectural Support for Programming Languages and Operating Systems (ASPLOS)*, 2025. doi:10.1145/3676641.3716022.
- [18] A. Kharlamova et al. LLM-driven kernel evolution: Automating driver updates. arXiv:2511.18924, 2025.
- [19] Y. Padioleau, J. Lawall, R. R. Hansen, and G. Muller. Semantic patches: helping Linux evolution. In *Testing: Academic and Industrial Conference, Practice and Research Techniques (TAICPART)*, 2007. doi:10.1109/TAICPART.2007.23.
- [20] J. Lawall and G. Muller. Coccinelle: 10 years of automated evolution in the Linux kernel. In *2018 USENIX Annual Technical Conference (USENIX ATC)*, pages 601–614, 2018.
- [21] I. Zakharov, M. Mandrykin, V. Mutilin, E. Novikov, A. Petrenko, A. Khoroshilov, and P. Shved. Configurable toolset for static verification of operating systems kernel modules. *Programming and Computer Software*, 41(1), 2015. doi:10.1134/S0361768815010065.
- [22] Y. Wang, W. Wang, S. Joty, and S. C. H. Hoi. CodeT5: Identifier-aware unified pre-trained encoder-decoder models for code understanding and generation. In *EMNLP*, 2021, pp. 8696–8708. doi:10.18653/v1/2021.emnlp-main.685.