


CURRENT-LIMITED 3.3 V BENCH SUPPLY / CAMERA RAIL

Fit a shunt at J3 for operation, or a fused ammeter in series. Pin 1 = square pad.

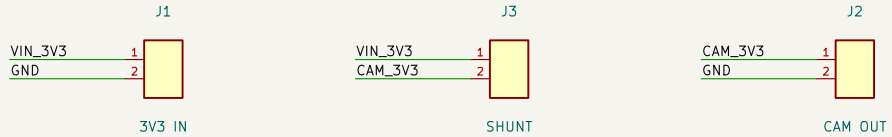

Rail-powered indicator and output bypass





J2 powers a separately qualified 3.3 V module. Bare sensors require multiple rails.

Bench only | regulated 3.3 V input | no camera approval

Sheet: /
File: cam-rail-a.kicad_sch

Title: CAM-RAIL-A | Camera module rail interposer

Size: A4	Date:	**Rev: A**
KiCad E.D.A. 10.0.7		Id: 1/1