


At the registered noise level the seed moves the output as much as the architecture; at 20 dB it no longer does

← same architecture, different seed →

← same architecture, different seed →

different architecture

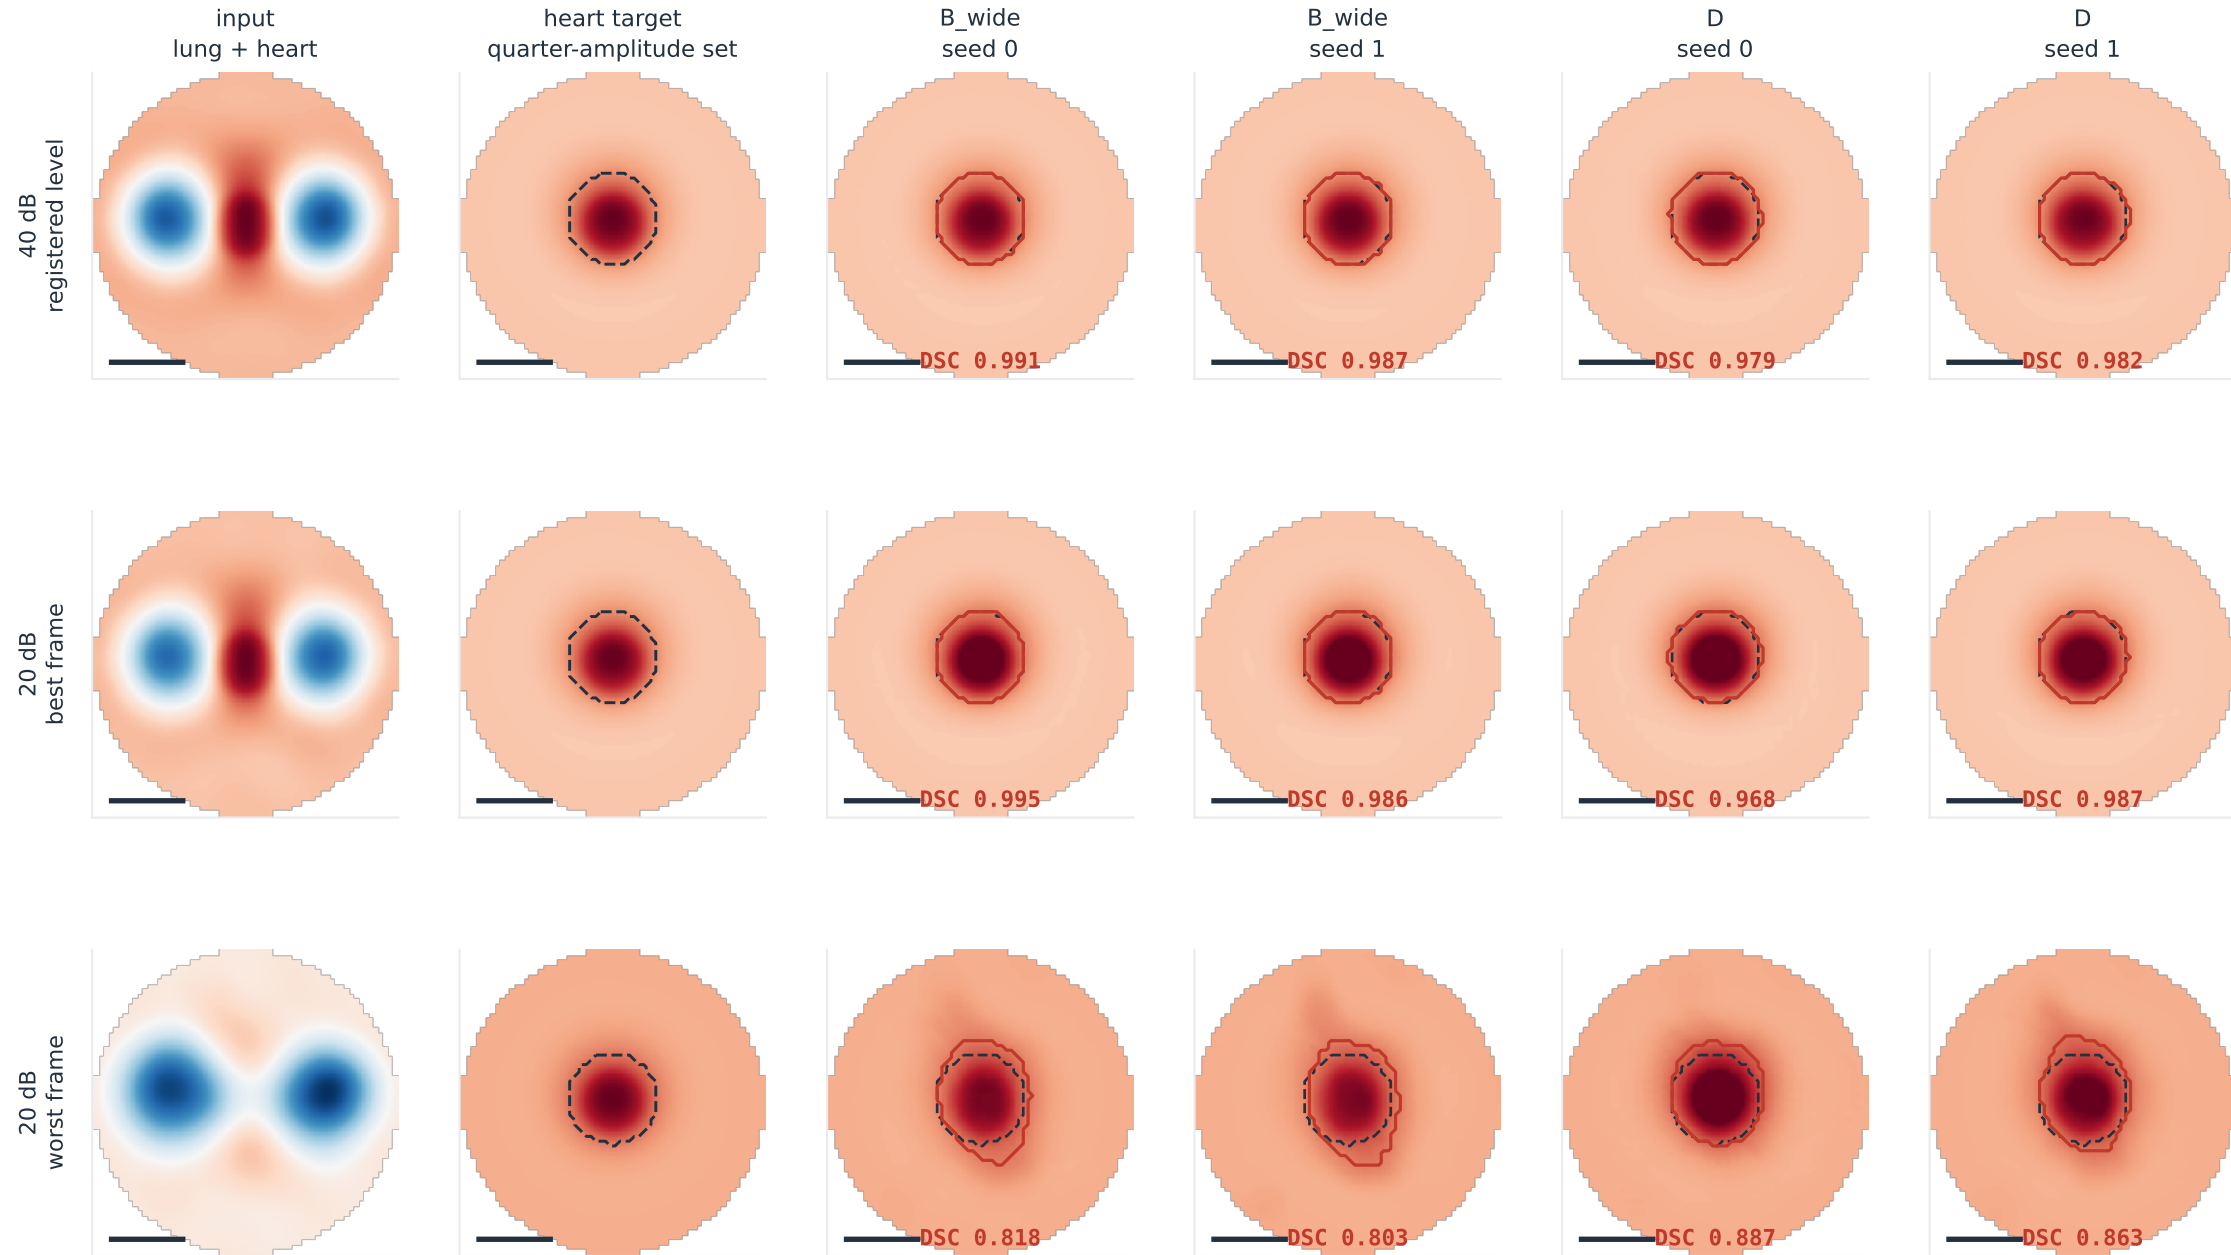

Heart channel. Dashed = the quarter-amplitude set of the heart's own reconstruction (the registered target); solid red = the model's own quarter-amplitude set, taken in image units. Bars are 1 model unit. Frames are chosen by rule, not by eye: the best and the worst of the 6 dumped test frames at 20 dB (0.843-0.984), which brackets the range rather than implying a typical frame. Over the registered 58 seeds, D – B_wide is +0.223 DSC points at 40 dB (95% CI [+0.020, +0.441]) against a within-arm seed SD of 0.43-0.67, and +2.097 points at 20 dB (CI [+1.642, +2.543]) against 1.08.