


CVN-69 Hull-Flight-Deck Integration Drawings


MILESTONE 2 · 1:700 · 476.00 MM OVERALL · GLUE-ONLY · UNRELEASED REVIEW

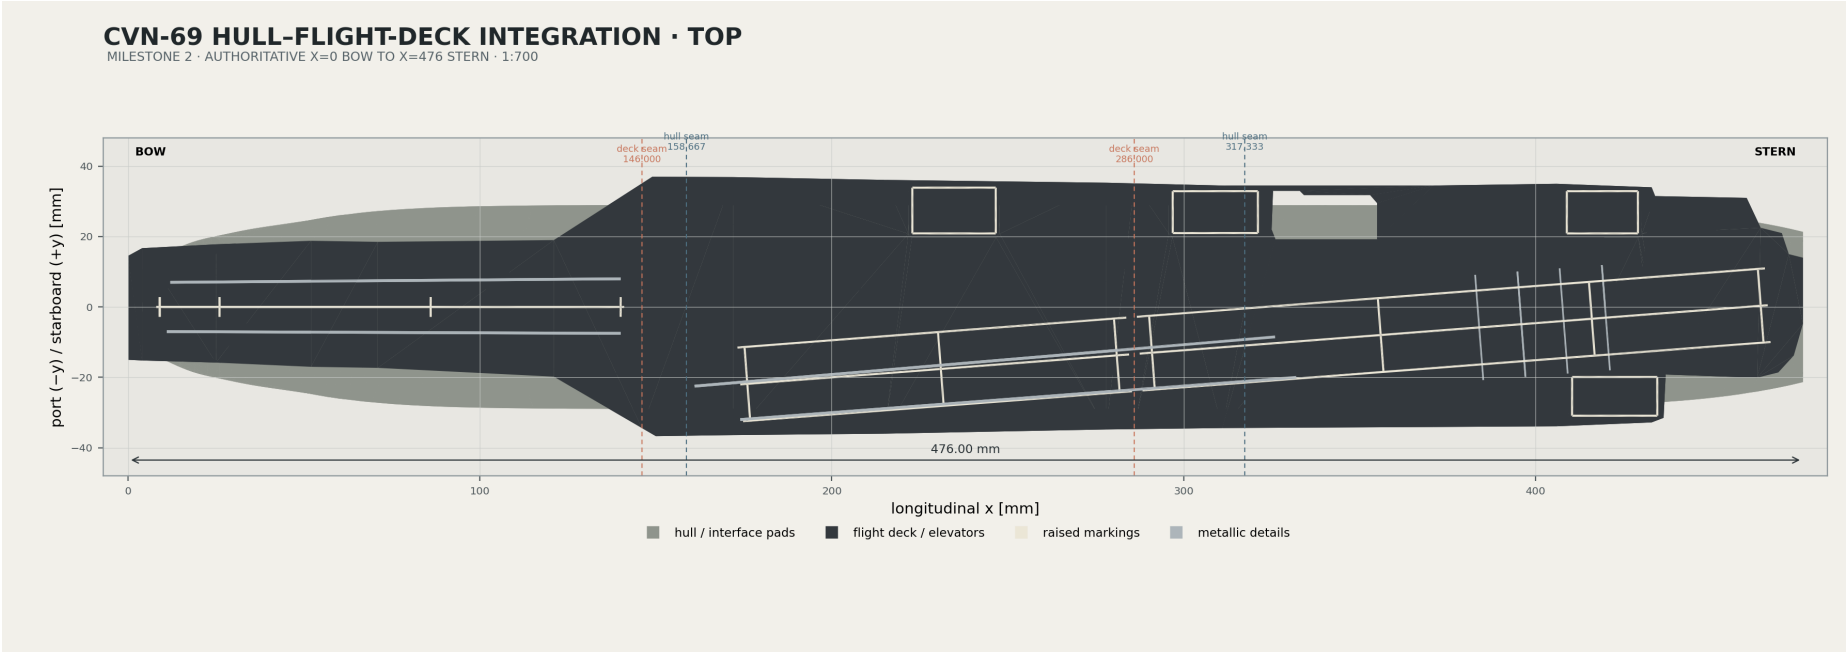

Datum	Authoritative definition	Measured/nominal
X	Bow to stern	0.00 to 476.00 mm
Y	Port negative to starboard positive	centerline y = 0.00 mm
Z	Vertical from hull keel datum	deck underside z = 31.50 mm
Deck transform	Mirror approved deck about x = 238 mm	x' = 476 - x; y unchanged

Module seam and interface station plan



Deck and hull seams remain intentionally staggered. Landing pads are paired at $y = \pm 8$ mm and avoid all seams, elevators, and the island opening.

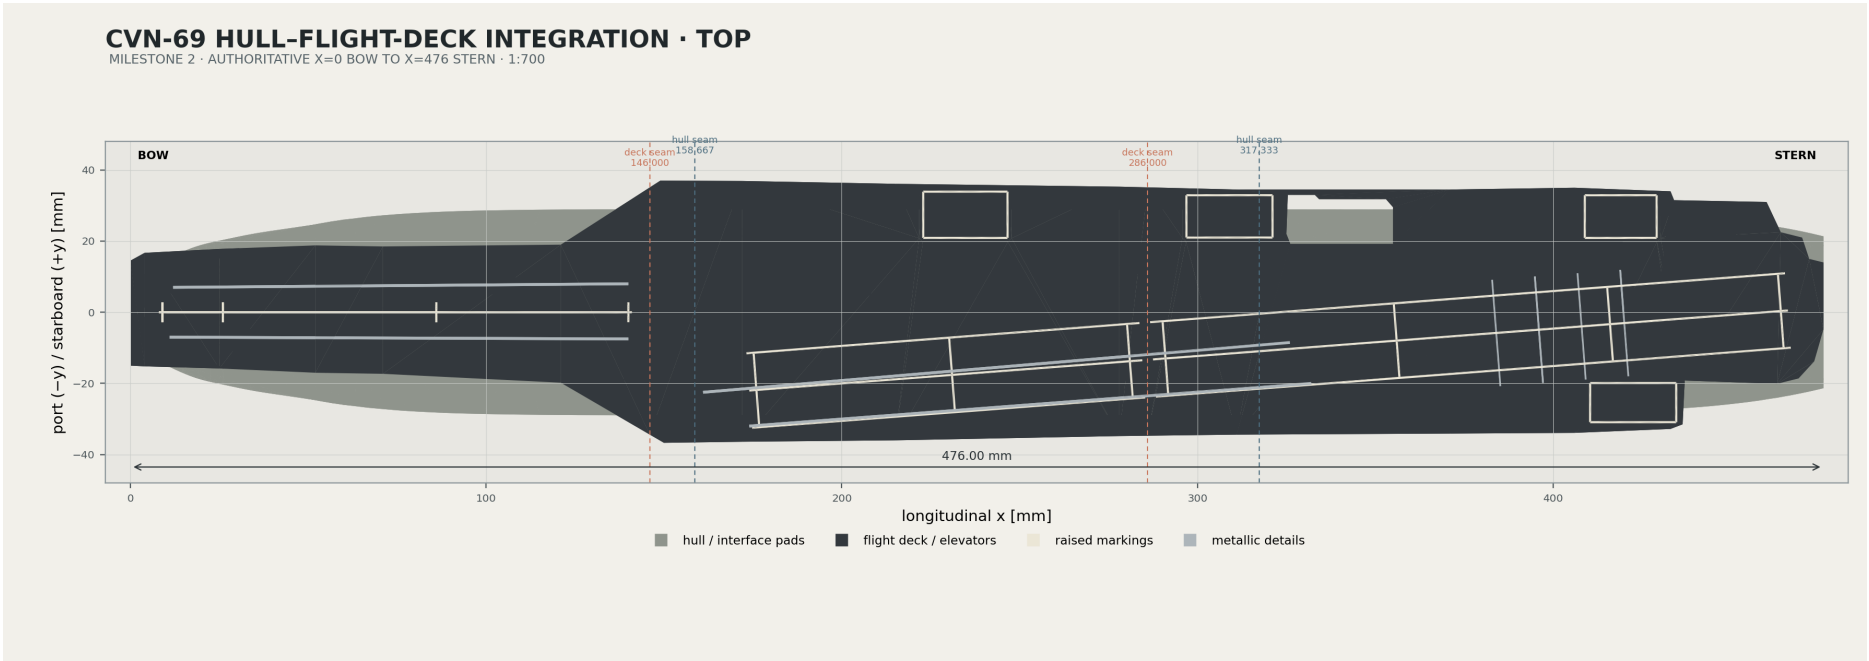

Feature	X positions (mm)	Engineering purpose
Hull seams	158.667, 317.333	Approved concealed hull keys
Deck seams	146.000, 286.000	Staggered; supported over single hull modules
Landing-pad stations	32, 105, 205, 270, 370, 445	Paired port/starboard self-alignment

Interface sections

The keyed pad supplies repeatable lateral/longitudinal registration. The remaining overlapping hull-top area supplies continuous support and hidden glue surface.

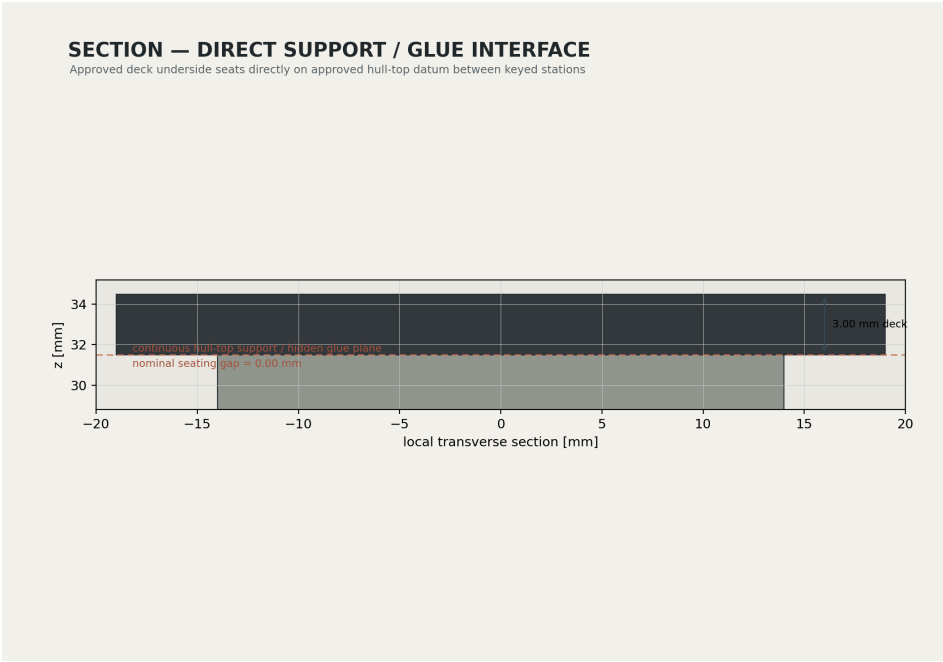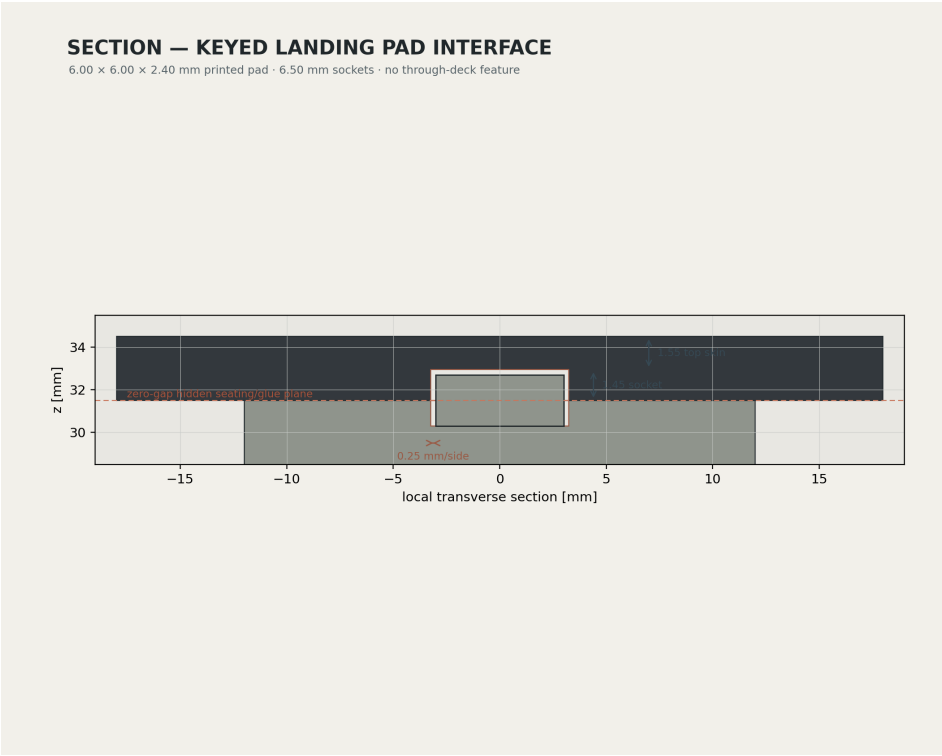


Parameter	Value	Requirement
Pad	6.00 × 6.00 × 2.40 mm	Printed Ash Gray PLA
Socket	6.50 × 6.50 mm	0.25 mm clearance per side
Hull insertion	1.20 mm	Meets minimum structural feature
Deck socket	1.45 mm deep	Leaves 1.55 mm top skin
Seating gap	0.00 mm nominal	≤ 0.30 mm

Assembly and exploded reference

All sockets and pads are concealed after assembly. No magnets, screws, metal pins, heat-set inserts, or purchased connectors are used.

CVN-69 MILESTONE 2 • EXPLODED HULL/DECK ASSEMBLY

HULL • TWELVE KEYED LANDING PADS • DECK MODULES • REMOVABLE DETAILS

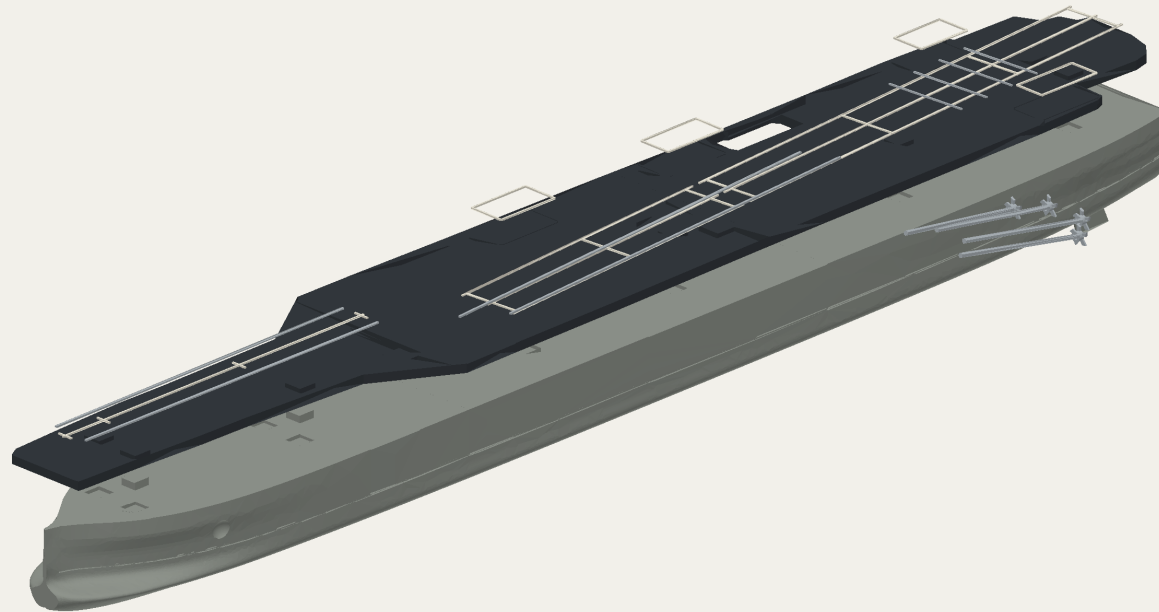

■ hull / interface pads ■ flight deck / elevators ■ raised markings ■ metallic details