


CVN-69 Weapon Mount Interface Coupon

PRINT / FIT / GLUE TEST · RUN BEFORE PRODUCTION FOUNDATIONS

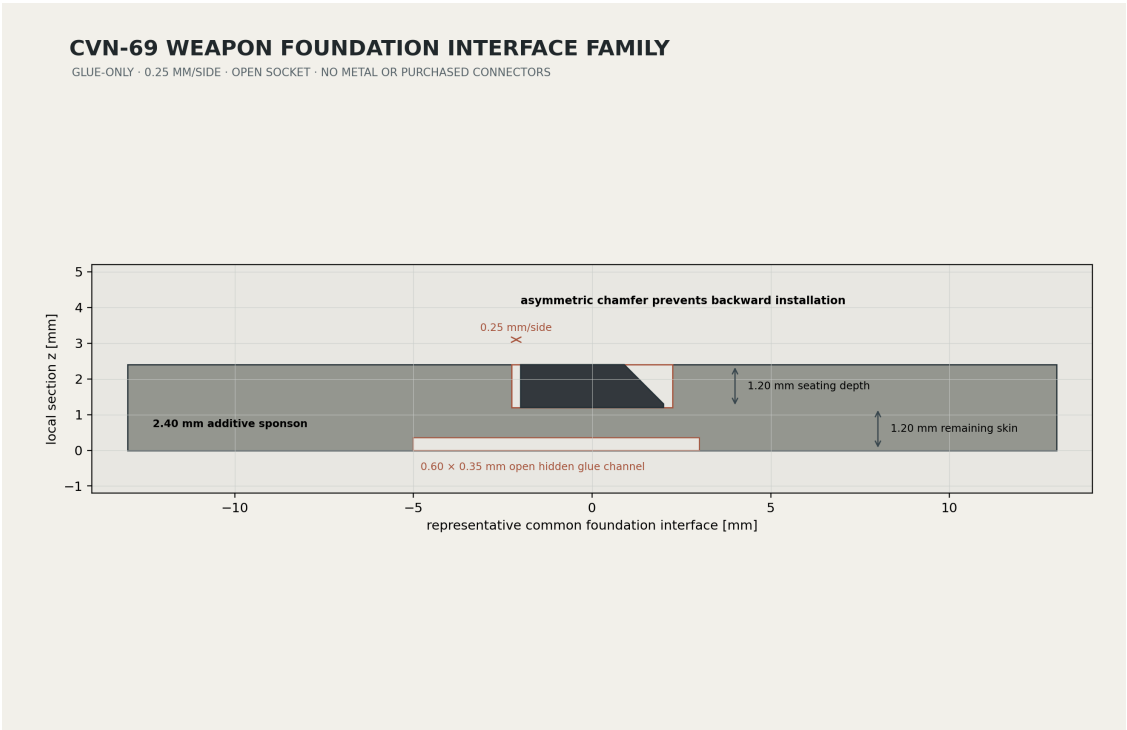

Feature	Actual production value
Male feature	4.00 × 5.00 mm asymmetric chamfered key
Female clearance	0.25 mm per side
Seating depth	1.20 mm
Remaining skin	1.20 mm
Glue channel	0.60 mm wide × 0.35 mm deep; open
Coupon envelope	48 × 24 × 4.20 mm per piece; under 60 × 60 × 25 mm

Procedure

- Print both named objects at 100% with the exact planned production process.
- Remove brim without filing the nominal mating walls. Dry-fit by hand; do not force or reverse.
- Pass when broad faces seat completely, the fit does not rock, and no wall cracks or whitens.
- Apply a small amount of medium CA through the open channel, seat fully, cure, and record the result.
- If it fails, correct printer calibration or slicer compensation and repeat. Never scale production files.

Acceptance record

Item	Record
Printer / nozzle	_____
PLA / layer height	_____
XY / elephant-foot compensation	_____
Dry seating result	PASS / FAIL measured error: _____ mm
Lean / rocking	PASS / FAIL observed: _____
CA glue result	PASS / FAIL cure time: _____
Operator / date	_____

Automated geometry and slicer validation does not replace this physical first-article coupon.