


Air-Wing First-Article Instructions

Plate: Print_Plate_00_First_Article.3mf · packed envelope ≤120 × 120 mm

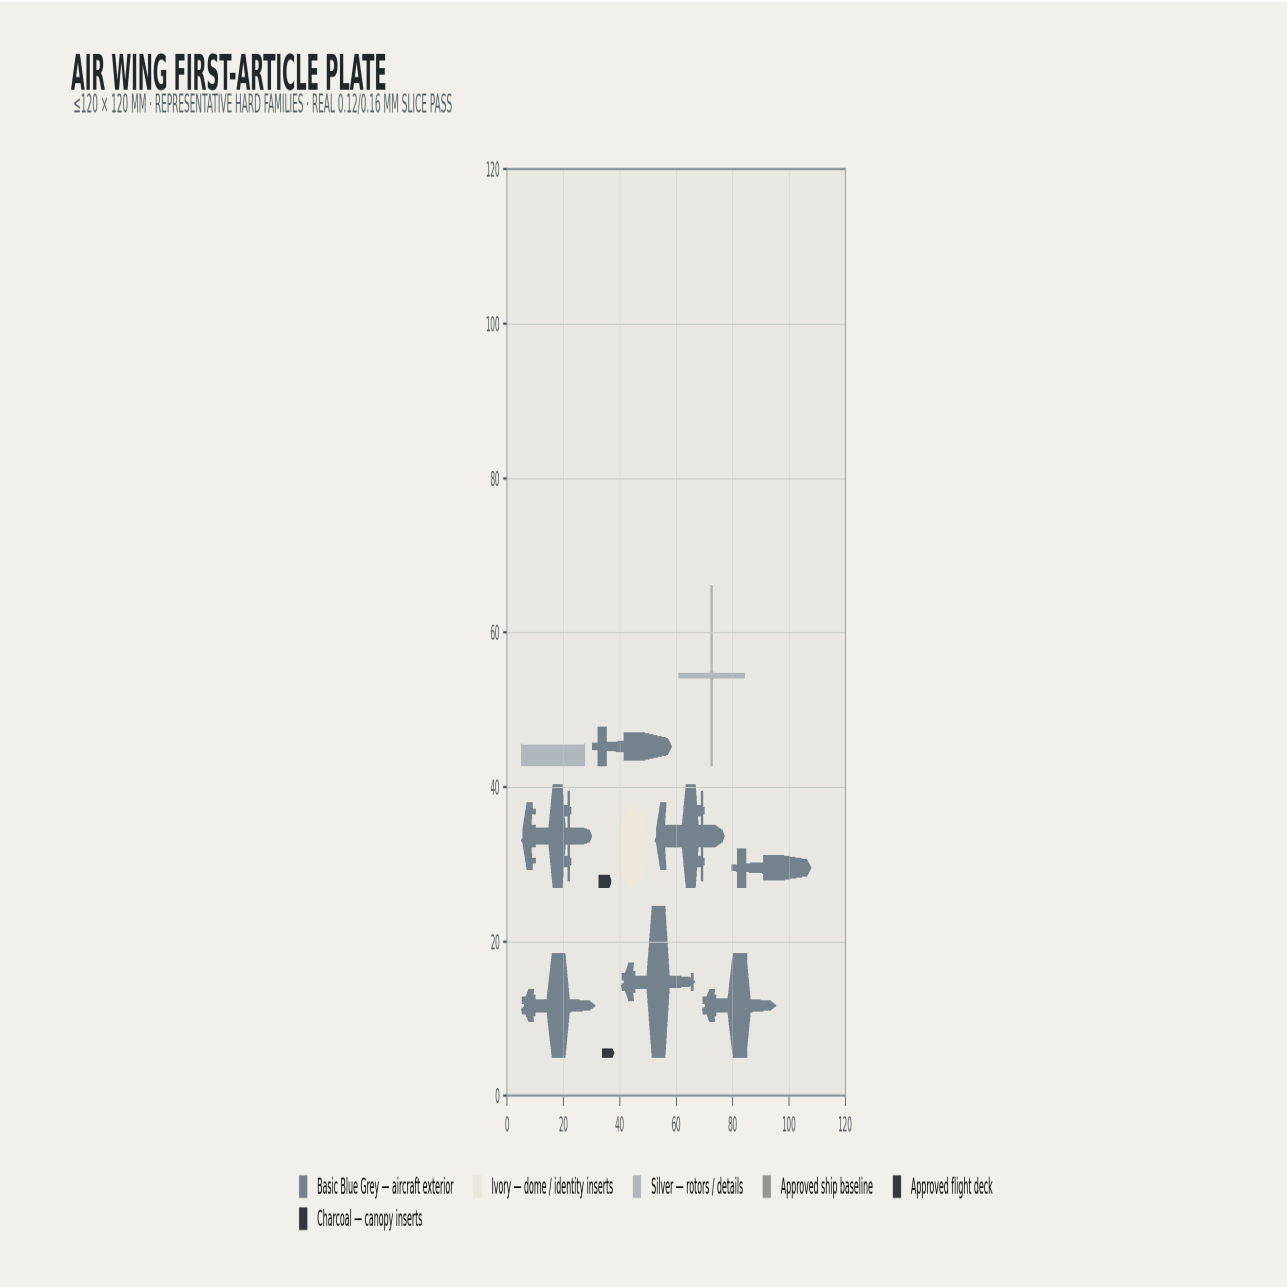

Print

- Print at 100% with a 0.40 mm nozzle, 0.12 mm preferred layer, three walls, zero XY compensation unless your calibrated process requires otherwise.
- Assign materials by object name; a single-material geometry test is acceptable before color production.

Inspect and record

Check	Acceptance
Spread/folded/launch bodies	all wings, fins, nacelles and gear/support features complete
Hawkeye/COD	propeller crosses complete; rotodome flat and round

Check	Acceptance
MH-60	all deployed/folded rotor blades present
Support removal	rails detach without tearing the 0.70 mm flight surfaces
Glue fit	canopies/dome/rotors seat by hand; no scaling

Gate

This PDF defines the physical review procedure; the repository records only automated geometry/slicer PASS until a dated physical result is supplied.