


CVN-69 Milestone 5 — Layout Guide

Coordinate system

x = 0 bow to x = 476 stern; y is port negative and starboard positive; z uses the approved keel datum with the deck top at z = 34.50 mm; heading is clockwise from +x.

Provided layouts

JSON	Count	Purpose
light_deck_layout.json	16	open-deck visual review
default_deployment_layout.json	32	integrated review and principal renders
full_deck_layout.json	36	dense folded-wing display at the valid lower target bound

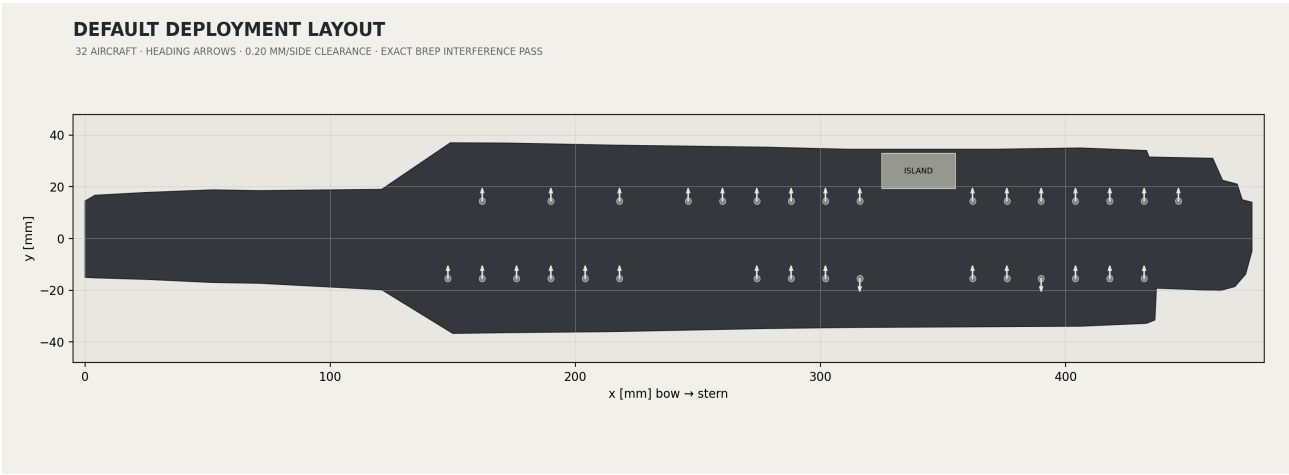

Editing rules

- Keep every required field: type, variant, squadron, x/y/z, heading, material, source, confidence.
- Maintain at least 0.20 mm clearance per aircraft side (0.40 mm object-to-object AABB clearance in the supplied layouts).
- Re-run the layout builder and validator after any coordinate change; the exact 0.10 mm³ common-volume gate includes deck boundary, island, weapons, elevators, catapults, arresting wires, markings, and neighboring aircraft.
- The integrated 3MF/STEP are non-production geometry reviews; print aircraft from the type plates or individual STLs.