


CVN-69 Milestone 6 — Deck Equipment Layout Guide

Coordinate system

x = 0 bow to x = 476 stern; y port negative / starboard positive; z uses the approved hull datum with deck top at 34.50 mm; heading is clockwise from +x.

JSON	Support count	Coordinated AirWing
light_support_layout.json	14	light_deck_layout.json (16 aircraft)
default_support_layout.json	24	default_deployment_layout.json (32 aircraft)
full_support_layout.json	32	full_deck_layout.json (36 aircraft)

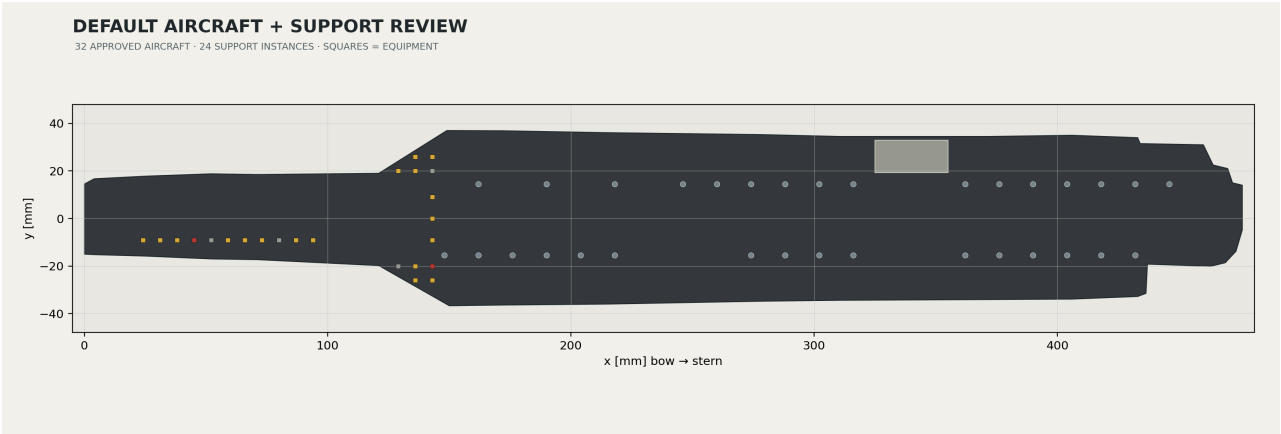

Required entry fields

equipment family, variant, instance ID, x/y/z, heading, material, intended aircraft relationship, confidence/display rationale, state, source, and intentional linkage metadata.

Editing rules

- Re-run the layout builder and validator after any change. The 0.10 mm³ gate covers deck boundary, island, defensive systems, elevators, catapults, wires, markings, seams, aircraft, and neighboring support equipment.
- A towing or servicing state requires explicit aircraft linkage metadata. The released layouts declare only independent parked/staged/stored/firefighting objects.
- Integrated STEP/3MF files are review assemblies, not print plates. Print from family plates or individual STLs.