


# Deck Vehicles First-Article Instructions

Plate: Print\_Plate\_00\_First\_Article.3mf · envelope ≤120 × 120 mm

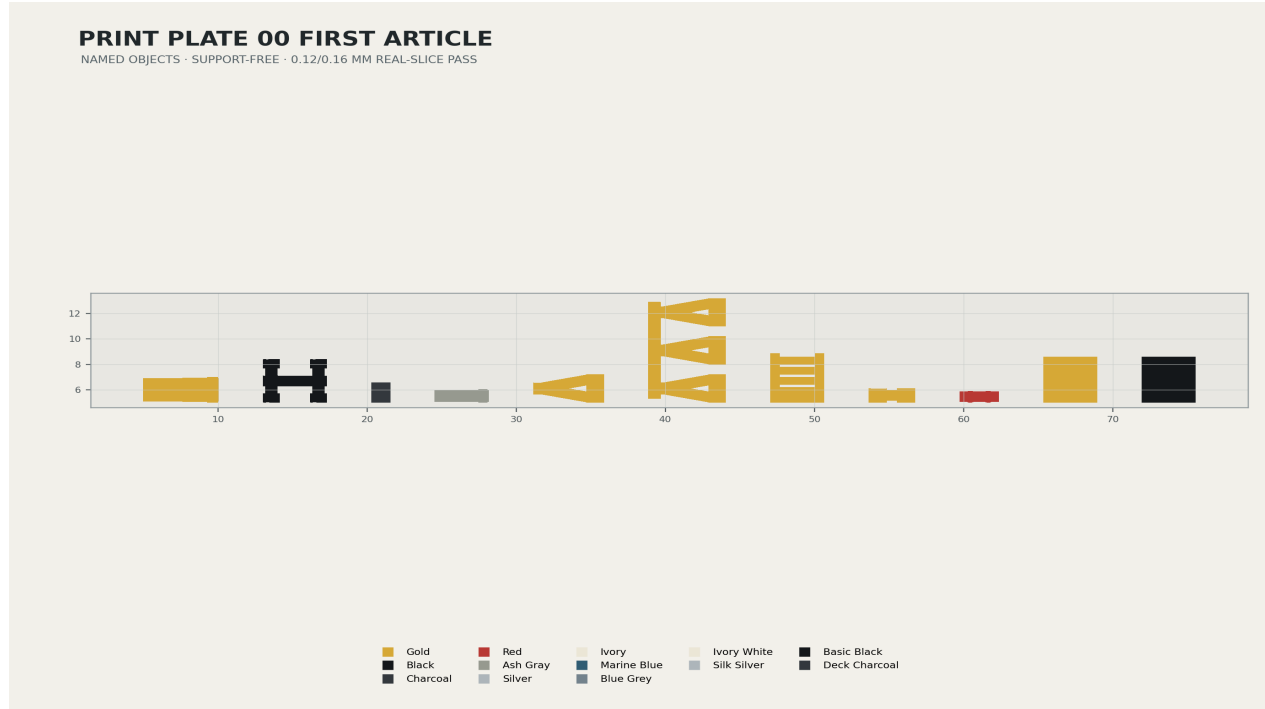

## Print

- 100% scale; 0.40 mm nozzle; PLA; three walls; 0.12 mm preferred layer. Record printer, filament, XY and elephant-foot compensation.
- A single-material geometry test is acceptable before no-paint color production. No supports are expected.

## Physical evaluation checklist

| Check                  | Acceptance / recorded result                                           |
|------------------------|------------------------------------------------------------------------|
| Tow tractor            | four wheels visible; body and dark insert complete                     |
| Service cart           | body, wheels and equipment envelope retained                           |
| Tow bar / sprue        | forks present; 0.80 mm gates clip cleanly                              |
| Maintenance ladder     | all five rungs retained; flat print releases without curl              |
| Chocks / extinguishers | paired wedges, bottles, handle and wheels present                      |
| Alignment coupon       | male/female assemble by hand at 0.20 mm per side; no force or cracking |
| Layers / warnings      | continuous at 0.12 and 0.16 mm; no slicer warnings                     |
| Physical status        | PASS / FAIL / NOT RUN; date, operator and notes                        |

## Repository gate

Automated geometry and slicer validation does not equal a physical pass. The repository remains NOT RUN until the user reports the completed print and settings.