


CVN-69 Island Interface Coupon

ONE-PAGE PRINT / FIT / GLUE TEST · RUN BEFORE THE PRODUCTION ISLAND

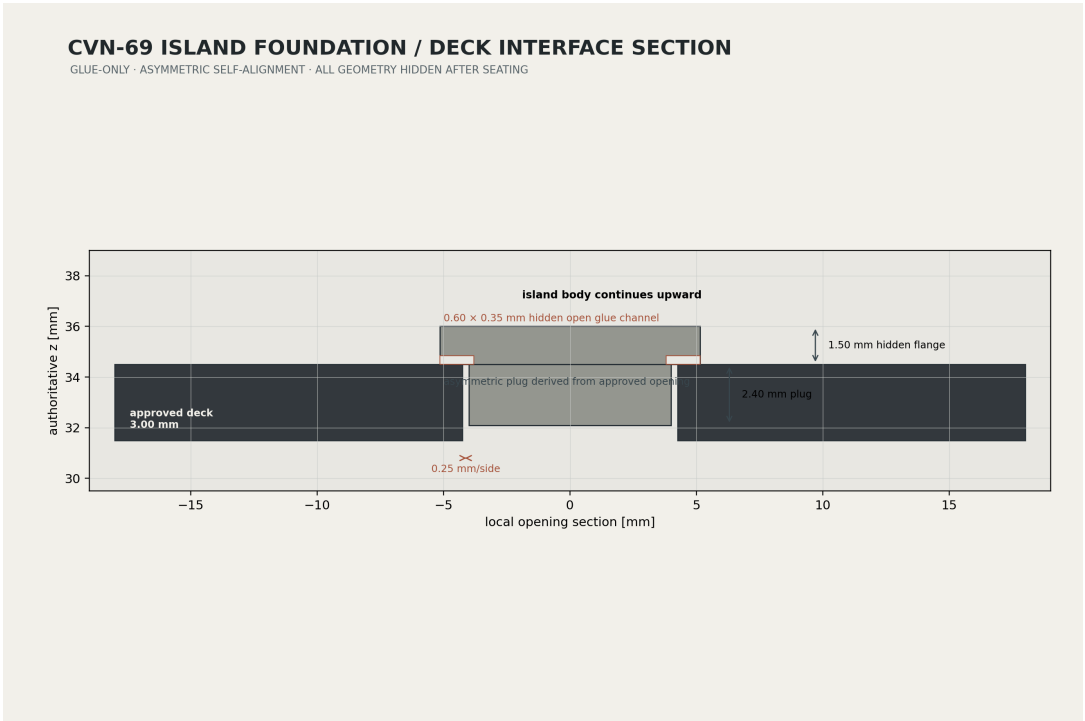

Feature	Exact production value
Female geometry	approved asymmetric island opening
Male geometry	opening inset 0.25 mm per side
Insertion	2.40 mm
Glue channels	0.60 mm wide × 0.35 mm deep; open
Coupon envelope	40 × 24 mm pieces; under 60 × 60 × 25 mm

Procedure

- Print both named objects at 100% with the same printer, 0.4 mm nozzle, PLA, layer height, and XY/elephant-foot compensation planned for production.
- Remove brim without filing nominal male/female walls. Dry-fit by hand; do not force.
- Pass when the broad faces seat fully, the fit does not rock, and no wall cracks or whitens.
- Apply the intended adhesive sparingly through the open channels, seat fully, cure, and record the result.
- If it fails, correct calibration or slicer compensation and repeat. Do not scale production files.