


# CVN-69 Hull–Flight-Deck Integration Drawings


MILESTONE 2 · 1:700 · 476.00 MM OVERALL · GLUE-ONLY · UNRELEASED REVIEW

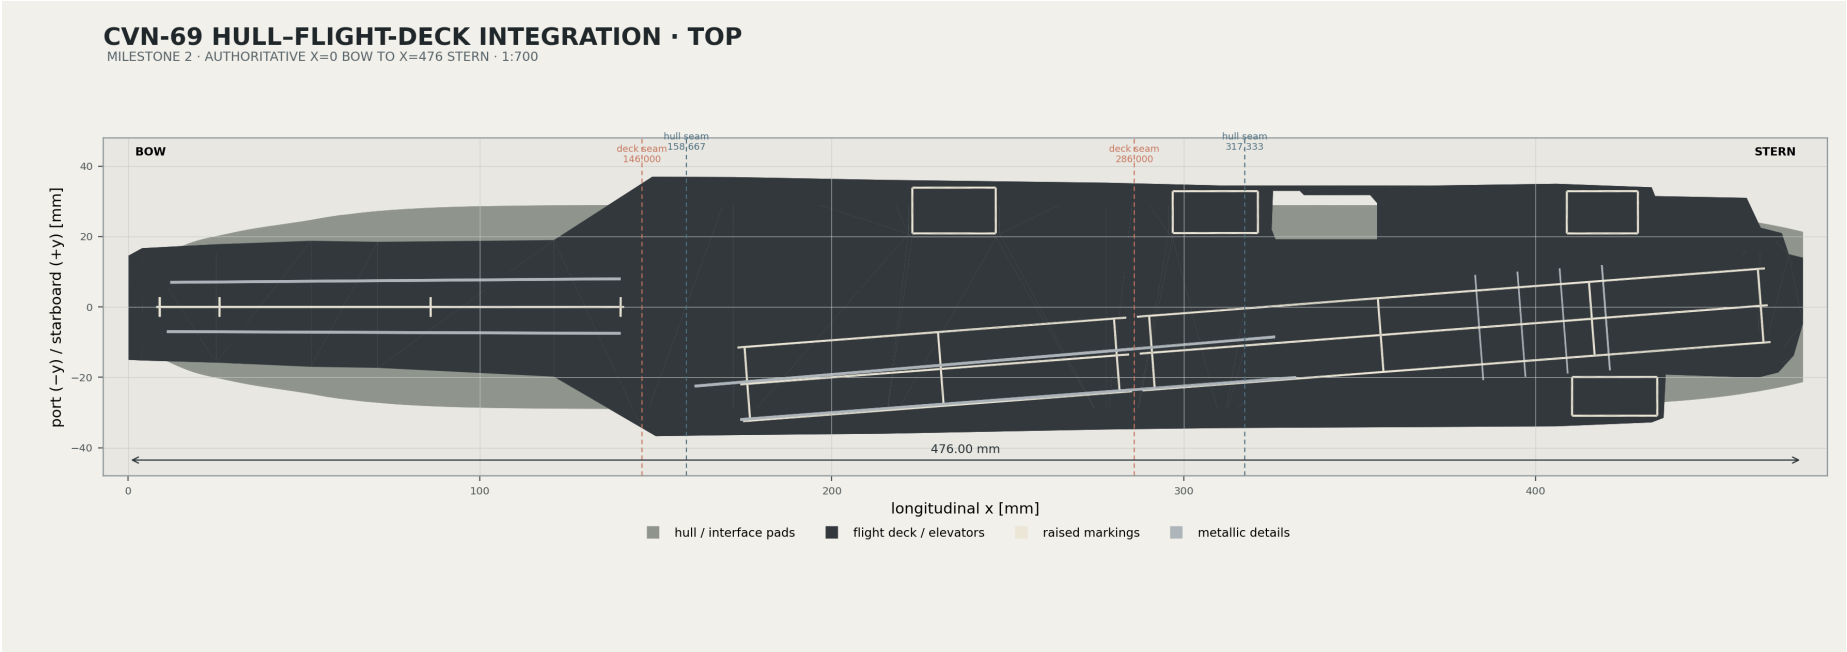

| Datum          | Authoritative definition              | Measured/nominal            |
|----------------|---------------------------------------|-----------------------------|
| X              | Bow to stern                          | 0.00 to 476.00 mm           |
| Y              | Port negative to starboard positive   | centerline y = 0.00 mm      |
| Z              | Vertical from hull keel datum         | deck underside z = 31.50 mm |
| Deck transform | Mirror approved deck about x = 238 mm | x' = 476 - x; y unchanged   |

# Module seam and interface station plan



Deck and hull seams remain intentionally staggered. Landing pads are paired at  $y = \pm 8$  mm and avoid all seams, elevators, and the island opening.

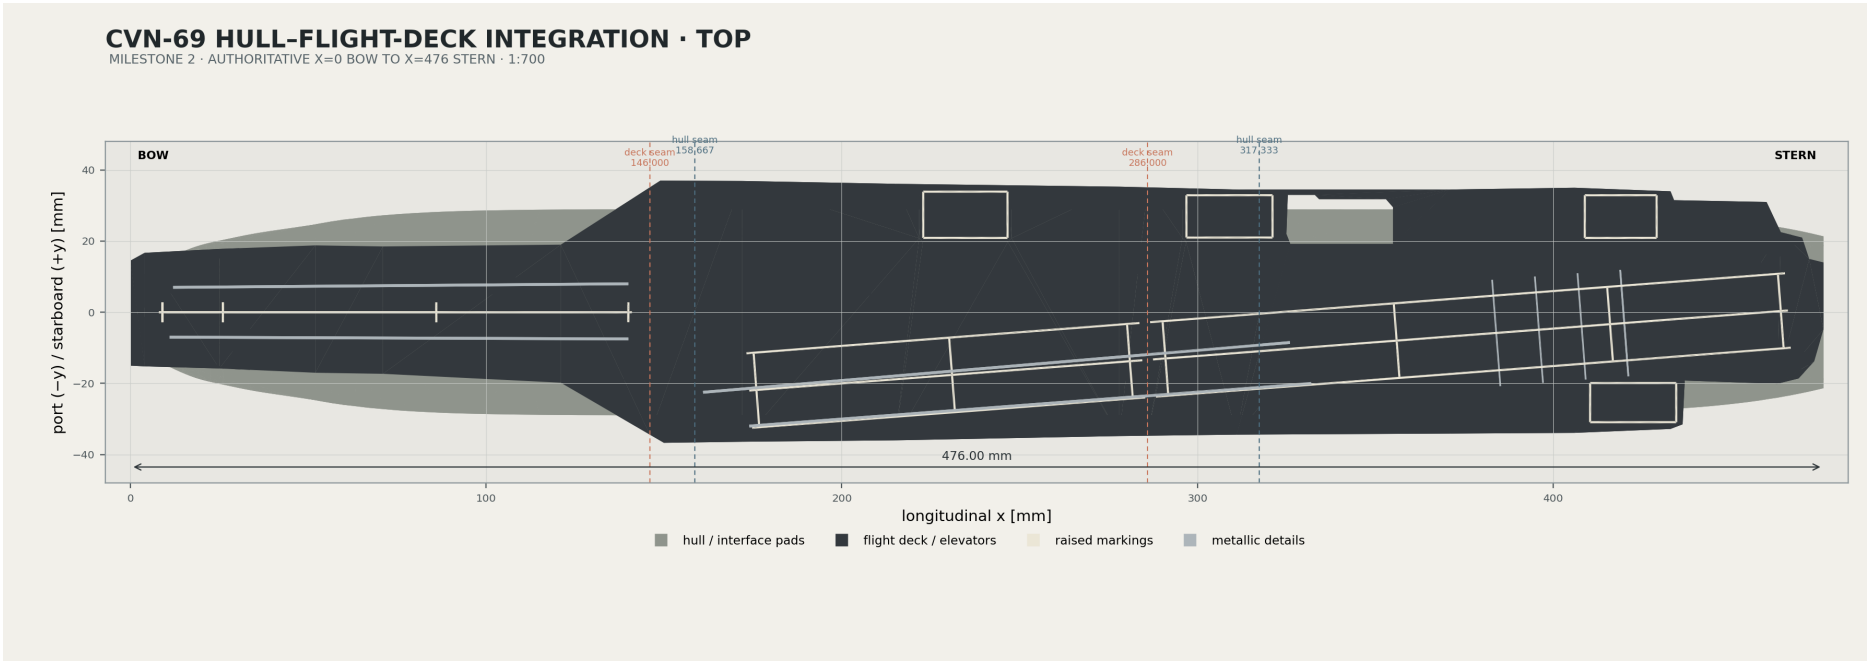

| Feature              | X positions (mm)            | Engineering purpose                           |
|----------------------|-----------------------------|-----------------------------------------------|
| Hull seams           | 158.667, 317.333            | Approved concealed hull keys                  |
| Deck seams           | 146.000, 286.000            | Staggered; supported over single hull modules |
| Landing-pad stations | 32, 105, 205, 270, 370, 445 | Paired port/starboard self-alignment          |

# Interface sections

The keyed pad supplies repeatable lateral/longitudinal registration. The remaining overlapping hull-top area supplies continuous support and hidden glue surface.

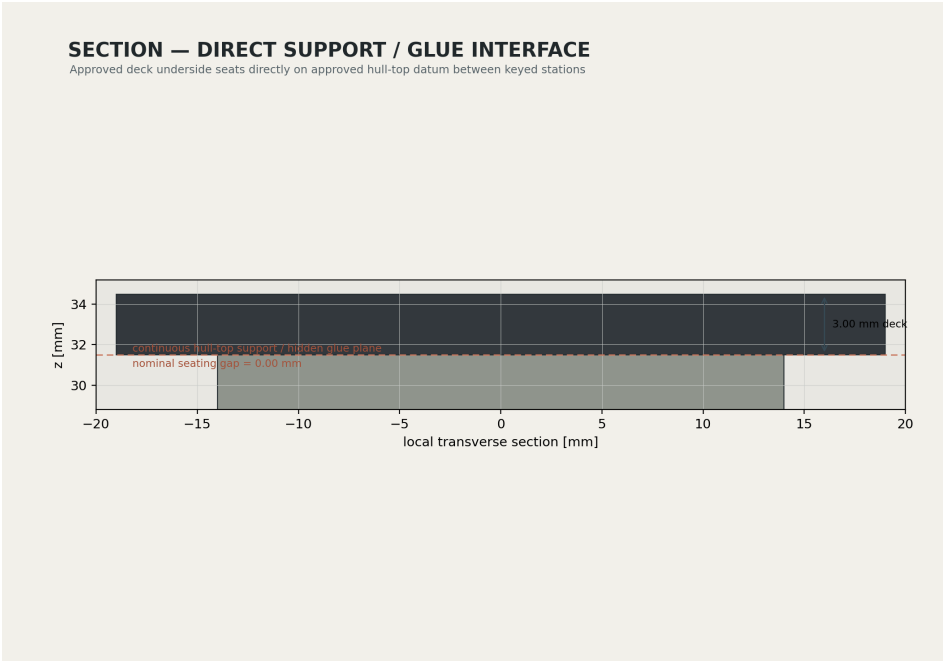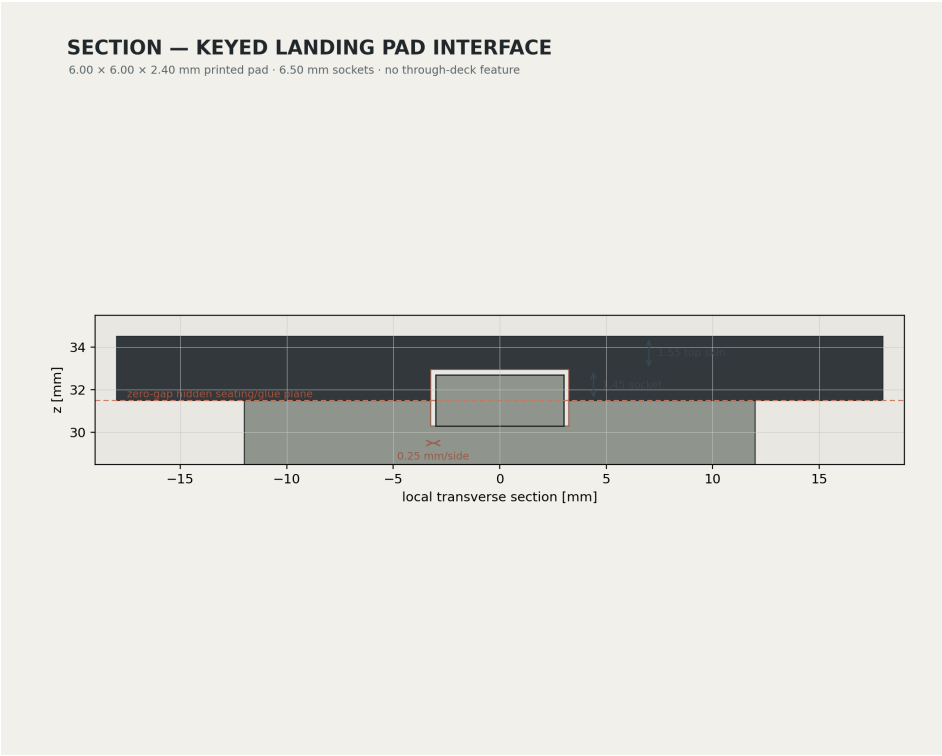


| Parameter      | Value                 | Requirement                      |
|----------------|-----------------------|----------------------------------|
| Pad            | 6.00 × 6.00 × 2.40 mm | Printed Ash Gray PLA             |
| Socket         | 6.50 × 6.50 mm        | 0.25 mm clearance per side       |
| Hull insertion | 1.20 mm               | Meets minimum structural feature |
| Deck socket    | 1.45 mm deep          | Leaves 1.55 mm top skin          |
| Seating gap    | 0.00 mm nominal       | ≤ 0.30 mm                        |

# Assembly and exploded reference

All sockets and pads are concealed after assembly. No magnets, screws, metal pins, heat-set inserts, or purchased connectors are used.

## CVN-69 MILESTONE 2 • EXPLODED HULL/DECK ASSEMBLY

HULL • TWELVE KEYED LANDING PADS • DECK MODULES • REMOVABLE DETAILS

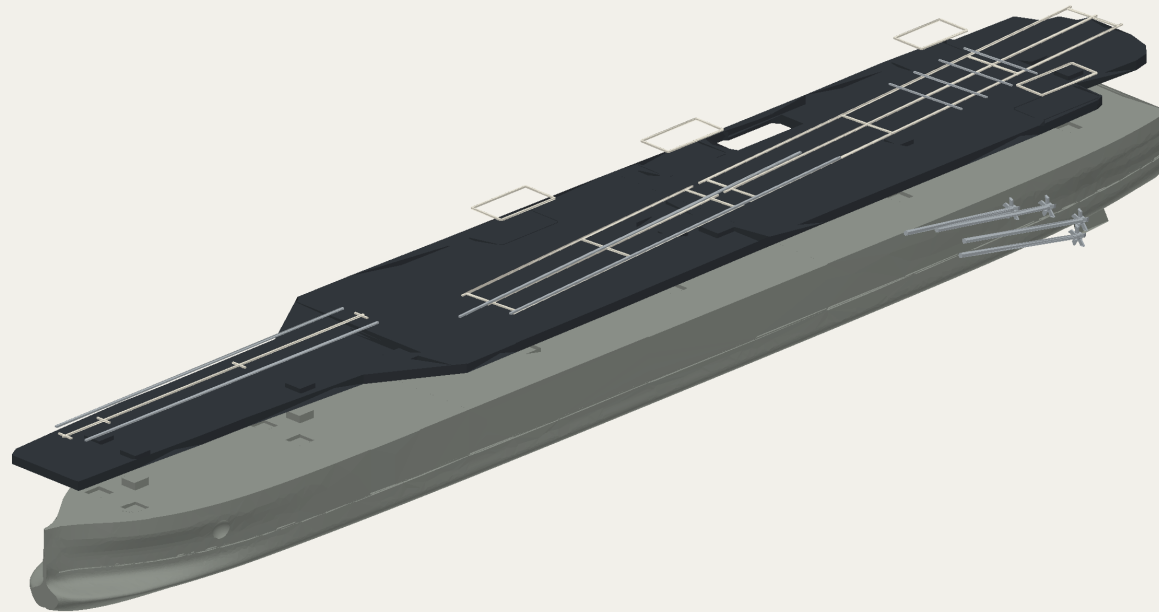

■ hull / interface pads ■ flight deck / elevators ■ raised markings ■ metallic details